

Math mode - v.2.09

Herbert Voß*

24th October 2005

Abstract

More than once people say that T_EX was designed for mathematical or technical purpose. This maybe true when we remember the reasons why Donald Knuth created T_EX. But nowadays there are a lot of examples where T_EX was used for publications without any mathematical or technical background. Nevertheless, we have to consider, that writing publications with a lot of mathematical material is one of the important advantages of T_EX and it seems that is impossible to know all existing macros and options of (L^A)T_EX and the several additional packages, especially $\mathcal{A}\mathcal{M}\mathcal{S}$ math. This is the reason why I tried to collect all important facts in this paper.

Please report typos or any other comments to this documentation to voss@perce.de. This document was written with the L^AT_EX editor Kile 1.8 (Qt 3.3 KDE 3.4) <http://sourceforge.net/projects/kile/> and the PDF output was built with the Linux version of V_TE_X/Free, Version 8.46 (<http://www.micropress-inc.com/linux/>)

This file can be redistributed and/or modified under the terms of the LaTeX Project Public License Distributed from CTAN archives in directory [CTAN://macros/latex/base/lppl.txt](http://ctan.org/ctan/latex/base/lppl.txt).

*Thanks for the feedback to: Hendri Adriaens; Alexander Boronka; Christian Faulhammer; José Luis Gómez Dans; Azzam Hassam; Martin Hensel; Morten Høgholm; M. Kalidoss; Dan Lasley; Angus Leeming; Tim Love; Hendrik Maryns; Heinz Mezera; David Neuway; Joachim Punter; Carl Riehm; Will Robertson; Christoph Rumsmüller; José Carlos Santos; Jens Schwaiger; Uwe Siart; Martin Sievers; Heiko Stamer; Uwe Stöhr; Carsten Thiel; David Weenink; Zou Yuan-Chuan; Michael Zedler; and last but not least a special thanks to Monika Hattenbach for her excellent job of proofreading.

Contents

	Page
I Standard \LaTeX math mode	3
1 Introduction	3
2 The Inlinemode	3
2.1 Limits	4
2.2 Fraction command	4
2.3 Math in Chapter/Section Titles	4
2.4 Equation numbering	5
2.5 Framed math	5
2.6 Linebreak	5
2.7 Whitespace	6
2.8 $\mathcal{A}\mathcal{M}\mathcal{S}$ math for the inline mode	6
3 Displaymath mode	6
3.1 <code>equation</code> environment	6
3.2 <code>eqnarray</code> environment	7
3.2.1 Short commands	8
3.3 Equation numbering	9
3.3.1 Changing the style	9
3.3.2 Resetting a counter style	9
3.3.3 Equation numbers on the left side	10
3.3.4 Changing the equation number style	10
3.3.5 More than one equation counter	10
3.4 Labels	11
3.5 Frames	11
4 <code>array</code> environment	13
4.1 Cases structure	13
4.2 <code>arraycolsep</code>	14
5 Matrix	15
6 Super/Subscript and limits	17
6.1 Multiple limits	17
6.2 Problems	18
7 Roots	18

8 Brackets, braces ...	19
8.1 Examples	21
8.1.1 Braces over several lines	21
8.1.2 Middle bar	22
8.2 New delimiters	22
8.3 Problems with parentheses	23
9 Text in math mode	23
10 Font commands	24
10.1 Old-style font commands	24
10.2 New-style font commands	24
11 Space	25
11.1 Math typesetting	25
11.2 Additional horizontal spacing	26
11.3 Problems	27
11.4 Dot versus comma	27
11.5 Vertical whitespace	28
11.5.1 Before/after math expressions	28
11.5.2 Inside math expressions	29
12 Styles	31
13 Dots	32
14 Accents	32
14.1 Over- and underbrackets	33
14.1.1 Use of <code>\underbracket{...}</code>	33
14.1.2 Overbracket	34
14.2 Vectors	34
15 Exponents and indices	35
16 Operators	35
17 Greek letters	36
18 Pagebreaks	38
19 <code>\stackrel</code>	38
20 <code>\choose</code>	38
21 Color in math expressions	39

22 Boldmath	39
22.1 Bold math titles and items	40
23 Multiplying numbers	41
24 Other macros	41
 II $\mathcal{A}\mathcal{M}\mathcal{S}$math package	 42
25 align environments	43
25.1 The default <code>align</code> environment	44
25.2 <code>alignat</code> environment	45
25.3 <code>flalign</code> environment	46
25.4 <code>xalignat</code> environment	47
25.5 <code>xxalignat</code> environment	48
25.6 <code>aligned</code> environment	48
25.7 Problems	48
 26 Other environments	 49
26.1 <code>gather</code> environment	49
26.2 <code>multline</code> environment	49
26.3 <code>split</code> environment	51
26.4 <code>Specials</code>	53
26.5 <code>cases</code> environment	53
26.6 Matrix environments	54
 27 Vertical whitespace	 55
 28 Dots	 55
 29 fraction commands	 56
29.1 Standard	56
29.2 Binoms	57
 30 Roots	 57
30.1 Roots with <code>\smash</code> command	58
 31 Accents	 58
 32 <code>\mod</code> command	 59
 33 Equation numbering	 59
33.1 Subequations	60
 34 Labels and tags	 61

35 Limits	61
35.1 Multiple limits	62
35.2 Problems	62
35.3 <code>\sideset</code>	63
36 Operator names	64
37 Text in math mode	65
37.1 <code>\text</code> command	65
37.2 <code>\intertext</code> command	66
38 Extensible arrows	67
39 Frames	68
40 Greek letters	69
41 Miscellaneous commands	69
III \TeX and math	70
42 Length registers	70
42.1 <code>\abovedisplayskip</code>	70
42.2 <code>\abovedisplayskip</code>	70
42.3 <code>\belowdisplayskip</code>	70
42.4 <code>\belowdisplayskip</code>	70
42.5 <code>\delimeterfactor</code>	70
42.6 <code>\delimitershortfall</code>	71
42.7 <code>\displayindent</code>	71
42.8 <code>\displaywidth</code>	72
42.9 <code>\mathsurround</code>	72
42.10 <code>\medmuskip</code>	72
42.11 <code>\mkern</code>	72
42.12 <code>\mskip</code>	72
42.13 <code>\muskip</code>	73
42.14 <code>\muskipdef</code>	73
42.15 <code>\nonscript</code>	73
42.16 <code>\nulldelimiterspace</code>	73
42.17 <code>\preplaysize</code>	73
42.18 <code>\scriptspace</code>	73
42.19 <code>\thickmuskip</code>	73
42.20 <code>\thinmuskip</code>	73
42.21 <code>\medmuskip</code>	74

43 Math font macros	74
43.1 <code>\delcode</code>	74
43.2 <code>\delimiter</code>	74
43.3 <code>\displaystyle</code>	74
43.4 <code>\fam</code>	75
43.5 <code>\mathaccent</code>	75
43.6 <code>\mathbin</code>	75
43.7 <code>\mathchar</code>	75
43.8 <code>\mathchardef</code>	76
43.9 <code>\mathchoice</code>	76
43.10 <code>\mathclose</code>	76
43.11 <code>\mathcode</code>	76
43.12 <code>\mathop</code>	77
43.13 <code>\mathopen</code>	77
43.14 <code>\mathord</code>	77
43.15 <code>\mathpunct</code>	77
43.16 <code>\mathrel</code>	77
43.17 <code>\scriptfont</code>	77
43.18 <code>\scriptscriptfont</code>	77
43.19 <code>\scriptscriptstyle</code>	78
43.20 <code>\scriptstyle</code>	78
43.21 <code>\skew</code>	78
43.22 <code>\skewchar</code>	78
43.23 <code>\textfont</code>	78
43.24 <code>\textstyle</code>	78
44 Math macros	79
44.1 <code>\above</code>	79
44.2 <code>\abovewithdelims</code>	79
44.3 <code>\atop</code>	79
44.4 <code>\atopwithdelims</code>	79
44.5 <code>\displaylimits</code>	79
44.6 <code>\eqno</code>	79
44.7 <code>\everydisplay</code>	80
44.8 <code>\everymath</code>	80
44.9 <code>\left</code>	80
44.10 <code>\leqno</code>	80
44.11 <code>\limits</code>	80
44.12 <code>\mathinner</code>	81
44.13 <code>\nolimits</code>	81
44.14 <code>\over</code>	81
44.15 <code>\overline</code>	81
44.16 <code>\overwithdelims</code>	81
44.17 <code>\radical</code>	81

44.18\right	82
44.19\underline	82
44.20\center	82
45 Math penalties	82
45.1 \binoppenalty	82
45.2 \displaywidowpenalty	82
45.3 \postdisplaypenalty	83
45.4 \predisdisplaypenalty	83
45.5 \relpenalty	83
 IV Other packages	 84
46 List of available math packages	84
47 accents	84
48 amscd – commutative diagrams	85
49 amsopn	85
50 bigdel	86
51 bm	87
52 braket	87
53 cancel	88
54 delarray	89
55 empheq	90
56 esint	91
57 eucal and euscript.sty	92
58 exscale	92
59 relsize	93
60 xypic	93
 V Special symbols	 95

61 Integral symbols	95
62 Harpoons	96
63 Bijective mapping arrow	97
64 Stacked equal sign	97
65 Other symbols	98
VI Examples	99
66 Matrix	99
66.1 Identity matrix	99
66.2 System of linear equations	99
67 Cases structure	99
67.1 Cases with numbered lines	100
68 Arrays	101
68.1 Quadratic equation	102
68.2 Vectors and matrices	103
68.3 Cases with (eqn)array environment	103
68.4 Arrays inside arrays	104
68.5 Colored cells	105
69 Over- and underbraces	106
69.1 Braces and roots	106
69.2 Overlapping braces	107
69.3 Vertical alignment	107
69.4 Alignment	108
70 Integrals	109
71 Vertical alignment	110
71.1 Example 1	110
71.2 Example 2	112
72 Node connections	114
73 Special Placement	115
73.1 Formulas side by side	115
73.2 Itemize environment	118

CONTENTS

VII	Lists, bibliography and index	120
	List of Figures	121
	List of Tables	122
	Bibliography	123
	Index	125

CONTENTS

Part I

Standard L^AT_EX math mode

1 Introduction

The following sections describe all the math commands which are available without any additional package. Most of them also work with special packages and some of them are redefined. At first some important facts for typesetting math expressions.

2 The Inlinemode

As the name says this are always math expressions which are in a standard textline, like this one: $f(x) = \int_a^b \frac{\sin x}{x} dx$. There are no limitations for the height of the math expressions, so that the layout may be very lousy if you

insert a big matrix in an inline mode like this: $\underline{A} = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & i \end{bmatrix}$. In this

case it is better to use the `\smallmatrix` environment $\underline{A} = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & i \end{bmatrix}$ from the `\mathcal{M}`Smath package (see section 26.6 on page 54) or the displaymath mode (section 3 on page 6).

This inline mode is possible with three different commands:

$$\sum_{i=1}^n i = \frac{1}{2}n \cdot (n+1)$$

$$\sum_{i=1}^n i = \frac{1}{2}n \cdot (n+1)$$

$$\sum_{i=1}^n i = \frac{1}{2}n \cdot (n+1)$$

```

1 \(\sum_{i=1}^n i = \frac{1}{2}n \cdot (n+1)\)
   \[10pt]
2 $\sum_{i=1}^n i = \frac{1}{2}n \cdot (n+1)$
   $\[10pt]
3 \begin{math}
4   \sum_{i=1}^n i = \frac{1}{2}n \cdot (n+1)
5 \end{math}

```

1. `\(... \)`, the problem is that `\(` is not a robust macro (see section 2.3 on the next page). `\(...\)`

2. `$... $` `$...$`

3. `\begin{math} ... \end{math}`, also not robust `\begin{math}`

`...`
`\end{math}`

In general `$...$` is the best choice, but this does not work in environments like `verbatim` or `alltt`. In this case `\(...\)` works.

2.1 Limits

In the inline mode the limits are by default only in super or subscript mode and the fractions are always in the scriptstyle¹ font size. For example: $\int_1^\infty \frac{1}{x^2} dx = 1$, which is not too big for the textline. You can change this with the command `\limits`, which must follow a math operator² like an integral (`\int`), a sum (`\sum`), a product (`\prod`) or a limes (`\lim`). But this $\int_1^\infty \frac{1}{x^2} dx = 1$ does not look very nice in a text line when it appears between two lines, especially when there are multiline limits.³

`\limits`
`\int`
`\lim`
`\prod`
`\sum`

2.2 Fraction command

For inlined formulas the fractions are by default in the scriptstyle (see tabular 8 on page 31), which is good for typesetting $y = \frac{a}{b+1}$, because the linespacing is nearly the same, but not optimal, when the formula shows some important facts. There are two solutions to get a better reading:

`\frac`

1. choose the display mode instead of the inline mode, which is the better one;
2. set the fontstyle to `\displaystyle`, which makes the fraction $y = \frac{a}{b+1}$ more readable but the linespacing increases which is always a bad solution and should only be used when the first solution makes no sense.⁴

$$y = \frac{a}{b+1} = \frac{a}{b+1}$$

`$y=\frac{a}{b+1}=\{\displaystyle\frac{a}{b+1}\}$`

2.3 Math in `\part`, `\chapter`, `\section`, ... titles like $f(x) = \prod_{i=1}^n (i - \frac{1}{2i})$

All commands which appear in positions like contents, index, header, ... must be robust⁵ which is the case for `$...$` but not for `\(...\)`. If you do not have any contents, index, a.s.o. you can write the mathstuff in `\chapter`, `\section`, a.s.o without any restriction. Otherwise use `\protect\(...\)` or the `$...$` version.

The whole math expression appears in the default font shape and not in bold like the other text. Section 22.1 on page 40 describes how the math expressions can be printed also in bold.

`\texorpdfstring`

¹See section 12 on page 31.

²To define a new operator see page 64

³For more information about limits see section 6.1 on page 17 or section 35 on page 61.

⁴For an abbreviation see section 29 on page 56, there is a special `\dfrac` macro.

⁵**robust** means that the macro is not expanded before it is moved into for example the tableofcontents file (`*.toc`). No robustness is often a problem, when a macro is part of another macro.

There are problems with `hyperref` when there is a non text part in a title. It is possible to tell `hyperref` to use different commands, one for the title and another one for the bookmarks:

`\texorpdfstring{<TeX part>}{<hyperref part>}`

E.g.

```
1 \texorpdfstring{$\int f(x)\,dx$}{Integral function}
```

2.4 Equation numbering

It is obvious that the numbering of inline mathstuff makes no sense!

2.5 Framed math

With the `\fbox` macro everything of inline math can be framed, like the following one:

$f(x) = \prod_{i=1}^n \left(i - \frac{1}{2i}\right)$	<pre>1 \fbox{\$f(x)=\prod_{i=1}^n\left(i-\frac{1}{2i}\right)\$}</pre>
--	---

Parameters are the width of `\fboxsep` and `\fboxrule`, the predefined values from `latex.ltx` are:

```
1 \fboxsep = 3pt
2 \fboxrule = .4pt
```

The same is possible with the `\colorbox` $f(x) = \prod_{i=1}^n \left(i - \frac{1}{2i}\right)$ from the `color` package.

```
1 \colorbox{yellow}{$f(x)=\prod_{i=1}^n\left(i-\frac{1}{2i}\right)$}
```

2.6 Linebreak

\LaTeX can break an inline formula only when a relation symbol ($=, <, >, \dots$) or a binary operation symbol ($+, -, \dots$) exists and at least one of these symbols appears at the outer level of a formula. Thus $\$a+b+c\$$ can be broken across lines, but $\${a+b+c}\$$ not.

- The default: $f(x) = a_n x^n + a_{n-1} x^{n-1} + a_{n-2} x^{n-2} + \dots + a_i x^i + a_2 x^2 + a_1 x^1 + a_0$

- The same inside a group $\{\dots\}$: $f(x) = a_n x^n + a_{n-1} x^{n-1} + a_{n-2} x^{n-2} + \dots + a_i x^i + a_2 x^2 + a_1 x^1 -$

- Without any symbol: $f(x) = a_n (a_{n-1} (a_{n-2} (\dots) \dots) \dots)$

If it is not possible to have any mathsymbol, then split the inline formula in two or more pieces ($\$ \dots \$ \$ \dots \$$). If you do not want a linebreak for the whole document, you can set in the preamble:

```
\relpenalty=9999
\binoppenalty=9999
```

which is the extreme case of grudgingly allowing breaks in extreme cases.

2.7 Whitespace

L^AT_EX defines the length `\mathsurround` with the default value of `0pt`. This length is added before and after an inlined math expression (see table 1).

foo	$f(x) = \int_1^\infty \frac{1}{x^2} dx = 1$	bar	1	<code>foo \fbox{\$ f(x)=\int_1^{\infty}\frac{1}{x^2}dx=1 \$} bar</code>
foo	$f(x) = \int_1^\infty \frac{1}{x^2} dx = 1$	bar	1	<code>foo \rule{20pt}{\ht\strutbox}\fbox{\$ f(x)=\int_1^{\infty}\frac{1}{x^2}dx=1 \$}\rule{20pt}{\ht\strutbox} bar</code>
foo	$f(x) = \int_1^\infty \frac{1}{x^2} dx = 1$	bar	1 2	<code>\setlength{\mathsurround}{20pt} foo \fbox{\$ f(x)=\int_1^{\infty}\frac{1}{x^2}dx=1 \$} bar</code>

Table 1: Meaning of `\mathsurround`

2.8 $\mathcal{A}\mathcal{M}\mathcal{S}$ math for the inline mode

None of the $\mathcal{A}\mathcal{M}\mathcal{S}$ math-functions are available in inline mode.

3 Displaymath mode

This means, that every formula gets its own paragraph (line). There are some differences in the layout to the one from the title of 2.3.

3.1 equation environment

For example:

$$f(x) = \prod_{i=1}^n \left(i - \frac{1}{2i} \right) \quad (1)$$

```
1 \begin{equation}
2   f(x)=\prod_{i=1}^n\left(i-\frac{1}{2i}\right)
3 \end{equation}
```

The delimiters `\begin{equation} ... \end{equation}` are the only difference to the inline version. There are some equivalent commands for the display-math mode:

- | | |
|---|--|
| | <code>\begin{displaymath}</code>
<code>...</code>
<code>\end{displaymath}</code> |
| 1. <code>\begin{displaymath}... \end{displaymath}</code> , same as <code>\[... \]</code> | |
| 2. <code>\[... \]</code> . (see above) the short form of a displayed formula, no number | <code>\[... \]</code> |

$$f(x) = \prod_{i=1}^n \left(i - \frac{1}{2i} \right)$$

displayed, no number. Same as 1.

- | | |
|--|--|
| 3. <code>\begin{equation}... \end{equation}</code> | <code>\begin{equation}</code>
<code>...</code>
<code>\end{equation}</code> |
|--|--|

$$f(x) = \prod_{i=1}^n \left(i - \frac{1}{2i} \right) \quad (2)$$

displayed, a sequential equation number, which may be reset when starting a new chapter or section.

- | | |
|--|------------------------|
| (a) There is only one equation number for the whole environment. | <code>\nonumber</code> |
| (b) There exists no star-version of the equation environment because <code>\[... \]</code> is the equivalent. With the tag <code>\nonumber</code> it is possible to suppress the equation number: | |

$$f(x) = [...]$$

```

1 \begin{equation}
2   f(x) = [...] \nonumber
3 \end{equation}

```

3.2 eqnarray environment

This is by default an array with three columns and as many rows as you like. It is nearly the same as an array with a `rc1` column definition.

It is **not possible** to change the internal behaviour of the `eqnarray` environment without rewriting the environment. It is always an implicit array with **three** columns and the horizontal alignment **right-center-left** (`rc1`) and small **symbol** sizes for the middle column. All this can not be changed by the user without rewriting the whole environment in `latex.ltx`.

$$\frac{1}{\sqrt{n}} = \frac{\sqrt{n}}{n} = \frac{n}{n\sqrt{n}}$$

```

1 \begin{eqnarray*}
2 \mathrm{left} & \& \mathrm{middle} & \& \mathrm{right} \\
3 \frac{1}{\sqrt{n}} & = & \frac{\sqrt{n}}{n} & = & \frac{n}{n\sqrt{n}} \\
4 \end{eqnarray*}

```

The `eqnarray` environment should not be used as an array. As seen in the above example the typesetting is wrong for the middle column. The numbering of `eqnarray` environments is always for every row, means, that four lines get four different equation numbers (for the labels see section 3.4):

$y = d$	(3)	<pre> 1 \begin{eqnarray} 2 y & = & d \backslash label{eq:2} \backslash \backslash 3 y & = & cx+d \backslash \backslash 4 y & = & bx^{\{2\}}+cx+d \backslash \backslash 5 y & = & ax^{\{3\}}+bx^{\{2\}}+cx+ & & d \backslash label{eq:5} 6 \end{eqnarray} </pre>
$y = cx + d$	(4)	
$y = bx^2 + cx + d$	(5)	
$y = ax^3 + bx^2 + cx + d$	(6)	

Toggling numbering off/on for **all** rows is possible with the starred version of `eqnarray`.

$y = d$		<pre> 1 \begin{eqnarray*} 2 y & = & d \backslash label{eq:3} \backslash \backslash 3 y & = & cx+d \backslash \backslash 4 y & = & bx^{\{2\}}+cx+d \backslash \backslash 5 y & = & ax^{\{3\}}+bx^{\{2\}}+cx+d \backslash & & label{eq:4} 6 \end{eqnarray*} </pre>
$y = cx + d$		
$y = bx^2 + cx + d$		
$y = ax^3 + bx^2 + cx + d$		

Toggling off/on for **single** rows is possible with the above mentioned `\nonumber` tag at the end of a row (before the newline command). For example:

$y = d$		<pre> 1 \begin{eqnarray} 2 y & = & d \backslash nonumber \backslash \backslash 3 y & = & cx+d \backslash nonumber \backslash \backslash 4 y & = & bx^{\{2\}}+cx+d \backslash nonumber & & \backslash \backslash 5 y & = & ax^{\{3\}}+bx^{\{2\}}+cx+d 6 \end{eqnarray} </pre>
$y = cx + d$		
$y = bx^2 + cx + d$		
$y = ax^3 + bx^2 + cx + d$	(7)	

3.2.1 Short commands

It is possible to define short commands for the `eqnarray` environment

```

1 \makeatletter
2 \newcommand{\be}{%
3   \begin{group}
4   % \setlength{\arraycolsep}{2pt}
5   \eqnarray%
6   \@ifstar{\nonumber}{}%
7 }
8 \newcommand{\ee}{\endeqnarray\endgroup}
9 \makeatother

```

Now you can write the whole equation as

$$f(x) = \int \frac{\sin x}{x} dx \quad (8)$$

```

1 \be
2 f(x) &= \int \frac{\sin x}{x} dx
3 \ee

```

or, if you do not want to have a numbered equation as

$$f(x) = \int \frac{\sin x}{x} dx$$

```

1 \be*
2 f(x) &= \int \frac{\sin x}{x} dx
3 \ee

```

3.3 Equation numbering

For all equations which can have one or more equation numbers (for every line/row) the numbering for the whole equation can be disabled with switching from the unstarred to the star version. This is still for the whole formula and doesn't work for single rows. In this case use the `\nonumber` tag.

- This doc is written with the article-class, which counts the equations continuously over all parts/sections. You can change this behaviour in different ways (see the following subsections).
- In standard L^AT_EX it is a problem with too long equations and the equation number, which may be printed with the equation one upon the other. In this case use the $\mathcal{A}\mathcal{M}\mathcal{S}$ math package, where the number is set above or below of a too long equation (see equation 28 on page 21).
- For counting subequations see section 33.1 on page 60.

3.3.1 Changing the style

With the beginning of Section 25.2 on page 45 the counting changes from “47” into the new style “II-54”. The command sequence is

```

1 \renewcommand\theequation{%
2 \thepart-\arabic{equation}%
3 }

```

`\theequation`

See section 33 on page 59 for the $\mathcal{A}\mathcal{M}\mathcal{S}$ math command.

3.3.2 Resetting a counter style

Removing a given reset is possible with the package `remreset`.⁶ Write into the preamble

```

1 \makeatletter
2 \@removefromreset{equation}{section}
3 \makeatother

```

`\@removefromreset`

or anywhere in the text.

Now the equation counter is no longer reset when a new section starts. You can see this after section 26.3 on page 51.

⁶CTAN://macros/latex/contrib/supported/carlsle/remreset.sty

3.3.3 Equation numbers on the left side

Choose package `leqno`⁷ or have a look at your document class, if such an option exists.

3.3.4 Changing the equation number style

The number style can be changed with a redefinition of

```
\def\@eqnnum{\normalfont \normalcolor (\theequation)}
```

For example: if you want the numbers not in parentheses write

```
1 \makeatletter
2 \def\@eqnnum{\normalfont \normalcolor \theequation}
3 \makeatother
```

For \mathcal{M} Smath there is another macro, see section 33 on page 59.

3.3.5 More than one equation counter

You can have more than the default equation counter. With the following code you can easily toggle between roman and arabic equation counting.

```
1 %code by Heiko Oberdiek
2 \makeatletter
3 %Roman counter
4 \newcounter{roem}
5 \renewcommand{\theroem}{\roman{roem}}
6
7 % save the original counter
8 \newcommand{\c@org@eq}{}
9 \let\c@org@eq\c@equation
10 \newcommand{\org@theeq}{}
11 \let\org@theeq\theequation
12
13 %\setroem sets roman counting
14 \newcommand{\setroem}{
15   \let\c@equation\c@roem
16   \let\theequation\theroem}
17
18 %\setarab the arabic counting
19 \newcommand{\setarab}{
20   \let\c@equation\c@org@eq
21   \let\theequation\org@theeq}
22 \makeatother
```

The following examples show how it works:

⁷CTAN://macros/latex/unpacked/leqno.sty

$$f(x) = \int \sin x dx \quad (9)$$

$$g(x) = \int \frac{1}{x} dx \quad (10)$$

$$F(x) = -\cos x \quad (\text{i})$$

$$G(x) = \ln x \quad (\text{ii})$$

$$f'(x) = \sin x \quad (11)$$

$$g'(x) = \frac{1}{x} \quad (12)$$

```

1 \begin{align}
2 f(x) &= \int \sin x dx \label{eq:arab1} \\
3 g(x) &= \int \frac{1}{x} dx \\
4 \end{align}
5 %
6 \setroem
7 %
8 \begin{align}
9 F(x) &= -\cos x \\
10 G(x) &= \ln x \label{eq:rom1} \\
11 \end{align}
12 %
13 \setarab
14 %
15 \begin{align}
16 f^{\prime}(x) &= \sin x \\
17 g^{\prime}(x) &= \frac{1}{x} \label{eq:arab2} \\
18 \end{align}

```

There can be references to these equations in the usual way, like eq.9, 12 and for the roman one eq.ii.

3.4 Labels

Every numbered equation can have a label to which a reference is possible.

- There is one restriction for the label names, they cannot include one of L^AT_EX's command characters.⁸
- The label names are replaced by the equation number.

If you do not want a reference to the equation number but to a self defined name then use the \mathcal{M} smath command `\tag{...}`, which is described in section 34 on page 61.

`\tag`

3.5 Frames

Similar to the inline mode, displayed equations can also be framed with the `\fbox` command, like equation 13. The only difference is the fact, that the equation must be packed into a parbox or minipage. It is nearly the same for a colored box, where the `\fbox{...}` has to be replaced with `\colorbox{yellow}{...}`. The package `color.sty` must be loaded and – important – the `calc.sty` package to get a correct boxwidth.

$$f(x) = \int_1^{\infty} \frac{1}{x^2} dx = 1 \quad (13)$$

⁸\$_ \wedge \& \% \{ \}

```

1 \noindent\fbbox{\parbox{\linewidth-2\fbboxsep-2\fbboxrule}{%
2 \begin{equation}\label{eq:frame0}
3 f(x)=\int_1^{\infty}\dfrac{1}{x^2}dx=1
4 \end{equation}%
5 }}

```

If the equation number should not be part of the frame, then it is a bit complicated. There is one tricky solution, which puts an unnumbered equation just beside an empty numbered equation. The `\hfill` is only useful for placing the equation number right aligned, which is not the default. The following four equations 14-17 are the same, only the second one written with the `\myMathBox` macro which has the border and background color as optional arguments with the defaults `white` for background and `black` for the frame. If there is only one optional argument, then it is still the one for the frame color (15).

```

1 \makeatletter
2 \def\myMathBox{\@ifnextchar[{\my@MBoxi}{\my@MBoxi[black]}}
3 \def\my@MBoxi[#1]{\@ifnextchar[{\my@MBoxii[#1]}{\my@MBoxii
4 [#1][white]}}
5 \def\my@MBoxii[#1][#2]#3#4{%
6 \par\noindent%
7 \fcolorbox{#1}{#2}{%
8 \parbox{\linewidth-\labelwidth-2\fbboxrule-2\fbboxsep}{#3}
9 }%
10 \parbox{\labelwidth}{%
11 \begin{equation}\label{#4}\end{equation}%
12 }%
13 \par%
14 }
15 \makeatother

```

$$f(x) = x^2 + x \quad (14)$$

$$f(x) = x^2 + x \quad (15)$$

$$f(x) = x^2 + x \quad (16)$$

$$f(x) = x^2 + x \quad (17)$$

```

1 \begin{equation}\label{eq:frame2}
2 f(x)=x^2 +x
3 \end{equation}
4 \myMathBox[red]{\left[f(x)=x^2 +x\right]}{eq:frame3}

```

4 ARRAY ENVIRONMENT

```
5 \myMathBox[red][yellow]{\[f(x)=x^2 +x\]}{eq:frame4}
6 \myMathBox{\[f(x)=x^2 +x\]}{eq:frame5}
```

If you are using the $\mathcal{A}\mathcal{M}\mathcal{S}$ math package, then try the solutions from section 39 on page 68.

4 array environment

This is simply the same as the `equarray` environment only with the possibility of variable rows **and** columns and the fact, that the whole formula has only **one** equation number and that the `array` environment can only be part of another math environment, like `equation` or `displaymath`.

```
\begin{array}
...
\end{array}
```

$$\left. \begin{array}{ll} \text{a)} & y = c \quad (\text{constant}) \\ \text{b)} & y = cx + d \quad (\text{linear}) \\ \text{c)} & y = bx^2 + cx + d \quad (\text{square}) \\ \text{d)} & y = ax^3 + bx^2 + cx + d \quad (\text{cubic}) \end{array} \right\} \text{Polynomes} \quad (18)$$

```

1 \begin{equation}
2 \left. \begin{array}{rcl}
3 \quad \quad \quad & & \\
4 \quad \quad \quad & & \\
5 \quad \text{\texttt{\textit{a}}} & \& y & = & \& c & \& \text{(constant)} \\
6 \quad \text{\texttt{\textit{b}}} & \& y & = & \& cx+d & \& \text{(linear)} \\
7 \quad \text{\texttt{\textit{c}}} & \& y & = & \& bx^{\text{\texttt{\textit{2}}}}+cx+d & \& \text{(square)} \\
8 \quad \text{\texttt{\textit{d}}} & \& y & = & \& ax^{\text{\texttt{\textit{3}}}}+bx^{\text{\texttt{\textit{2}}}}+cx+d & \& \text{(cubic)} \\
9 \end{array} \right\} \\
10 \right. \quad \text{\texttt{\textit{Polynomes}}} \\
11 \end{equation}

```

The horizontal alignment of the columns is the same as the one from the `tabular` environment.

For arrays with delimiters see section 54 on page 89.

4.1 Cases structure

If you do not want to use the `\mathcalM` package then write your own cases structure with the `array` environment:

```

1 \begin{equation}
2 x=\left\{\begin{array}{c}
3 0 & \text{if } A=\dots \\
4 1 & \text{if } B=\dots \\
5 x & \text{this runs with as much text as you like, but without an} \\
& \text{raggeright text.}\end{array}\right.
6 \end{equation}

```

$$x = \begin{cases} 0 & \text{if } A=\dots \\ 1 & \text{if } B=\dots \\ x & \text{this runs with as much text as you like, but without an raggeright text.} \end{cases} \quad (19)$$

It is obvious, that we need a `\parbox` if the text is longer than the possible linewidth.

```

1 \begin{equation}
2 x = \left\{\begin{array}{l}
3 \begin{array}{l}
4 0 & \text{if } A=\dots \\
5 1 & \text{if } B=\dots \\
6 x & \text{this runs with as much text as you like} \\
& \text{because an automatic linebreak is given with} \\
& \text{a raggedright text. Without this} \\
& \text{\raggedright command, you'll get a formatted} \\
& \text{text like the following one ... but with a parbox ... it works}
\end{array}
7 \end{array}
8 \right.
9 \end{equation}

```

$$x = \begin{cases} 0 & \text{if } A=\dots \\ 1 & \text{if } B=\dots \\ x & \begin{array}{l} \text{this runs with as much text as you} \\ \text{like, because an automatic linebreak} \\ \text{is given with a raggedright text.} \\ \text{Without this command, you'll get a} \\ \text{formatted text like the following one} \\ \text{... but with a parbox ... it works} \end{array} \end{cases} \quad (20)$$

4.2 arraycolsep

`\arraycolsep`

All the foregoing math environments use the `array` to typeset the math expression. The predefined separation between two columns is the length `\arraycolsep`, which is set by nearly all document classes to `5pt`, which seems to be too big. The following equation is typeset with the default value and the second one with `\arraycolsep=1.4pt`

5 MATRIX

$$\boxed{f(x)} \quad \boxed{=} \quad \boxed{\int \frac{\sin x}{x} dx}$$

$$\boxed{f(x)} \boxed{=} \boxed{\int \frac{\sin x}{x} dx}$$

If this modification should be valid for all arrays/equations, then write it into the preamble, otherwise put it into a group or define your own environment as done in section 3.2.1 on page 8.

```
1 \bgroup
2 \arraycolsep=1.4pt
3 \begin{eqnarray}
4 f(x) & = & \int \frac{\sin x}{x} dx
5 \end{eqnarray}
6 \egroup
```

```
1 \makeatletter
2 \newcommand{\be}{%
3   \begin{group}
4     \setlength{\arraycolsep}{1.4pt}
5   [ ... ]
```

5 Matrix

T_EX knows two macros and L^AT_EX one more for typesetting a matrix:

`\matrix`
`\bordermatrix`

$$\begin{matrix} A & B & C \\ d & e & f \\ 1 & 2 & 3 \end{matrix}$$

```
1 $\begin{matrix}
2   A & B & C \\
3   d & e & f \\
4   1 & 2 & 3 \\
5 \end{matrix}$
```

$$\begin{matrix} & 0 & 1 & 2 \\ 0 & \left(\begin{matrix} A & B & C \end{matrix} \right) \\ 1 & \left(\begin{matrix} d & e & f \end{matrix} \right) \\ 2 & \left(\begin{matrix} 1 & 2 & 3 \end{matrix} \right) \end{matrix}$$

```
1 $\bordermatrix{%
2   & 0 & 1 & 2 \\
3   0 & A & B & C \\
4   1 & d & e & f \\
5   2 & 1 & 2 & 3 \\
6 }$
```

The first two macros are listed here for some historical reason, because the `array` or especially the `AMSmath` package offers the same or better macros/environments. Nevertheless it is possible to redefine the `bordermatrix` macro to get other parentheses and a star version which takes the left top part as matrix:

5 MATRIX

$$\begin{matrix} & 1 & 2 \\ \begin{matrix} 1 \\ 2 \\ 3 \end{matrix} & \begin{pmatrix} x1 & x2 \\ x3 & x4 \\ x5 & x6 \end{pmatrix} \end{matrix}$$

```
1 $\bordermatrix{%
2   & 1 & 2 \cr
3 1 & x1 & x2 \cr
4 2 & x3 & x4 \cr
5 3 & x5 & x6
6 }$
```

$$\begin{matrix} & 1 & 2 \\ \begin{matrix} 1 \\ 2 \\ 3 \end{matrix} & \begin{bmatrix} x1 & x2 \\ x3 & x4 \\ x5 & x6 \end{bmatrix} \end{matrix}$$

```
1 $\bordermatrix[{}]{%
2   & 1 & 2 \cr
3 1 & x1 & x2 \cr
4 2 & x3 & x4 \cr
5 3 & x5 & x6
6 }$
```

$$\begin{matrix} & 1 & 2 \\ \begin{matrix} 1 \\ 2 \\ 3 \end{matrix} & \left\{ \begin{matrix} x1 & x2 \\ x3 & x4 \\ x5 & x6 \end{matrix} \right\} \end{matrix}$$

```
1 $\bordermatrix[\{\}\]{%
2   & 1 & 2 \cr
3 1 & x1 & x2 \cr
4 2 & x3 & x4 \cr
5 3 & x5 & x6
6 }$
```

$$\begin{matrix} & \begin{pmatrix} x1 & x2 \\ x3 & x4 \\ x5 & x6 \end{pmatrix} \\ \begin{matrix} 1 \\ 1 \\ 1 \end{matrix} & \begin{matrix} 1 \\ 2 \\ 3 \end{matrix} \end{matrix}$$

```
1 $\bordermatrix*{%
2 x1 & x2 & 1 \cr
3 x3 & x4 & 2 \cr
4 x5 & x6 & 3 \cr
5 1 & 2
6 }$
```

$$\begin{matrix} & \begin{bmatrix} x1 & x2 \\ x3 & x4 \\ x5 & x6 \end{bmatrix} \\ \begin{matrix} 1 \\ 1 \\ 1 \end{matrix} & \begin{matrix} 1 \\ 2 \\ 3 \end{matrix} \end{matrix}$$

```
1 $\bordermatrix*[{}]{%
2 x1 & x2 & 1 \cr
3 x3 & x4 & 2 \cr
4 x5 & x6 & 3 \cr
5 1 & 2
6 }$
```

$$\begin{matrix} & \left\{ \begin{matrix} x1 & x2 \\ x3 & x4 \\ x5 & x6 \end{matrix} \right\} \\ \begin{matrix} 1 \\ 1 \\ 1 \end{matrix} & \begin{matrix} 1 \\ 2 \\ 3 \end{matrix} \end{matrix}$$

```
1 $\bordermatrix*[\{\}\]{%
2 x1 & x2 & 1 \cr
3 x3 & x4 & 2 \cr
4 x5 & x6 & 3 \cr
5 1 & 2
6 }$
```

There is now an optional argument for the parenthesis with () as the default one. To get such a behaviour, write into the preamble:

```
1 \makeatletter
2 \newif\if@borderstar
3 \def\bordermatrix{\@ifnextchar*{%
4   \@borderstartrue\bordermatrix@i}{\@borderstarfalse\bordermatrix@i*}%
5 }
6 \def\bordermatrix@i*{\@ifnextchar[{\bordermatrix@ii}{\bordermatrix@ii[()]}%
7 \def\bordermatrix@ii[#1]#2{%
```

```

8 \begingroup
9 \m@th\@tempdima8.75\p@\setbox\z@\vbox{%
10 \def\cr{\crr\noalign{\kern 2\p@\global\let\cr\endline }}%
11 \ialign {##$\hfil\kern 2\p@\kern\@tempdima & \thinspace %
12 \hfil $$$\hfil && \quad\hfil $$$\hfil\crr\omit\strut %
13 \hfil\crr\noalign{\kern -\baselineskip}\#2\crr\omit %
14 \strut\cr}}%
15 \setbox\tw@\vbox{\unvcopy\z@\global\setbox\@ne\lastbox}%
16 \setbox\tw@\hbox{\unhbox\@ne\unskip\global\setbox\@ne\lastbox}%
17 \setbox\tw@\hbox{%
18 $\kern\wd\@ne\kern -\@tempdima\left\@firstoftwo#1%
19 \if@borderstar\kern2pt\else\kern -\wd\@ne\fi%
20 \global\setbox\@ne\vbox{\box\@ne\if@borderstar\else\kern 2\p@\fi}%
21 \vcenter{\if@borderstar\else\kern -\ht\@ne\fi%
22 \unvbox\z@\kern-\if@borderstar2\fi\baselineskip}%
23 \if@borderstar\kern-2\@tempdima\kern2\p@\else\,\fi\right\
24 } \null \; \vbox{\kern\ht\@ne\box\tw@}%
25 \endgroup
26 }
27 \makeatother

```

The `matrix` macro cannot be used together with the $\mathcal{A}\mathcal{M}\mathcal{S}$ math package, it redefines this macro (see section 26.6 on page 54).

6 Super/Subscript and limits

Writing a_{min} and a_{max} gives the same depth for the subscript, but writing them in upright mode with `\mbox` gives a different depth: a_{\min} and a_{\max} . The problem is the different height, which can be modified in several ways

- $\$a_{\{\mbox{\vphantom{i}}\max\}}$: a_{\min} and a_{\max} ;
- $\$a_{\{\mathrm{max}\}}$: a_{\min} and a_{\max} ;
- $\$a_{\{\max\}}$: a_{\min} and a_{\max} . Both are predefined operators (see section 16 on page 35).

6.1 Multiple limits

For general information about limits read section 2.1 on page 4. With the `\atop` command multiple limits for a sum or prod are possible. The syntax is:

`\atop`

above
below

```
1 \[ {above \atop below} \]
```

which is nearly the same as a fraction without a rule. This can be enhanced to `a\atop b\atop c` and so on. For equation 21 do the following steps:

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad (21)$$

```

1 \begin{equation}\label{eq:atop}
2 \sum_{\{1\le j\le p\atop \{
3   \{1\le j\le q\atop 1\le k\le r\}\}\}}
4   a_{ij}b_{jk}c_{ki}
5 \end{equation}

```

There are other solutions to get multiple limits, e.g. an array, which is not the best solution because the space between the lines is too big. The $\mathcal{A}\mathcal{M}\mathcal{S}$ math package provides several commands for limits (section 35) and the `\underset` and `\overset` commands (see section 41).

6.2 Problems

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad (22)$$

The equation 22 shows that the horizontal alignment is not optimal, because the math expression on the right follows at the end of the limits which are a unit together with the sum symbol. There is an elegant solution with $\mathcal{A}\mathcal{M}\mathcal{S}$ math, described in subsection 35.2 on page 62. If you do not want to use $\mathcal{A}\mathcal{M}\mathcal{S}$ math, then use `\makebox`. But there is a problem when the general fontsize is increased, `\makebox` knows nothing about the actual math font size. Equation 23a shows the effect and equation 23b the view without the boxes.

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad (23a)$$

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad (23b)$$

```

1 \begin{equation}
2 \sum_{\{\makebox[0pt]{\scriptscriptstyle
3   \{1\le j\le p\atop \{
4   \{1\le j\le q\atop 1\le k\le r\}\}\}}
5   \}} a_{ij}b_{jk}c_{ki}
6 \end{equation}

```

7 Roots

The square root `\sqrt{x}` is the default for \LaTeX and the n -th root can be inserted with the optional parameter `\sqrt[n]{...}`. .

`\sqrt`

$$\sqrt{x} \quad \sqrt[3]{x}$$

```

1 \begin{equation}
2 \sqrt{a}\backslash,\%
3 \sqrt{T}\backslash,\%
4 \sqrt{2\alpha} k_{-B_1T^{-i}}\backslash\label{eq:root1}
5 \end{equation}

```

```

1 \begin{equation}\label{eq:root2}
2 \sqrt{a\,\mathrm{vphantom{k_{B_1}T^{-i}}}},\%
3 \sqrt{T\,\mathrm{vphantom{k_{B_1}T^{-i}}}},\%
4 \sqrt{2^{\alpha}\,k_{B_1}T^{-i}}
5 \end{equation}

```

8 Brackets, braces and parentheses

`\leftX`
`\rightX`

$\backslash\mathrm{big}X$
 $\backslash\mathrm{Big}X$
 $\backslash\mathrm{bigg}X$
 $\backslash\mathrm{Bigg}X$

¹⁰See section 8.1.1 on page 21 for example.

Only a few commands can be written in a short form like `\big(`. The “X” has to be replaced with one of the following characters or commands from table 3, which shows the parentheses character, its code for the use with one of the “big” commands and an example with the code for that.

For all commands there exists a left/right version `\bigl`, `\bigr`, `\Bigl` and so on, which only makes sense when writing things like:

$$\begin{aligned} & \left. \right) \times \frac{a}{b} \times \left(\quad (26) \end{aligned}$$

$$\begin{aligned} & \left. \right) \times \frac{a}{b} \times \left(\quad (27) \end{aligned}$$

```

1 \begin{align}
2   \biggl) \times \frac{a}{b} \times \biggr(
3 \end{align}
4 \begin{align}
5   \bigg) \times \frac{a}{b} \times \bigg(
6 \end{align}

```

`\biglX``\bigrX`

L^AT_EX takes the `\biggl` as a mathopen symbol, which has by default another horizontal spacing.

In addition to the above additional commands there exist some more: `\bigm`, `\Bigm`, `\biggm` and `\Biggm`, which work as the standard ones (without the additional “m”) but add some more horizontal space between the delimiter and the formula before and after (see table 2).

`\bigmX``\bigmX`

$$3 \left| a^2 - b^2 - c^2 \right| + 2$$

$$3 \left| a^2 - b^2 - c^2 \right| + 2$$

```

1 $3\bigg|a^2-b^2-c^2\bigg|+2$

```

```

1 $3\biggm|a^2-b^2-c^2\biggm|+2$

```

Table 2: Difference between the default `\bigg` and the `\biggm` command

Char	Code	Example	Code
()	()	$3(a^2 + b^{c^2})$	<code>3\Big(a^2+b^{c^2}\Big)</code>
[]	[]	$3[a^2 + b^{c^2}]$	<code>3\Big[a^2+b^{c^2}\Big]</code>
/ \	<code>/\backslash</code>	$3/a^2 + b^{c^2}\backslash$	<code>3\Big/ a^2+b^{c^2}\Big\backslash</code>
{ }	<code>\{\}</code>	$3\{a^2 + b^{c^2}\}$	<code>3\Big\{ a^2+b^{c^2}\Big\}</code>
	<code> \Vert</code>	$3 a^2 + b^{c^2} $	<code>3\Big a^2+b^{c^2}\Big\Vert</code>
⌊ ⌋	<code>\lfloor \rfloor</code>	$3\lfloor a^2 + b^{c^2} \rfloor$	<code>3\Big\lfloor a^2+b^{c^2}\Big\rfloor</code>

Char	Code	Example	Code
[]	<code>\lceil\rfloor</code>	$3\left[a^2 + b^{c^2}\right]$	<code>3\Big\lceil a^2+b^{c^2}</code> <code>\Big\rceil</code>
< >	<code>\langle\rangle</code>	$3\left\langle a^2 + b^{c^2}\right\rangle$	<code>3\Big\langle</code> <code>a^2+b^{c^2}\Big\rangle</code>
↑ ↑	<code>\uparrow</code> <code>\Uparrow</code>	$3\uparrow a^2 + b^{c^2}\Uparrow$	<code>3\Big\uparrow</code> <code>a^2+b^{c^2}\Big\Uparrow</code>
↓ ↓	<code>\downarrow</code> <code>\Downarrow</code>	$3\downarrow a^2 + b^{c^2}\Downarrow$	<code>3\Big\downarrow</code> <code>a^2+b^{c^2}\Big\Downarrow</code>
↕ ↕	<code>\updownarrow</code> <code>\Updownarrow</code>	$3\updownarrow a^2 + b^{c^2}\Updownarrow$	<code>3\Big\updownarrow</code> <code>a^2+b^{c^2}\Big\Updownarrow</code>

Table 3: Use of the different parentheses for the “big” commands

8.1 Examples

8.1.1 Braces over several lines

The following equation in the single line mode looks like

$$\frac{1}{2}\Delta(f_{ij}f^{ij}) = 2 \left(\sum_{i<j} \chi_{ij}(\sigma_i - \sigma_j)^2 + f^{ij}\nabla_j\nabla_i(\Delta f) + \nabla_k f_{ij}\nabla^k f^{ij} + f^{ij}f^k[2\nabla_i R_{jk} - \nabla_k R_{ij}] \right) \quad (28)$$

and is too long for the text width and the equation number has to be placed under the equation.¹¹ With the array environment the formula can be split in two smaller pieces:

$$\begin{aligned} \frac{1}{2}\Delta(f_{ij}f^{ij}) = 2 \left(\sum_{i<j} \chi_{ij}(\sigma_i - \sigma_j)^2 + f^{ij}\nabla_j\nabla_i(\Delta f) + \right. \\ \left. + \nabla_k f_{ij}\nabla^k f^{ij} + f^{ij}f^k[2\nabla_i R_{jk} - \nabla_k R_{ij}] \right) \end{aligned} \quad (29)$$

It is obvious that there is a problem with the right closing parentheses. Because of the two pairs “`\left(... \right)`” and “`\left. ... \right)`” they have a different size because every pair does it in its own way. Using the `\Bigg` command changes this into a better typesetting:

¹¹In standard L^AT_EX the equation and the number are printed one over the other for too long formulas. Only $\mathcal{A}\mathcal{M}\mathcal{S}$ math puts it one line over (left numbers) or under (right numbers) the formula.

$$\frac{1}{2}\Delta(f_{ij}f^{ij}) = 2\left(\sum_{i<j}\chi_{ij}(\sigma_i - \sigma_j)^2 + f^{ij}\nabla_j\nabla_i(\Delta f) + \nabla_k f_{ij}\nabla^k f^{ij} + f^{ij}f^k[2\nabla_i R_{jk} - \nabla_k R_{ij}]\right) \quad (30)$$

```

1 {\arraycolsep=2pt
2 \begin{equation}
3 \begin{array}{rcl}
4 \frac{1}{2}\Delta(f_{ij}f^{ij}) & = & 2\Bigg(\displaystyle
5 \sum_{i<j}\chi_{ij}(\sigma_i - \sigma_j)^2 + f^{ij}\nabla_j\nabla_i(\Delta f) + \\
6 \nabla_k f_{ij}\nabla^k f^{ij} + f^{ij}f^k[2\nabla_i R_{jk} - \nabla_k R_{ij}] \\
7 & & \Bigg)
8 \end{array}
9 \end{equation}
10 }
11 }
```

Section 26.4 on page 53 shows another solution for getting the right size for parentheses when breaking the equation in smaller pieces.

$$B(r, \phi, \lambda) = \frac{\mu}{r} \left[\sum_{n=2}^{\infty} \left(\left(\frac{R_e}{r} \right)^n J_n P_n(s\phi) + \sum_{m=1}^n \left(\frac{R_e}{r} \right)^n (C_{nm} \cos m\lambda + S_{nm} \sin m\lambda) P_{nm}(s\phi) \right) \right]$$

```

1 \begin{align*}
2 B(r, \phi, \lambda) &= \frac{\mu}{r} \Bigg[ \sum_{n=2}^{\infty} \left( \left( \frac{R_e}{r} \right)^n J_n P_n(s\phi) \right. \\
3 &\quad \left. + \sum_{m=1}^n \left( \frac{R_e}{r} \right)^n (C_{nm} \cos m\lambda + S_{nm} \sin m\lambda) P_{nm}(s\phi) \right) \Bigg] \\
4 & \\
5 \end{align*}
6 \end{align*}
```

8.1.2 Middle bar

See section 52 on page 87 for examples and the use of package `braket.sty`.

8.2 New delimiters

The default delimiters are defined in the file `fontmath.ltx` which is stored in general in `[TEXMF]/tex/latex/base/fontmath.ltx`. If we need for example a thicker vertical symbol than the existing `\vert` symbol we can define in the preamble:

```

1 \DeclareMathDelimiter{\Norm}
2   {\mathord}{\largesymbols}{"3E}{\largesymbols}{"3E}

```

The character number $3E_{16}$ (decimal 62) from the `cmex10` font is the small thick vertical rule. Now the new delimiter `\Norm` can be used in the usual way:

$$\left| \frac{|*BLA*|}{|*BLUB*|} \right|$$

```

1 $\left\backslash\Norm *BLA* \right\backslash\Norm$
2
3 $\left\backslash\Norm \dfrac{*BLA*}{*BLUB*} \right\backslash\Norm$
4

```

8.3 Problems with parentheses

It is obvious that the following equation has not the right size of the parenthesis in the second integral, the inner one should be a bit smaller than the outer one.

$$\int_{\gamma} F'(z) dz = \int_{\alpha}^{\beta} F'(\gamma(t)) \cdot \gamma'(t) dt$$

```

1 \[
2 \int_{\alpha}^{\beta} F'(\gamma(t)) \cdot \gamma'(t) dt
3 F'\left(\gamma(t)\right) \cdot \gamma'(t) dt
4 \]

```

The problem is that `TeX` controls the height of the parenthesis with `\delimitershortfall` and `\delimiterfactor`, with the default values

```

\delimitershortfall=5pt
\delimiterfactor=901

```

`\delimiterfactor/1000` is the relative size of the parenthesis for a given formula environment. They could be of `\delimitershortfall` too short. These values are valid at the end of the formula, the best way is to set them straight before the math environment or globally for all in the preamble.

$$\int_{\gamma} F'(z) dz = \int_{\alpha}^{\beta} F'(\gamma(t)) \cdot \gamma'(t) dt$$

```

1 {\delimitershortfall=-1pt
2 \[
3 \int_{\alpha}^{\beta} F'(\gamma(t)) \cdot \gamma'(t) dt
4 F'\left(\gamma(t)\right) \cdot \gamma'(t) dt
5 \]}

```

9 Text in math mode

Standard text in math mode should be written in upright shape and not in the italic one. This shape is reserved for the variable names: *I am text inside math.* (see also (7 on page 26). There are different ways to write text inside math.

- `\mathrm`. It is like math mode (no spaces), but in upright mode
- `\textrm`. Upright mode with printed spaces (real textmode)

```

\textstyle
\mbox
\mathrm

```


11 SPACE

Command	Test
default	<i>ABCDEFGHIJKLMNOPQRSTUVWXYZ</i> <i>abcdefghijklmnopqrstuvwxyz</i>
<code>\mathfrak</code>	<i>ABCDEFGHIJKLMNOPQRSTUVWXYZ</i> <i>abcdefghijklmnopqrstuvwxyz</i>
<code>\mathcal</code> ^a	<i>ABCDEFGHIJKLMNOPQRSTUVWXYZ</i> <i>abcdefghijklmnopqrstuvwxyz</i>
<code>\mathsf</code>	<i>ABCDEFGHIJKLMNOPQRSTUVWXYZ</i> <i>abcdefghijklmnopqrstuvwxyz</i>
<code>\mathbb</code> ^a	<i>ABCDEFGHIJKLMNOPQRSTUVWXYZ</i> <i>abcdefghijklmnopqrstuvwxyz</i>
<code>\mathtt</code>	<i>ABCDEFGHIJKLMNOPQRSTUVWXYZ</i> <i>abcdefghijklmnopqrstuvwxyz</i>
<code>\mathit</code>	<i>ABCDEFGHIJKLMNOPQRSTUVWXYZ</i> <i>abcdefghijklmnopqrstuvwxyz</i>
<code>\mathrm</code>	<i>ABCDEFGHIJKLMNOPQRSTUVWXYZ</i> <i>abcdefghijklmnopqrstuvwxyz</i>
<code>\mathbf</code>	<i>ABCDEFGHIJKLMNOPQRSTUVWXYZ</i> <i>abcdefghijklmnopqrstuvwxyz</i>
<code>\mathds</code> ^b	<i>ABCDEFGHIJKLMNOPQRSTUVWXYZ</i> <i>abcdefghijklmnopqrstuvwxyz</i>

^aNot available for lower letters. For mathcal exists a non free font for lower letters (<http://www.yandy.com>)

^bNeeds package dsfont.sty

Table 5: Fonts in math mode

11 Space

11.1 Math typesetting

L^AT_EX defines the three math lengths¹² with the following values¹³:

```
1 \thinmuskip=3mu
2 \medmuskip=4mu plus 2mu minus 4mu
3 \thickmuskip=5mu plus 5mu
```

\thinmuskip
\medmuskip
\thickmuskip

where `mu` is the abbreviation for `math unit`.

$$1\text{mu} = \frac{1}{18}\text{em}$$

These lengths can have all glue and are used for the horizontal spacing in math expressions where \TeX puts spaces between symbols and operators. The meaning of these different horizontal skips is shown in table 6. For a better typesetting \LaTeX inserts different spaces between the symbols.

\thinmuskip space between ordinary and operator atoms

`\medmuskip` space between ordinary and binary atoms in display and text styles

¹²For more information see: <http://www.tug.org/utilities/plain/cseq.html>

¹³see `fontmath.ltx`

default	$f(x) = x^2 + 3x_0 \cdot \sin x$
<code>\thinmuskip=0mu</code>	$f(x) = x^2 + 3x_0 \cdot \sin x$
<code>\medmuskip=0mu</code>	$f(x) = x^2 + 3x_0 \cdot \sin x$
<code>\thickmuskip=0mu</code>	$f(x) = x^2 + 3x_0 \cdot \sin x$
all set to zero	$f(x) = x^2 + 3x_0 \cdot \sin x$

Table 6: The meaning of the math spaces

`\thickmuskip` space between ordinary and relation atoms in display and text styles

11.2 Additional horizontal spacing

Positive Space		Negative Space	
<code>\$ab\$</code>	$a \mid b$		<code>\thinspace</code>
<code>\$a \, b\$</code>	$a \mid b$		<code>\medspace</code>
<code>\$a \; b\$</code>	$a \mid b$		<code>\thickspace</code>
<code>\$\mbox{\textvisiblespace}b\$</code>	$a \mid b$		<code>\negthinspace</code>
<code>\$a\,b\$</code> (<code>\$a\thinspace b\$</code>)	$a \mid b$	<code>\$a\! \, b\$</code>	$a \mid b$
<code>\$a\; b\$</code> (<code>\$a\medspace b\$</code>)	$a \mid b$	<code>\$a\negmedspace b\$</code>	$a \mid b$
<code>\$a\; b\$</code> (<code>\$a\thickspace b\$</code>)	$a \mid b$	<code>\$a\negthickspace b\$</code>	$a \mid b$
<code>\$a\quad b\$</code>	$a \mid b$		
<code>\$a\qquad b\$</code>	$a \mid b$		
<code>\$a\hspace{0.5cm}b\$</code>	$a \mid b$	<code>\$a\hspace{-0.5cm}b\$</code>	$a \mid b$
<code>\$a\kern0.5cm b\$</code>	$a \mid b$	<code>\$a\kern-0.5cm b\$</code>	$a \mid b$
<code>\$a\hphantom{xx}b\$</code>	$a \mid b$		
<code>\$axxb\$</code>	$a \mid xx \mid b$		

Table 7: Spaces in math mode

LaTeX defines the following short commands:

```
\def\>{\mskip\medmuskip}
\def\;{\mskip\thickmuskip}
\def\!{\mskip-\thinmuskip}
```

In math mode there is often a need for additional tiny spaces between variables, e.g. $L \frac{di}{dt}$ written with a tiny space between L and $\frac{di}{dt}$ looks nicer: $L \frac{di}{dt}$. Table 7 shows a list of all commands for horizontal space which can

be used in math mode. The “space” is seen “between” the boxed a and b. For all examples a is `\boxed{a}` and b is `\boxed{b}`. The short forms for some spaces may cause problems with other packages. In this case use the long form of the commands.

`\hspace`
`\hphantom`
`\kern`

11.3 Problems

Using `\hphantom` in mathmode depends to on object. `\hphantom` reserves only the space of the exact width without any additional space. In the following example the second line is wrong: `& \hphantom{\rightarrow} b\`. It does not reserve any additional space.

$a \rightarrow b$ b b b	<pre> 1 \begin{align*} 2 a & \& \rightarrow b\\ 3 & \& \hphantom{\rightarrow} b\\ 4 & \& \mkern\thickmuskip\hphantom{\rightarrow}\mkern\thickmuskip b\\ 5 & \& \mathrel{\hphantom{\rightarrow}} b\\ 6 \end{align*} </pre>
--	---

This only works when the math symbol is a mathrel one, otherwise you have to change the horizontal space to `\medmuskip` or `\thickmuskip`. For more informations about the math objects look into `fontmath.ltx` or `amssymb.sty` or use the `\show` macro, which prints out the type of the math-symbol, e.g.: `\show\rightarrow` with the output:

```

1 > \rightarrow=\mathchar"3221.
2 1.20 \show\rightarrow

```

The first digit represents the type:

- 0 : ordinary
- 1 : large operator
- 2 : binary operation
- 3 : relation
- 4 : opening
- 5 : closing
- 6 : punctuation
- 7 : variable family

Grouping a math symbol can change the behaviour in horizontal spacing. Compare 50×10^{12} and 50×10^{12} , the first one is typeset with `50×10^{12}` and the second one with `$50{\times}10^{12}$`. Another possibility is to use the `numprint` package.¹⁴

11.4 Dot versus comma

`\mathpunct`
`\mathord`

In difference to a decimal point and a comma as a marker of thousands a lot of countries prefer it vice versa. To get the same behaviour the meaning of

¹⁴CTAN://macros/latex/contrib/numprint/

dot and comma has to be changed:

$$1,234,567.89 \text{ default} \quad (32)$$

$$1.234.567,89 \text{ vice versa, wrong spacing} \quad (33)$$

$$1.234.567,89 \text{ correct spacing} \quad (34)$$

```

1 1,234,567.89 & \textrm{ default}\\
2 1.234.567,89 & \textrm{ vice versa, wrong spacing}\\
3 1\mathpunct{.}234\mathpunct{.}567{,}89 & \textrm{ correct
   spacing}

```

The original definitions from `fontmath.ltx`¹⁵ are

```

\DeclareMathSymbol{,}{\mathpunct}{letters}{"3B}
\DeclareMathSymbol{.}{\mathord}{letters}{"3A}

```

and can be changed for a documentwide other behaviour. In the above equation 34 the comma is only set in a pair of braces `{,}`, which is the same as writing `\mathord{,}` because LaTeX handles everything inside of parentheses as a formula, which gets the same spacing.

It is also possible to use the package `icomma.sty`¹⁶ for a documentwide correct spacing.

11.5 Vertical whitespace

11.5.1 Before/after math expressions

There are four predefined lengths, which control the vertical whitespace of displayed formulas:

```

\abovedisplayskip=12pt plus 3pt minus 9pt
\abovedisplayshortskip=0pt plus 3pt
\belowdisplayskip=12pt plus 3pt minus 9pt
\belowdisplayshortskip=7pt plus 3pt minus 4pt

```

The short skips are used if the formula starts behind the end of the foregoing last line. Only for demonstration the shortskips are set to 0pt in the following examples and the normal skips to 20pt without any glue:

¹⁵Located in `texmf/tex/latex/base/`

¹⁶CTAN:// macros/latex/contrib/was/

The line ends before.

$$f(x) = \int \frac{\sin x}{x} dx \quad (35)$$

The line doesn't end before the formula.

$$f(x) = \int \frac{\sin x}{x} dx \quad (36)$$

And the next line starts as usual with some text ...

```

1 \abovedisplayshortskip=0pt
2 \belowdisplayshortskip=0pt
3 \abovedisplayskip=20pt
4 \belowdisplayskip=20pt
5 \noindent The line ends before.
6 \begin{equation}
7   f(x) = \int \frac{\sin x}{x} dx
8 \end{equation}
9 \noindent The line doesn't end before the formula.
10 \begin{equation}
11   f(x) = \int \frac{\sin x}{x} dx
12 \end{equation}
13 \noindent And the next line starts as usual with some text
    ...

```

11.5.2 Inside math expressions

`\[<length>]` This works inside the math mode in the same way as in the text mode.

`\jot` The vertical space between the lines for all math expressions which allow multiple lines can be changed with the length `\jot`, which is predefined as

`\newdimen\jot \jot=3pt`

The following three formulas show this for the default value, `\jot=0pt` and `\jot=10pt`.

$y = d$	$y = d$	$y = d$
$y = c\frac{1}{x} + d$	$y = c\frac{1}{x} + d$	$y = c\frac{1}{x} + d$
$y = b\frac{1}{x^2} + cx + d$	$y = b\frac{1}{x^2} + cx + d$	$y = b\frac{1}{x^2} + cx + d$

Defining a new environment with a parameter makes things easier, because changes to the length are locally.

```

1 \newenvironment{mathspace}[1]{%
2   \setlength{\jot}{#1}%
3   \ignorespaces%
4 }{%
5   \ignorespacesafterend%
6 }

```

`\arraystretch` The vertical space between the lines for all math expressions which contain an `array` environment can be changed with the command `\arraystretch`, which is predefined as

```
\def\arraystretch{1}
```

Renewing this definition is global to all following math expressions, so it should be used in the same way as `\jot`.

`\vskip` Another spacing for single lines is possible with the `\vskip` macro:

$\begin{pmatrix} 0 & 1 & 1 & 0 & 0 & 1 \\ 1 & 0 & 0 & 1 & 1 & 0 \\ 0 & 1 & 1 & 0 & \frac{1}{\sqrt{2}} & 1 \\ 1 & 0 & 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & 1 & 0 & 1 \end{pmatrix}$	<pre> 1 \[2 \begin{pmatrix} 3 0 & 1 & 1 & 0 & 0 & 1 \\ 4 1 & 0 & 0 & 1 & 1 & 0 \\ 5 \noalign{\vskip2pt} 6 0 & 1 & 1 & 0 & \dfrac{1}{\sqrt{2}} & 1 \\ 7 \noalign{\vskip2pt} 8 1 & 0 & 1 & 0 & 1 & 0 \\ 9 0 & 1 & 0 & 1 & 0 & 1 \\ 10 \end{pmatrix} 11 \] </pre>
--	---

Package `setspace` To have all formulas with another vertical spacing, one can choose the package `setspace` and redefining some of the math macros, e.g.

```

1 \newcommand*\Array[2][1]{\setstretch{#1}\array{#2}}
2 \let\endArray\endarray

```

$a = b$ $a = b$ $a = b$ $a = b$ text $a = b$ text $a = b$	<pre> 1 \[2 \begin{Array}[2]{cc} 3 a =&b\\ 4 a =&b\\ 5 a =&b\\ 6 \end{Array} 7 \] 8 9 text \$\begin{Array}{cc} 10 a =&b\\ 11 a =&b\\ 12 a =&b\\ 13 \end{Array}\$ text </pre>
---	---

12 Styles

Mode	Inline	Displayed
default	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$
<code>\displaystyle</code>	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$
<code>\scriptstyle</code>	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$
<code>\scriptscriptstyle</code>	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$
<code>\textstyle</code>	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$	$f(t) = \frac{T}{2\pi} \int \frac{1}{\sin \frac{\omega}{t}} dt$

Table 8: Math styles

This depends on the environment in which they are used. An inline formula has a default math fontsize called `\textstyle`, which is smaller than the one for a display formula (see section 3), which is called `\displaystyle`. Beside this predefinition there are two other special fontstyles for math, `\scriptstyle` and `\scriptscriptstyle`. They are called “style” in difference to “size”, because they have a dynamic character, their real fontsize belongs to the environment in which they are used. A fraction for example is by default in `\scriptstyle` when it is in an inline formula like this $\frac{a}{b}$, which can be changed to $\frac{a}{b}$. This may be in some cases useful but it looks in general ugly because the line spacing is too big. These four styles are predefined and together in a logical relationship. It is no problem to use the other styles like `\large`, `\Large`, ... **outside** the math environment. For example a fraction written with `\Huge`: $\frac{a}{b}$ (`\Huge$\frac{a}{b}$`). This may cause some problems when you want to write a displayed formula in another fontsize, because it also affects the interline spacing of the preceding part of the paragraph. If you end the paragraph, you get problems with spacing and page breaking above the equations. So it is better to declare the font size and then restore the baselines:

$$\int_1^2 \frac{1}{x^2} dx = 0.5 \quad (37)$$

```

1 \makeatletter
2 \newenvironment{smallequation}[1]{%
3   \skip@=\baselineskip
4   #1%
5   \baselineskip=\skip@

```

```

6 \equation
7 }\endequation \ignorespacesafterend}
8 \makeatother
9
10 \begin{smallequation}{\tiny}
11 \int_1^2\,,\frac{1}{x^2}\,,dx=0.5
12 \end{smallequation}

```

If you use this the other way round for huge font sizes, don't forget to load package `exscale` (see section 58 on page 92). Also see this section for different symbol sizes.

13 Dots

In addition to the above decorations there are some more different dots which are single commands and not by default over/under a letter. It is not easy to see the differences between some of them. Dots from lower left to upper right are possible with `\reflectbox{\ddots}` . . .

<code>\cdots</code>	...	<code>\ddots</code>	⋮	<code>\dotsb</code>	...	<code>\dotsc</code>	...	<code>\dotsi</code>	...	<code>\cdots</code>
<code>\dotsm</code>	...	<code>\dotso</code>	...	<code>\ldots</code>	...	<code>\vdots</code>	:			<code>\dots</code>

Table 9: Dots in math mode

14 Accents

The letter “a” is only for demonstration. The table 10 shows all in standard L^AT_EX available accents and also the ones placed under a character. With package `amssymb` it is easy to define new accents. For more information see section 31 on page 58 or other possibilities at section 47 on page 84.

<code>\acute</code>	á	<code>\bar</code>	ā	<code>\breve</code>	ă
<code>\bar</code>	ā	<code>\breve</code>	ă		
<code>\check</code>	ǎ	<code>\ddot</code>	ä	<code>\ddot</code>	ä
<code>\dot</code>	ȁ	<code>\grave</code>	à	<code>\hat</code>	â
<code>\mathring</code>	ą	<code>\overbrace</code>	⏟ a	<code>\overleftarrow</code>	← a
<code>\overleftrightharpoon</code>	↔ a	<code>\overline</code>	ā	<code>\overrightarrow</code>	→ a
<code>\tilde</code>	ã	<code>\underbar</code>	⏟ a	<code>\underbrace</code>	⏟ a
<code>\underleftarrow</code>	← a	<code>\underleftrightharpoon</code>	↔ a	<code>\underline</code>	⏟ a
<code>\underrightarrow</code>	→ a	<code>\vec</code>	→ a	<code>\widehat</code>	⌢ a
<code>\widetilde</code>	⌢ a				

Table 10: Accents in math mode

The letters `i` and `j` can be substituted with the macros `\imath` and `\jmath` when an accents is placed over these letters and the dot should disappear: \vec{j} (`\vec{\imath}\ \ddot{\jmath}`).

Accents can be used in different ways, e.g. strike a single character with a horizontal line like `\mathaccent{-A$}`: $\mathaccent{-A$}$ or `\mathaccent\mathcode{-A$}`: $\mathaccent\mathcode{-A$}$. In section 53 on page 88 is a better solution for more than one character.

14.1 Over- and underbrackets

There are no `\underbracket` and `\overbracket` commands in the list of accents. They can be defined in the preamble with the following code.

```

1 \makeatletter
2 \def\underbracket{%
3   \ifnextchar [{\@underbracket}{\@underbracket [\@bracketheight]}%
4 }
5 \def\@underbracket[#1]{%
6   \ifnextchar [{\@under@bracket[#1]}{\@under@bracket[#1][0.4em]}%
7 }
8 \def\@under@bracket[#1][#2]#3{%\message{Underbracket: #1,#2,#3}
9   \mathop{\vtop{\m@th \ialign {##\crrc $\hfil \displaystyle {#3}\hfil $%
10    \crrc \noalign {\kern 3\p@ \nointerlineskip }\upbracketfill {#1}{#2}
11      \crrc \noalign {\kern 3\p@ }}}}\limits}
12 \def\upbracketfill#1#2{ $\m@th \setbox \z@ \hbox { $\braceld$}
13   \edef\@bracketheight{\the\ht\z@}\bracketend{#1}{#2}
14   \leaders \vrule \@height #1 \@depth \z@ \hfill
15   \leaders \vrule \@height #1 \@depth \z@ \hfill \
16   \bracketend{#1}{#2}$}
17 \def\bracketend#1#2{\vrule height #2 width #1\relax}
18 \makeatother

```

1. `\underbrace{...}` is an often used command:

$$\underbrace{x^2 + 2x + 1}_{(x+1)^2} = f(x) \quad (38)$$

2. Sometimes an `underbracket` is needed, which can be used in more ways than `\underbrace{...}`. An example for `\underbracket{...}`:

Hate Science $1 \rightarrow 2 \rightarrow 3 \rightarrow 4 \rightarrow 5 \rightarrow 6 \rightarrow 7 \rightarrow 8 \rightarrow 9 \rightarrow 10$ Love Science




low
medium
high

14.1.1 Use of `\underbracket{...}`

The `\underbracket{...}` command has two optional parameters:

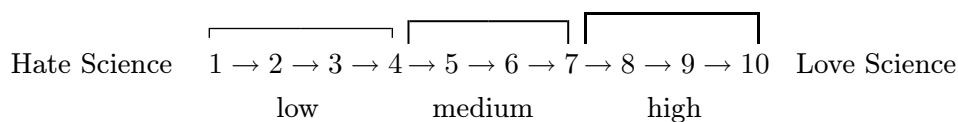
- the line thickness in any valid latex unit, e.g. `1pt`
- the height of the edge brackets, e.g. `1em`

using without any parameters gives the same values for thickness and height as predefined for the `\underbrace` command.

1.	<code>\underbrace{foo~bar}</code>	
2.	<code>\underbrace[2pt]{foo~bar}</code>	
3.	<code>\underbrace[2pt][1em]{foo~bar}</code>	

14.1.2 Overbracket




In addition to the underbracket an overbracket is also useful, which can be used in more ways than `\overbrace{...}`. For example:



The `\overbracket{...}` command has two optional parameters:

- the line thickness in any valid latex unit, e.g. `1pt`
- the height of the edge brackets, e.g. `1em`

using without any parameters gives the same values for thickness and height as predefined for the `\overbrace` command.

1.	<code>\overbracket {foo\ bar}</code>	
2.	<code>\overbracket[2pt] {foo\ bar}</code>	
3.	<code>\overbracket[2pt][1em] {foo\ bar}</code>	

14.2 Vectors

Especially for vectors there is the `esvect.sty`¹⁷ package, which looks better than the `\overrightarrow`, f.ex:

Look into the documentation for more details about `esvect.sty`.

¹⁷CTAN://macros/latex/contrib/esvect/

<code>\vv{...}</code>	<code>\overrightarrow{...}</code>
\vec{a}	\overrightarrow{a}
\vec{abc}	\overrightarrow{abc}
\vec{i}	\overrightarrow{i}
\vec{A}_x	\overrightarrow{A}_x

Table 11: Vectors with package `esvect.sty` (in the right column the default one from \LaTeX)

15 Exponents and indices

The two active characters `_` and `^` can only be used in math mode. The **following** character will be printed as an index (`$y=a_1x+a_0$`: $y = a_1x + a_0$) or as an exponent (`$x^2+y^2=r^2$`: $x^2 + y^2 = r^2$). For more than the next character put it inside of `{}`, like `$a_{i-1}+a_{i+1}<a_i$`: $a_{i-1} + a_{i+1} < a_i$.

Especially for multiple exponents there are several possibilities. For example:

$$((x^2)^3)^4 = ((x^2)^3)^4 = \left((x^2)^3\right)^4 \quad (39)$$

```

1 ((x^2)^3)^4 =
2 {\{ (x^2) ^3 \} ^4} =
3 {\left ( {\left (x^2 \right) ^3 \right) ^4}

```

For variables with both exponent and indices index the order is not important, `a_1^2` is exactly the same than `a^2_1`: $a_1^2 = a_1^2$

16 Operators

They are written in upright font shape and are placed with some additional space before and after for a better typesetting. With the `\mathcal` package it is possible to define one's own operators (see section 36 on page 64). Table 12 and 13 on the following page show a list of the predefined ones for standard \LaTeX .

<code>\coprod</code>	\coprod	<code>\bigvee</code>	\bigvee	<code>\bigwedge</code>	\bigwedge
<code>\biguplus</code>	\biguplus	<code>\bigcap</code>	\bigcap	<code>\bigcup</code>	\bigcup
<code>\intop</code>	\intop	<code>\int</code>	\int	<code>\prod</code>	\prod
<code>\sum</code>	\sum	<code>\bigotimes</code>	\bigotimes	<code>\bigoplus</code>	\bigoplus
<code>\bigodot</code>	\bigodot	<code>\oint</code>	\oint	<code>\oint</code>	\oint
<code>\bigsqcup</code>	\bigsqcup	<code>\smallint</code>	\smallint		

Table 12: The predefined operators of `fontmath.ltx`

The difference between `\intop` and `\int` is that the first one has by default over/under limits and the second subscript/superscript limits. Both

17 GREEK LETTERS

can be changed with the `\limits` or `\nolimits` command. The same behaviour happens to the `\ointop` and `\oint` Symbols.

<code>\log</code>	log	<code>\lg</code>	lg	<code>\ln</code>	ln
<code>\lim</code>	lim	<code>\limsup</code>	lim sup	<code>\liminf</code>	lim inf
<code>\sin</code>	sin	<code>\arcsin</code>	arcsin	<code>\sinh</code>	sinh
<code>\cos</code>	cos	<code>\arccos</code>	arccos	<code>\cosh</code>	cosh
<code>\tan</code>	tan	<code>\arctan</code>	arctan	<code>\tanh</code>	tanh
<code>\cot</code>	cot	<code>\coth</code>	coth	<code>\sec</code>	sec
<code>\csc</code>	csc	<code>\max</code>	max	<code>\min</code>	min
<code>\sup</code>	sup	<code>\inf</code>	inf	<code>\arg</code>	arg
<code>\ker</code>	ker	<code>\dim</code>	dim	<code>\hom</code>	hom
<code>\det</code>	det	<code>\exp</code>	exp	<code>\Pr</code>	Pr
<code>\gcd</code>	gcd	<code>\deg</code>	deg	<code>\bmod</code>	mod
<code>\pmod{a}</code>	(mod a)				

Table 13: The predefined operators of `latex.ltx`

For more predefined operator names see table 20 on page 86. It is easy to define a new operator with

```
1 \makeatletter
2 \newcommand\foo{\mathop{\operator@font foo}\nolimits}
3 \makeatother
```

Now you can use `\foo` in the usual way:

$$\text{foo}_1^2 = x^2$$

```
1 \[ \foo_1^2 = x^2 \]
```

In this example `\foo` is defined with `\nolimits`, means that limits are placed in superscript/subscript mode and not over under. This is still possible with `\limits` in the definition or the equation:

$$\text{foo}_1^2 = x^2$$

```
1 \[ \foo\limits_1^2 = x^2 \]
```

\mathcal{M} Smath has an own macro for a definition, have a look at section 36 on page 64.

17 Greek letters

The \mathcal{M} Smath package simulates a bold font for the greek letters, it writes a greek character twice with a small kerning. The `\mathbf{<character>}` doesn't work with lower greek character. See section 40 on page 69 for the `\pmb` macro, which makes it possible to print bold lower greek letters. Not all upper case letters have own macro names. If there is no difference to

17 GREEK LETTERS

the roman font, then the default letter is used, e.g.: A for the upper case of α . Table 14 shows only those upper case letters which have own macro names. Some of the lower case letters have an additional `var` option for an alternative.

lower	default	upper	default	<code>\mathbf</code>	<code>\mathit</code>
<code>\alpha</code>	α				
<code>\beta</code>	β				
<code>\gamma</code>	γ	<code>\Gamma</code>	Γ	$\mathbf{\Gamma}$	\varGamma
<code>\delta</code>	δ	<code>\Delta</code>	Δ	$\mathbf{\Delta}$	\varDelta
<code>\epsilon</code>	ϵ				
<code>\varepsilon</code>	ε				
<code>\zeta</code>	ζ				
<code>\eta</code>	η				
<code>\theta</code>	θ	<code>\Theta</code>	Θ	$\mathbf{\Theta}$	\varTheta
<code>\vartheta</code>	ϑ				
<code>\iota</code>	ι				
<code>\kappa</code>	κ				
<code>\lambda</code>	λ	<code>\Lambda</code>	Λ	$\mathbf{\Lambda}$	\varLambda
<code>\mu</code>	μ				
<code>\nu</code>	ν				
<code>\xi</code>	ξ	<code>\Xi</code>	Ξ	$\mathbf{\Xi}$	\varXi
<code>\pi</code>	π	<code>\Pi</code>	Π	$\mathbf{\Pi}$	\varPi
<code>\varpi</code>	ϖ				
<code>\rho</code>	ρ				
<code>\varrho</code>	ϱ				
<code>\sigma</code>	σ	<code>\Sigma</code>	Σ	$\mathbf{\Sigma}$	\varSigma
<code>\varsigma</code>	ς				
<code>\tau</code>	τ				
<code>\upsilon</code>	υ	<code>\Upsilon</code>	Υ	$\mathbf{\Upsilon}$	\varUpsilon
<code>\phi</code>	ϕ	<code>\Phi</code>	Φ	$\mathbf{\Phi}$	\varPhi
<code>\varphi</code>	φ				
<code>\chi</code>	χ				
<code>\psi</code>	ψ	<code>\Psi</code>	Ψ	$\mathbf{\Psi}$	\varPsi
<code>\omega</code>	ω	<code>\Omega</code>	Ω	$\mathbf{\Omega}$	\varOmega

Table 14: The greek letters

Bold greek letters are possible with the package `bm` (see section 51 on page 87) and if they should also be upright with the package `upgreek`:

`\bm{\upalpha}`, `\bm{\upbeta}` ... α, β ...

18 Pagebreaks

By default a displayed formula cannot have a pagebreak. This makes some sense, but sometimes it gives a better typesetting when a pagebreak is possible.

`\allowdisplaybreaks`

`\allowdisplaybreaks`

This macro enables \TeX to insert pagebreaks into displayed formulas whenever a newline command appears. With the command `\displaybreak` it is also possible to insert a pagebreak at any place.

19 `\stackrel`

`\stackrel` puts a character on top of another one which may be important if a used symbol is not predefined. For example “ $\stackrel{\wedge}{=}$ ” (`\stackrel{\wedge}{=}`). The syntax is

```
1 \stackrel{top}{base}
```

Such symbols may be often needed so that a macro definition in the preamble makes some sense:

```
1 \newcommand{\eqdef}{%
2   \ensuremath{%
3     \stackrel{\mathrm{def}}{=}%
4   }%
5 }
```

With the `\ensuremath` command we can use the new `\eqdef` command in text and in math mode, \LaTeX switches automatically in math mode, which saves some keystrokes like the following command, which is written without the delimiters (\dots) for the math mode $\stackrel{\text{def}}{=}$, only `\eqdef` with a space at the end. In math mode together with another material it may look like $\vec{x} \stackrel{\text{def}}{=} (x_1, \dots, x_n)$ and as command sequence

```
1 $\vec{x}\eqdef\left(x_{1},\ldots,x_{n}\right)$
```

The fontsize of the top is one size smaller than the one from the base, but it is no problem to get both the same size, just increase the top or decrease the base.

20 `\choose`

`\choose` is like `\atop` with delimiters or like `\frac` without the fraction line and also with delimiters. It is often used for binoms and has the following syntax:

```
1 {above \choose below}
```

The two braces are not really important but it is safe to use them.

$$\binom{m+1}{n} = \binom{m}{n} + \binom{m}{k-1} \quad (40)$$

```
1 {\m+1 \choose n}={\m \choose n}+{\m \choose k-1}\label{eq:
  choose}
```

See section 29.2 on page 57 for the $\mathcal{A}\mathcal{M}\mathcal{S}$ math equivalents and enhancements.

21 Color in math expressions

There is no difference in using colored text and colored math expressions. With

```
\usepackage{color}
```

in the preamble the macro `\textcolor{<color>}{<text or math>}` exists.

$$\textcolor{blue}{f}(x) = \int_1^{\infty} \frac{\textcolor{red}{1}}{\textcolor{red}{x}^2} dx = 1 \quad (41)$$

```
1 \begin{equation}
2 \textcolor{blue}{f}(x) = \int\limits_1^{\infty} \textcolor{red}{
  \frac{1}{x^2}} \, dx=1
3 \end{equation}
```

If all math expressions should be printed in the same color, then it is better to use the `everydisplay` macro (section 24 on page 41).

22 Boldmath

Writing a whole formula in bold is possible with the command sequence `\boldmath ... \unboldmath`, which itself must be written in textmode (outside the formula) or with the command `\mathversion{bold} ...`.

```
\mathversion
\boldmath
\unboldmath
```

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \qquad \sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} \mathbf{a}_{ij} \mathbf{b}_{jk} \mathbf{c}_{ki}$$

```
1 \boldmath
2 \[
3 \sum_{\textcolor{red}{%
4 \makebox[0pt]{\textcolor{red}{%
```

```

5  {\scriptscriptstyle 1\le j\le p\atop {\%
6  {1\le j\le q\atop 1\le k\le r}}}%
7  $}%
8  }a_{ij}b_{jk}c_{ki}
9  \]
10 \unboldmath

```

The `\mathversion` macro defines a math style which is valid for all following math expressions. If you want to have all math in bold then use this macro instead of `\boldmath`. But it is no problem to put `\mathversion` inside a group to hold the changes locally.

$$y(x) = ax^3 + bx^2 + cx + d \quad (42)$$

```

1  {\mathversion{bold}%
2  \begin{equation}
3  y(x) = ax^3+bx^2+cx+d
4  \end{equation}}

```

Single characters inside a formula can be written in bold with `mathbf`, but only in upright mode, which is in general not useful as shown in equation 43. It is better to use package `bm.sty` (see section 51 on page 87).

$$\sum_{\substack{1 \leq j \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} \mathbf{b}_{jk} c_{ki} \quad (43)$$

22.1 Bold math expressions as part of titles and items

By default the titles in sections, subsections, a.s.o. are printed in bold. Same for the `description` environment. The problem is that a math expression in one of these environments is printed in default font shape, like the following example for a `section` and `description` environment:

22 Function $f(x) = x^2$

This is $y = f(x)$ Only a demonstration.

And $z = f(x, y)$ Another demonstration.

With a redefinition of the `section` and `item` macros it is possible to get everything in bold font.

22 Function $f(x) = x^2$

This is $y = f(x)$ Only a demonstration.

And $z = f(x, y)$ Another demonstration.

```

1 \let\itemOld\item
2 \makeatletter
3 \renewcommand\item[1][]{%
4   \def\@tempa{#1}
5   \ifx\@tempa\@empty\itemOld\else\boldmath\itemOld[#1]\
6     unboldmath\fi%
7 }
8 \makeatother
9 \let\sectionOld\section
10 \renewcommand\section[2][\empty]{%
11   \boldmath\sectionOld[#1]{#2}\unboldmath%
12 }

```

23 Multiplying numbers

When the dot is used as the decimal marker as in the United States, the preferred sign for the multiplication of numbers or values of quantities is a cross ($\backslash\times \times$), not a half-high and centered dot ($\backslash\cdot \cdot$).

When the comma is used as the decimal marker as in Europe, the preferred sign for the multiplication of numbers is the half-high dot. The multiplication of quantity symbols (or numbers in parentheses or values of quantities in parentheses) may be indicated in one of the following ways: ab , $a \cdot b$, $a \times b$.

For more information see “Nist Guide to SI Units -More on Printing and Using Symbols and Numbers in Scientific and Technical Documents”¹⁸ or the German DIN 1304, Teil 1.

24 Other macros

There are some other macros which are not mentioned in the foregoing text. Here comes a not really complete list of these macros.

$\backslash\text{everymath}$
 $\backslash\text{everydisplay}$
 $\backslash\text{underline}$

$\backslash\text{everymath}$ puts the argument before any inlined math expression, e.g. $\backslash\text{everymath}\{\text{small}\}$.

$\backslash\text{everydisplay}$ puts the argument before any displayed math expression, e.g. $\backslash\text{everydisplay}\{\text{color}\{\text{blue}\}\}$.

$\backslash\text{underline}$ underlines a math expression and has to be used inside the math mode.

$$\underline{F(x) = \int f(x) dx}$$

¹⁸<http://physics.nist.gov/Pubs/SP811/sec10.html>

Part II

$\mathcal{A}\mathcal{M}\mathcal{S}$ math package

In general the $\mathcal{A}\mathcal{M}\mathcal{S}$ packages are at least a collection of three different ones:

1. `amsmath.sty`
2. `amssymb.sty`
3. `amsfonts.sty`

In the following only the first one is described in detail.

The $\mathcal{A}\mathcal{M}\mathcal{S}$ math has the following options:

centertags	(default) For a split equation, place equation numbers vertically centered on the total height of the equation.
tbtags	‘Top-or-bottom tags’ For a split equation, place equation numbers level with the last (resp. first) line, if numbers are on the right (resp. left).
sumlimits	(default) Place the subscripts and superscripts of summation symbols above and below, in displayed equations. This option also affects other symbols of the same type – \prod , \coprod , \otimes , \oplus , and so forth – but excluding integrals (see below).
nosumlimits	Always place the subscripts and superscripts of summation-type symbols to the side, even in displayed equations.
intlimits	Like <code>sumlimits</code> , but for integral symbols.
nointlimits	(default) Opposite of <code>intlimits</code> .
namelimits	(default) Like <code>sumlimits</code> , but for certain ‘operator names’ such as <code>det</code> , <code>inf</code> , <code>lim</code> , <code>max</code> , <code>min</code> , that traditionally have subscripts placed underneath when they occur in a displayed equation.
nonamelimits	Opposite of <code>namelimits</code> .

To use one of these package options, put the option name in the optional argument, e.g., `\usepackage[intlimits]{amsmath}`. The $\mathcal{A}\mathcal{M}\mathcal{S}$ math also recognises the following options which are normally selected (implicitly or explicitly) through the `documentclass` command, and thus need not be repeated in the option list of the `\usepackage{amsmath}` statement.

leqno	Place equation numbers on the left.
reqno	(default) Place equation numbers on the right.
fleqn	Position equations at a fixed indent from the left margin rather than centered in the text column. $\mathcal{A}\mathcal{M}\mathcal{S}$ math defines the length <code>\mathindent</code> and uses it when the equations have only one tabbing character (<code>&</code>).

All math environments are displayed ones, so there is no special inline math.

25 align environments

There are four different align environments, described in the following subsections. Their behaviour is shown in table 15. The code for all align environments was:

```
1 \begin{<name>}
2   <name> &= x & x &= x \\
3   <name> &= x & x &= x
4 \end{<name>}
```

align	=	x		x	=	x		x
align	=	x		x	=	x		x

alignat	=	x		x	=	x
alignat	=	x		x	=	x

flalign	=	x		x	=	x
flalign	=	x		x	=	x

xalignat	=	x		x	=	x
xalignat	=	x		x	=	x

xxalignat	=	x		x	=	x
xxalignat	=	x		x	=	x

Table 15: Comparison between the different align environments with the same code, where the first three can have an equation number

In difference to the `eqnarray` environment from standard \LaTeX (section 3.2), the “three” parts of one equation `expr.-symbol-expr.` are divided

by only one ampersand in two parts. In general the ampersand should be before the symbol to get the right spacing, e.g. $y \&= x$. Compare the following three equations, the second one has a wrong spacing.

$$\left| \begin{array}{l} y = x \\ y = x \\ y = x \end{array} \right| \quad \begin{array}{l} (44) \\ (45) \\ (46) \end{array}$$

```
1 y \&= x
2 y =\& x
3 y ={\&} x
```

25.1 The default `align` environment

The `eqnarray` environment has a not so good spacing between the cells. Writing the equations no. 3 to 6 with the `align` environment gives:

$$y = d \quad (47)$$

$$y = cx + d \quad (48)$$

$$y_{12} = bx^2 + cx + d \quad (49)$$

$$y(x) = ax^3 + bx^2 + cx + d \quad (50)$$

The code looks like:

```
1 \begin{align}
2 y \&= d \label{eq:IntoSection} \\
3 y \&= cx+d \\
4 y_{12} \&= bx^2+cx+d \\
5 y(x) \&= ax^3+bx^2+cx+d \\
6 \end{align}
```

- The `align` environment has an implicit `{r l r l ...}` horizontal alignment with a vertical column-alignment, e.g.:

$$\begin{array}{rcl} 12 & & 3 \end{array}$$

```
1 \begin{align*}
2 1 \& 2 \& 3 \\
3 \end{align*}
```

- A nonnumber-version `\begin{align*}...\end{align*}` exists.
- Unnumbered single rows are possible with `\nonumber`.
- The `align` environment takes the whole horizontal space if you have more than two columns:

$$y = d \quad z = 1 \quad (51)$$

$$y = cx + d \quad z = x + 1 \quad (52)$$

$$\begin{array}{l} y_{12} = bx^2 + cx + d \\ y(x) = ax^3 + bx^2 + cx + d \end{array} \quad \begin{array}{l} z = x^2 + x + 1 \\ z = x^3 + x^2 + x + 1 \end{array} \quad (53)$$

The code for this example looks like

```

1 \begin{align}
2 y &= d & z &= 1 \\
3 y &= cx + d & z &= x + 1 \\
4 y_{12} &= bx^2 + cx + d & z &= x^2 + x + 1 \nonumber \\
5 y(x) &= ax^3 + bx^2 + cx + d & z &= x^3 + x^2 + x + 1 \\
6 \end{align}

```

25.2 alignat environment

```

\begin{align}
...
\end{align}

```

>From now the counting of the equation changes. It is introduced with a foregoing command, which doesn't really make sense, it is only for demonstration:

```
\renewcommand{\theequation}{\thepart-\arabic{equation}}.
```

This means “align at several places” and is something like more than two align environment side by side. Parameter is the number of the align environments, which is not important for the user. The above last align example looks like:

$$y = d \qquad z = 1 \qquad \text{(II-54)}$$

$$y = cx + d \qquad z = x + 1 \qquad \text{(II-55)}$$

$$y_{12} = bx^2 + cx + d \qquad z = x^2 + x + 1$$

$$y(x) = ax^3 + bx^2 + cx + d \quad z = x^3 + x^2 + x + 1 \qquad \text{(II-56)}$$

The parameter was 2 and it is 3 for the following example:

$$i_{11} = 0.25 \qquad i_{12} = i_{21} \qquad i_{13} = i_{23}$$

$$i_{21} = \frac{1}{3}i_{11} \qquad i_{22} = 0.5i_{12} \qquad i_{23} = i_{31} \qquad \text{(II-57)}$$

$$i_{31} = 0.33i_{22} \quad i_{32} = 0.15i_{32} \quad i_{33} = i_{11} \qquad \text{(II-58)}$$

For this example the code is:

```

1 \begin{alignat}{3}
2 i_{11} &= 0.25 & i_{12} &= i_{21} & i_{13} &= i_{23} \nonumber \\
3 i_{21} &= \frac{1}{3}i_{11} & i_{22} &= 0.5i_{12} & i_{23} &= i_{31} \\
4 i_{31} &= 0.33i_{22} \quad i_{32} &= 0.15i_{32} \quad i_{33} &= i_{11} \\
5 \end{alignat}

```

With the alignat environment one can easily align equations vertically at more than one marker:

$$abc = xxx \qquad \qquad \qquad = xxxxxxxxxxxx = aaaaaaaaaa \qquad \text{(II-59)}$$

$$ab = yyyyyyyyyyyyyyy = yyyy \qquad \qquad \qquad = ab \qquad \text{(II-60)}$$

```

1 \begin{alignat}{3}
2   abc &= xxx && &&= xxxxxxxxxxxx &&= aaaaaaaaaa \\
3   ab  &= yyyyyyyyyyyyyyy &&= yyyy && &&= ab \\
4 \end{alignat}
```

- The `alignat` environment has an implicit `{r...r}` horizontal alignment with a vertical column alignment.
- A nonnumber-version `\begin{alignat*}...\end{alignat*}` exists.
- Unnumbered single rows are possible with `\nonumber`.

25.3 flalign environment

This is the new replacement for the `xalignat` and `xxalignat` environments. It is nearly the same as the `xalignat` environment, only more “out spaced” and “left aligned”.

```

\begin{flalign}
...
\end{flalign}
```

$$i_{11} = 0.25$$

$$i_{21} = \frac{1}{3}i_{11} \qquad \text{(II-61)}$$

$$i_{31} = 0.33i_{22} \qquad \text{(II-62)}$$

```

1 \begin{flalign}
2 i_{11} &= 0.25 \nonumber \\
3 i_{21} &= \frac{1}{3}i_{11} \\
4 i_{31} &= 0.33i_{22} \\
5 \end{flalign}
```

As seen, the equations are not really left aligned, when they have only one ampersand. In this case `flalign` has the same behaviour as the `align` environment.

When there are more than one tabbing characters (`&`), then the equations are really left aligned. This is also an easy way to get an equation with only one ampersand left aligned, see equation II-66 below.

$$\begin{array}{lll}
 i_{11} = 0.25 & i_{12} = i_{21} & i_{13} = i_{23} \\
 i_{21} = \frac{1}{3}i_{11} & i_{22} = 0.5i_{12} & i_{23} = i_{31} \quad \text{(II-63)} \\
 i_{31} = 0.33i_{22} & i_{32} = 0.15i_{32} & i_{33} = i_{11} \quad \text{(II-64)}
 \end{array}$$

The code looks like:

```

1 \begin{flalign}
2 i_{11} &= 0.25 & i_{12} &= i_{21} & i_{13} &= i_{23} \nonumber \\
3 i_{21} &= \frac{1}{3}i_{11} & i_{22} &= 0.5i_{12} & i_{23} &= i_{31} \\
4 i_{31} &= 0.33i_{22} & i_{32} &= 0.15i_{32} & i_{33} &= i_{11} \\
5 \end{flalign}
```

This environment can be used to mix centered and left aligned equations without using the document wide valid option `fleqn`.

$$f(x) = \int \frac{1}{x^2} dx \quad (\text{II-65})$$

$$f(x) = \int \frac{1}{x^2} dx \quad (\text{II-66})$$

Equation II-66 is left aligned in fact of the second tabbing character `&`.

```
1 \begin{align}\label{eq:centered}
2 f(x) &= \int \frac{1}{x^2} \, dx
3 \end{align}
4
5 \begin{flalign}\label{eq:leftaligned}
6 f(x) &= \int \frac{1}{x^2} \, dx &
7 \end{flalign}
```

Another case is placing text left aligned, whereas the formulas should be right aligned.

$$12(x-1) + 20(y-3) + 14(z-2) = 0$$

same as

$$6x + 10y + 7z = 0$$

```
1 \begin{flalign*}
2 && 12(x-1)+20(y-3)+14(z-2) &= 0\\
3 \text{same as } && 6x+10y+7z &= 0
4 \end{flalign*}
```

25.4 xalignat environment

This is an obsolete macro but still supported by the $\mathcal{A}\mathcal{M}\mathcal{S}$ math package. Same as `alignat` environment, only a little more “out spaced”.

```
\begin{xalignat}
...
\end{xalignat}
```

$$\begin{array}{lll} i_{11} = 0.25 & i_{12} = i_{21} & i_{13} = i_{23} \\ i_{21} = \frac{1}{3}i_{11} & i_{22} = 0.5i_{12} & i_{23} = i_{31} \end{array} \quad (\text{II-67})$$

$$\begin{array}{lll} i_{31} = 0.33i_{22} & i_{32} = 0.15i_{32} & i_{33} = i_{11} \end{array} \quad (\text{II-68})$$

The same code looks like:

```
1 \begin{xalignat}{3}
2 i_{11} &= 0.25 & i_{12} &= i_{21} & i_{13} &= i_{23} \nonumber \\
3 i_{21} &= \frac{1}{3}i_{11} & i_{22} &= 0.5i_{12} & i_{23} &= i_{31} \\
4 i_{31} &= 0.33i_{22} \quad & i_{32} &= 0.15i_{32} \quad & i_{33} &= i_{11} \\
5 \end{xalignat}
```

25.5 `xxalignat` environment

Like `xalignat` an obsolete macro but still supported by the $\mathcal{A}\mathcal{M}\mathcal{S}$ math package. Same as `align` environment, only extremely “out spaced”, therefore no equation number!

```
\begin{xxalignat}
...
\end{xxalignat}
```

$$\begin{array}{lll}
 i_{11} = 0.25 & i_{12} = i_{21} & i_{13} = i_{23} \\
 i_{21} = \frac{1}{3}i_{11} & i_{22} = 0.5i_{12} & i_{23} = i_{31} \\
 i_{31} = 0.33i_{22} & i_{32} = 0.15i_{32} & i_{33} = i_{11}
 \end{array}$$

The same code looks like:

```

1 \begin{xxalignat}{3}
2   i_{11} & = 0.25 & i_{12} & = i_{21} & i_{13} & = i_{23} \nonumber \\
3   i_{21} & = \frac{1}{3}i_{11} & i_{22} & = 0.5i_{12} & i_{23} & = i_{31} \\
4   i_{31} & = 0.33i_{22} & i_{32} & = 0.15i_{32} & i_{33} & = i_{11} \\
5 \end{xxalignat}
```

25.6 `aligned` environment

In difference to the `split` environment (section 26.3 on page 51), the `aligned` environment allows more than one horizontal alignment but has also only one equation number:

```
\begin{aligned}
...
\end{aligned}
```

$$\begin{array}{lcl}
 2x + 3 = 7 & 2x + 3 - 3 = 7 - 3 & \\
 2x = 4 & \frac{2x}{2} = \frac{4}{2} & \text{(II-69)} \\
 x = 2 & &
 \end{array}$$

```

1 \begin{equation}
2 \begin{aligned}
3   2x+3 & = 7 & & 2x+3-3 & = 7-3 & \\
4   2x & = 4 & & \frac{2x}{2} & = \frac{4}{2} & \\
5   x & = 2 & & & & \\
6 \end{aligned}
7 \end{equation}
```

The `aligned` environment is similar to the `array` environment, there exists no starred version and it has only one equation number and has to be part of another math environment, which should be `equation` environment. The advantage of `aligned` is the much better horizontal and vertical spacing.

25.7 Problems

When using one of the `align` environments, there should be no `\\` at the end of the last line, otherwise you’ll get another equation number for this “empty” line:

$$2x + 3 = 7$$

(II-70)

(II-71)

```

1 \begin{align}
2   2x+3 &= 7\\
3 \end{align}

```

$$2x + 3 = 7$$

(II-72)

```

1 \begin{align}
2   2x+3 &= 7
3 \end{align}

```

26 Other environments

26.1 gather environment

This is like a multi line environment with no special horizontal alignment. All rows are centered and can have an own equation number:

```

\begin{gather}
...
\end{gather}

```

$$i_{11} = 0.25 \quad (\text{II-73})$$

$$i_{21} = \frac{1}{3}i_{11}$$

$$i_{31} = 0.33i_{22} \quad (\text{II-74})$$

For this example the code looks like:

```

1 \begin{gather}
2   i_{11} = 0.25\\
3   i_{21} = \frac{1}{3}i_{11}\nonumber\\
4   i_{31} = 0.33i_{22}
5 \end{gather}

```

- The `gather` environment has an implicit `{c}` horizontal alignment with no vertical column alignment. It is just like an one column array/table.
- A `nonumber`-version `\begin{gather*}...\end{gather*}` exists. Look at section 26.3 on page 51 for an example.

26.2 multline environment

This is also like a multi line¹⁹ environment with a special vertical alignment. The **first** row is **left aligned**, the second and all following ones except the last one are **centered** and the **last** line is **right aligned**. It is often used to write extremely long formulas:

```

\begin{multline}
...
\end{multline}

```

```

1 \begin{multline}
2   A = \lim_{n \rightarrow \infty} \Delta x \left( a^2 + \left( a^2 + 2a \Delta x \right. \right.
3       + \left. \left. \Delta x \right)^2 \right) \right)
4   + \left( a^2 + 2 \Delta x \cdot 2a \Delta x + \left( \Delta x \right)^2 \right)
5   + \left( a^2 + 2 \Delta x \cdot 3a \Delta x + \left( \Delta x \right)^2 \right)

```

¹⁹It is no typo, the name of the environment is `multline`, no missing `i` here!

```

6 + \ldots\\
7 \left.+ \left( a^{\{2\}}+2\cdot (n-1)a\Delta x +(n-1)^{\{2\}}\left( \Delta x\right) \right. \right. \\
8 \quad \left. \left. ^{\{2\}}\right) \right) \\
9 = \frac{1}{3}\left( b^{\{3\}}-a^{\{3\}}\right) \\
\end{multline}

```

$$\begin{aligned}
 A = \lim_{n \rightarrow \infty} \Delta x & \left(a^2 + \left(a^2 + 2a\Delta x + (\Delta x)^2 \right) \right. \\
 & + \left(a^2 + 2 \cdot 2a\Delta x + 2^2 (\Delta x)^2 \right) \\
 & + \left(a^2 + 2 \cdot 3a\Delta x + 3^2 (\Delta x)^2 \right) \\
 & + \dots \\
 & \left. + \left(a^2 + 2 \cdot (n-1)a\Delta x + (n-1)^2 (\Delta x)^2 \right) \right) \\
 & = \frac{1}{3} (b^3 - a^3) \quad (\text{II-75})
 \end{aligned}$$

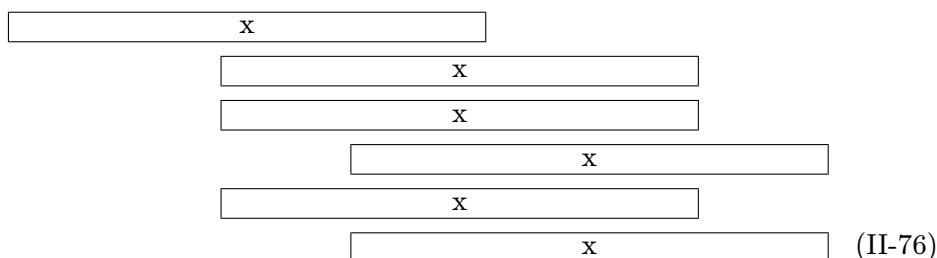


Figure 1: `multline` Alignment demo (the fourth row is shifted to the right with `\shoveright`)

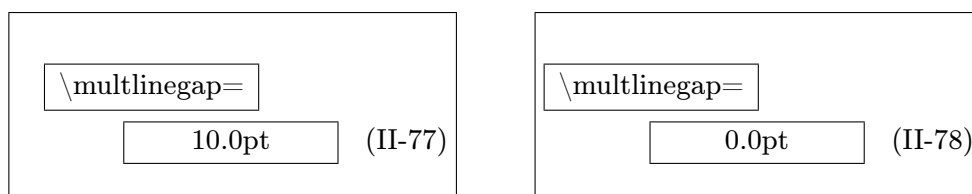


Figure 2: Demonstration of `\multlinegap` (default is 0pt)

- A nonnumber-version `\begin{multline*}...\end{multline*}` exists.
- By default only the last line (for right equation numbers) or the first line (for left equation numbers) gets a number, the others can't.

- The alignment of a single line can be changed with the command `\shoveright` (figure 1 on the preceding page)
- The first line and the last line have a small gap to the text border.²⁰ See figure 2, where the length of `\multlinegap` is set to 0pt for the right one.

26.3 *split* environment

```
\begin{split}
...
\end{split}
```

>From now on the counting of the equations changes. It is introduced with a foregoing command, which doesn't really make sense, it is only for demonstration:

```
1 \makeatletter
2 \@removefromreset{equation}{section}
3 \makeatother
```

The `split` environment is like the `multline` or `array` environment for equations longer than the column width. Just like the `array` environment and in contrast to `multline`, `split` can only be used as **part of another environment**. `split` itself has no own numbering, this is given by the other environment. Without an ampersand all lines in the `split` environment are right-aligned and can be aligned at a special point by using an ampersand. In difference to the `aligned` environment (section 25.6 on page 48), the `split` environment permits more than one horizontal alignment.

It is important that the `split` environment has another behaviour when used inside one of the “old” \LaTeX environments `\[...]` or `\begin{equation} ... \end{equation}`, in this case more than one horizontal alignment tabs are possible.

```
\[
\begin{split}
\framebox[0.35\columnwidth]{x}\\
\framebox[0.75\columnwidth]{x}\\
\framebox[0.65\columnwidth]{x}\\
\framebox[0.95\columnwidth]{x}
\end{split}
\]
```

```
\[
\begin{split}
\vec{a} = {}&\framebox[0.35\columnwidth]{x}\\
&\framebox[0.75\columnwidth]{x}\\
&\framebox[0.65\columnwidth]{x}\\
&\framebox[0.95\columnwidth]{x}
\end{split}
\]
```

²⁰When the first (numbers left) or last line (numbers right) has an equation number then `\multlinegap` is not used for these ones, only for the line without a number.

The following example shows the `split` environment as part of the `equation` environment:

$$\begin{aligned}
 A_1 &= \left| \int_0^1 (f(x) - g(x)) dx \right| + \left| \int_1^2 (g(x) - h(x)) dx \right| \\
 &= \left| \int_0^1 (x^2 - 3x) dx \right| + \left| \int_1^2 (x^2 - 5x + 6) dx \right| \\
 &= \left| \frac{x^3}{3} - \frac{3}{2}x^2 \right|_0^1 + \left| \frac{x^3}{3} - \frac{5}{2}x^2 + 6x \right|_1^2 \\
 &= \left| \frac{1}{3} - \frac{3}{2} \right| + \left| \frac{8}{3} - \frac{20}{2} + 12 - \left(\frac{1}{3} - \frac{5}{2} + 6 \right) \right| \\
 &= \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| = \frac{7}{6} + \frac{5}{6} = 2 \text{ FE}
 \end{aligned} \tag{II-79}$$

```

1 \begin{equation}
2   \begin{split}
3     A_{1} &= \left| \int_{0}^{1} (f(x) - g(x)) dx \right| + \left| \int_{1}^{2} (g(x) - h(x)) dx \right| \\
4     &= \left| \int_{0}^{1} (x^2 - 3x) dx \right| + \left| \int_{1}^{2} (x^2 - 5x + 6) dx \right| \\
5     &= \left| \frac{x^3}{3} - \frac{3}{2}x^2 \right|_0^1 + \left| \frac{x^3}{3} - \frac{5}{2}x^2 + 6x \right|_1^2 \\
6     &= \left| \frac{1}{3} - \frac{3}{2} \right| + \left| \frac{8}{3} - \frac{20}{2} + 12 - \left( \frac{1}{3} - \frac{5}{2} + 6 \right) \right| \\
7     &= \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| = \frac{7}{6} + \frac{5}{6} = 2 \text{ FE} \\
8   \end{split}
9 \end{equation}

```

The same using the `array` environment with `{r1}`-alignment instead of `split` gives same horizontal alignment, but another vertical spacing²¹ and the symbols are only in scriptsize and not textsize:²²

$$\begin{aligned}
 A_1 &= \left| \int_0^1 (f(x) - g(x)) dx \right| + \left| \int_1^2 (g(x) - h(x)) dx \right| \\
 &= \left| \int_0^1 (x^2 - 3x) dx \right| + \left| \int_1^2 (x^2 - 5x + 6) dx \right| \\
 &= \left| \frac{x^3}{3} - \frac{3}{2}x^2 \right|_0^1 + \left| \frac{x^3}{3} - \frac{5}{2}x^2 + 6x \right|_1^2 \\
 &= \left| \frac{1}{3} - \frac{3}{2} \right| + \left| \frac{8}{3} - \frac{20}{2} + 12 - \left(\frac{1}{3} - \frac{5}{2} + 6 \right) \right| \\
 &= \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| = \frac{7}{6} + \frac{5}{6} = 2 \text{ FE}
 \end{aligned} \tag{II-80}$$

- There exists no starred version (`\begin{split*}`) of the `split` environment.

²¹Can be changed with `\renewcommand\arraystretch{1.5}`

²²See section 12 on page 31

26.4 Specials for multiline and split environments

With the multiline environment the equation 28 on page 21 looks like:

$$\frac{1}{2}\Delta(f_{ij}f^{ij}) = 2 \left(\sum_{i<j} \chi_{ij}(\sigma_i - \sigma_j)^2 + f^{ij}\nabla_j\nabla_i(\Delta f) + \right. \\ \left. + \nabla_k f_{ij}\nabla^k f^{ij} + f^{ij}f^k [2\nabla_i R_{jk} - \nabla_k R_{ij}] \right) \quad (\text{II-81})$$

which is again a bad typesetting because of the two unequal parentheses. Each one has a size which is correct for the line but not for the whole formula. L^AT_EX accepts only pairs of parentheses for one line and has an “empty” parentheses, the dot “\left.” or “\right.” to get only one of the “pair”. There are different solutions to get the right size of the parentheses. One of them is to use the \vphantom command, which reserves the vertical space without any horizontal one, like a vertical rule without any thickness. The sum symbol from the first line is the biggest one and responsible for the height, so this one is the argument of \vphantom which has to be placed anywhere.

$$\frac{1}{2}\Delta(f_{ij}f^{ij}) = 2 \left(\sum_{i<j} \chi_{ij}(\sigma_i - \sigma_j)^2 + f^{ij}\nabla_j\nabla_i(\Delta f) + \right. \\ \left. + \nabla_k f_{ij}\nabla^k f^{ij} + f^{ij}f^k [2\nabla_i R_{jk} - \nabla_k R_{ij}] \right) \quad (\text{II-82})$$

```

1 \begin{multiline}
2 \frac{1}{2}\Delta(f_{ij}f^{ij})=
3 2\left(\sum_{i<j}\chi_{ij}(\sigma_{ij})^2+f^{ij}\nabla_j\nabla_i(\Delta f)+\right.
4 \left.+ \nabla_k f_{ij}\nabla^k f^{ij}+f^{ij}f^k[2\nabla_i R_{jk}-\nabla_k R_{ij}]\right)
5 \end{multiline}

```

Instead of using the \vphantom command it is also possible to use fixed-width parentheses, which is described in section 8 on page 19.

26.5 cases environment

This gives support for an often used mathematical construct. You can also choose the more than once described way to convert some text into math, like

```

$x=\begin{cases}
0 & \text{\text{if A=...}}\\
1 & \text{\text{if B=...}}\\
x & \text{\text{this runs with as much text as you like,}} \\
& \text{\text{but without an automatic linebreak, it runs out}} \\
& \text{\text{of page....}}
\end{cases}%%$ \quad %% ----- Martin -----(wegen EMacs Syntaxhighlighting)

```

which gives equation II-83. It is obvious what the problem is.

$$x = \begin{cases} 0 & \text{if A=...} \\ 1 & \text{if B=...} \\ x & \text{this runs with as much text as you like, but without a linebreak, it runs out of page....} \end{cases} \quad (\text{II-83})$$

In this case it is better to use a parbox for the text part with a `flushleft` command for a better view.

$$x = \begin{cases} 0 & \text{if A=...} \\ 1 & \text{if B=...} \\ x & \begin{array}{l} \text{this runs with as much text} \\ \text{as you like, but without an} \\ \text{automatic linebreak, it runs} \\ \text{out of page....} \end{array} \end{cases} \quad (\text{II-84})$$

```

1 \begin{equation}
2 x=\begin{cases}
3 0 & \text{\text{if A=...}}\\
4 1 & \text{\text{if B=...}}\\
5 x & \text{\parbox{5cm}{\text{\flushleft} \\
6 \text{\text{this runs with as much text as you like,}} \\
7 \text{\text{but without an automatic linebreak,}} \\
8 \text{\text{it runs out of page....}}\text{\text{}}} \\
9 \end{cases}
10 \end{equation}
11

```

>From now on the counting of the equations changes. It is introduced with a foregoing command, which doesn't really make sense, it is only for demonstration:

```

1 \renewcommand\theequation{\arabic{equation}}

```

26.6 Matrix environments

All matrix environments can be nested and an element may also contain any other math environment, so that very complex structures are possible.

$\backslash\mathrm{Vmatrix}$	$\left\ \begin{smallmatrix} a & b \\ c & d \end{smallmatrix} \right\ $	$\backslash\mathrm{Bmatrix}$	$\left\{ \begin{smallmatrix} a & b \\ c & d \end{smallmatrix} \right\}$	$\backslash\mathrm{matrix}$	$\begin{smallmatrix} a & b \\ c & d \end{smallmatrix}$
$\backslash\mathrm{vmatrix}$	$\left \begin{smallmatrix} a & b \\ c & d \end{smallmatrix} \right $	$\backslash\mathrm{bmatrix}$	$\left[\begin{smallmatrix} a & b \\ c & d \end{smallmatrix} \right]$	$\backslash\mathrm{pmatrix}$	$\left(\begin{smallmatrix} a & b \\ c & d \end{smallmatrix} \right)$
				$\backslash\mathrm{smallmatrix}$	$\begin{smallmatrix} a & b \\ c & d \end{smallmatrix}$

Table 16: Matrix environments

By default all cells have a centered alignment, which is often not the best when having different decimal numbers or plus/minus values. Changing the alignment to right (not for the `smallmatrix`) is possible with

```

1 \makeatletter
2 \def\env@matrix{\hskip -\arraycolsep
3   \let\@ifnextchar\new@ifnextchar
4   \array{*\c@MaxMatrixCols r}}
5 \makeatother

```

`matrix`
`vmatrix`
`Vmatrix`
`bmatrix`
`Bmatrix`
`pmatrix`
`smallmatrix`

The special matrix environment `smallmatrix`, which decreases horizontal and vertical space is typeset in scriptstyle. The `smallmatrix` environment makes some sense in the inline mode to decrease the line height. For dots over several columns look for `\hdotsfor` in the following section.

27 Vertical whitespace

See section 11.5 on page 28 for the lengths which control the vertical whitespace. There is no difference to \mathcal{MSmath} .

28 Dots

In addition to section 13 on page 32 \mathcal{MSmath} has two more commands for dots: `\dddot{...}`²³ and `\ddddot{...}`

$\$\dddot{y}\$$: \ddot{y}

$\$\ddddot{y}\$$: \dddot{y}

Another interesting dot command is `\hdotsfor` with the syntax:

```

1 \hdotsfor[<spacing factor>]{<number of columns>}

```

With the spacing factor the width of the dots can be stretched or shrunk. The number of columns allows a continuing dotted line over more columns. Equation 85 shows the definition of a tridiagonal matrix.

²³already mentioned in section 14

$$\underline{A} = \begin{bmatrix} a_{11} & a_{12} & 0 & \dots & \dots & \dots & 0 \\ a_{21} & a_{22} & a_{23} & 0 & \dots & \dots & 0 \\ 0 & a_{32} & a_{33} & a_{34} & 0 & \dots & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ \dots & \dots & \dots & \dots & \dots & \dots & \dots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & \dots & 0 & a_{n-2,n-3} & a_{n-2,n-2} & a_{n-2,n-1} & 0 \\ 0 & \dots & \dots & 0 & q_{n-1,n-2} & a_{n-1,n-1} & a_{n-1,n} \\ 0 & \dots & \dots & \dots & 0 & a_{n,n-1} & a_{nn} \end{bmatrix} \quad (85)$$

```

1 \begin{equation}
2 \underline{A}=\left[\begin{array}{cccccc}
3 a_{11} & a_{12} & 0 & \ldots & \ldots & \ldots & 0 \\
4 a_{21} & a_{22} & a_{23} & 0 & \ldots & \ldots & 0 \\
5 0 & a_{32} & a_{33} & a_{34} & 0 & \ldots & 0 \\
6 \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\
7 \hdotsfor{7}\cr\vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\
8 0 & \ldots & 0 & a_{n-2,n-3} & a_{n-2,n-2} & a_{n-2,n-1} & 0 \\
9 0 & \ldots & \ldots & 0 & q_{n-1,n-2} & a_{n-1,n-1} & a_{n-1,n} \\
10 0 & \ldots & \ldots & \ldots & 0 & a_{n,n-1} & a_{nn} \\
11 \end{array}\right]
12 \end{equation}

```

29 fraction commands

29.1 Standard

Additional to the font size problem described in subsection 2.2 on page 4 $\mathcal{A}\mathcal{M}\mathcal{S}\mathcal{m}\mathcal{a}\mathcal{t}\mathcal{h}$ supports some more commands for fractions. The `\frac` command described in [7], does no more exist in $\mathcal{A}\mathcal{M}\mathcal{S}\mathcal{m}\mathcal{a}\mathcal{t}\mathcal{h}$.

- The global fraction definition has five parameters

```

1 \genfrac{<left delim>}{<right delim>}{<thickness>}{<mathstyle>
  >}{<nominator>}{<denominator>}

```

where thickness can have any length with a valid unit like

$$\genfrac{}{}{1pt}{}{x^2+x+1}{3x-2} \rightarrow \frac{x^2+x+1}{3x-2}$$

- `\cfrac` (continued fraction) which is by default set in the display math-

style and useful for fractions like

$$\frac{1}{\sqrt{2} + \frac{1}{\sqrt{3} + \frac{1}{\sqrt{4} + \frac{1}{\dots}}}} \quad (86)$$

which looks with the default `\frac` command like

$$\frac{1}{\sqrt{2} + \frac{1}{\sqrt{3} + \frac{1}{\sqrt{4} + \frac{1}{\dots}}}} \quad (87)$$

where the `mathstyle` decreases for every new level in the fraction. The `\cfrac` command can be called with an optional parameter which defines the placing of the nominator, which can be `[l]eft`, `[r]ight` or `[c]enter` (the default - see equation 86):

$$\begin{array}{cc} \frac{1}{\sqrt{2} + \frac{1}{\sqrt{3} + \frac{1}{\sqrt{4} + \frac{1}{\dots}}}} & \frac{1}{\sqrt{2} + \frac{1}{\sqrt{3} + \frac{1}{\sqrt{4} + \frac{1}{\dots}}}} \\ \text{(left)} & \text{(right)} \end{array}$$

- `\dfrac` which takes by default the `displaystyle`, so that fractions in inline mode $\frac{1}{2}$ have the same size than in display mode.
- `\tfrac` (vice versa to `\dfrac`) which takes by default the `scriptstyle`, so that fractions in display mode have the same size than in inline mode.

$$\begin{array}{cc} \frac{2}{3} & \text{\tfrac{2}{3}} \\ \frac{2}{3} & \text{\frac{2}{3}} \end{array}$$

29.2 Binoms

They are like fractions without a rule and its syntax is different to the `\choose` command from standard \LaTeX (see section 2.2 on page 4). $\mathcal{A}\mathcal{M}\mathcal{S}\text{\textit{math}}$ provides three different commands for binoms just like the ones for fractions.

`\binom`
`\dbinom`
`\tbinom`

30 Roots

The typesetting for roots is sometimes not the best. Some solutions for better typesetting are described in section 7 on page 18 for standard \LaTeX . $\mathcal{A}\mathcal{M}\mathcal{S}\text{\textit{math}}$ has some more commands for the n -th root:

`\leftroot`
`\uproot`

Command	Inlinemath	Displaymath
<code>\binom{m}{n}</code>	$\binom{m}{n}$	$\binom{m}{n}$
<code>\dbinom{m}{n}</code>	$\binom{m}{n}$	$\binom{m}{n}$
<code>\tbinom{m}{n}</code>	$\binom{m}{n}$	$\binom{m}{n}$

Table 17: binom commands

```
1 \sqrt[\leftroot{<number>}\uproot{<number>}<root>]{< ... >}
```

`<number>` indicates a value for the points²⁴ of which the root can be adjusted to the left and/or to the top, e.g.: $\sqrt[k_n]{a}$ (`\sqrt[k_n]{a}`) has a too deep exponent, whereas $\sqrt[k_n]{a}$ `\sqrt[\uproot{2}]{k_n}{a}` looks nicer.

30.1 Roots with `\smash` command

The default for a root with λ_{k_i} as root argument looks like $\sqrt{\lambda_{k_i}}$, which may be not the best typesetting. It is possible to reduce the lowest point of the root to the baseline with the `\smash` command: $\sqrt{\lambda_{k_i}}$ $\xrightarrow{\text{with } \texttt{\smash}}$ $\sqrt{\lambda_{k_i}}$

The syntax of the `\smash` command²⁵ renewed by the \mathcal{M} Smath package is

```
1 \smash[<position>]{<argument>}
```

The optional argument for the position can be:

t keeps the bottom and annihilates the top

b keeps the top and annihilates the bottom

tb annihilates top and bottom (the default)

31 Accents

With the macro `\mathaccent` it is easy to define new accent types, for example

```
1 \def\dotcup{${\mathaccent\cdot\cup}$}
```

⊔

Overwriting of two symbols is also possible:

↪↪↪↪

²⁴In PostScript units (bp – Big Points).

²⁵In `latex.ltx` `\smash` is defined without an optional argument.

33 EQUATION NUMBERING

In this case the second symbol has to be shifted to the left for a length of $5mu$ (mu: math unit).

```

1 \def\curvearrowleftright{%
2 \ensuremath{%
3 \mathaccent\curvearrowright{\mkern-5mu\curvearrowleft}%
4 }%
5 }

```

For other possibilities to define new accents see section 47 on page 84.

32 \mod command

In standard L^AT_EX the modulo command is not an operator, though it is often used in formulas. \mathcal{M} Smath provides two (three) different commands for modulo, which are listed in tabular 18.

- They all insert some useful space before and behind the mod-operator.

$$\begin{array}{lll}
 a \backslash \text{mod}\{n^2\}=b & \rightarrow & a \bmod n^2 = b \\
 a \backslash \text{pmod}\{n^2\}=b & \rightarrow & a \pmod{n^2} = b \\
 a \backslash \text{pod}\{n^2\}=b & \rightarrow & a \,(n^2) = b
 \end{array}$$

Table 18: The modulo commands and their meaning

33 Equation numbering

See section 3.3 on page 9 for equation numbering. It is mostly the same, $\backslash \text{numberwithin}$ only one command is new to \mathcal{M} Smath. If you want a numbering like “47” then write either in the preamble or like this example anywhere in your doc:

```

1 \numberwithin{equation}{section}

```

From now on the numbering looks like equation 47 on page 44. For the book-class you can get the same for chapters.

If you want to get rid of the parentheses then write in the preamble:

```

1 \makeatletter
2 \def\tagform@#1{\maketag@@@{\ignorespaces#1\unskip\
  @@italiccorr}}
3 \makeatother

```

Now the following four subequation numbers have no parentheses.

33.1 Subequations

Amsmath supports this with the environment `subequation`. For example:

$$y = d \quad 33.88a$$

$$y = cx + d \quad 33.88b$$

$$y = bx^2 + cx + d \quad 33.88c$$

$$y = ax^3 + bx^2 + cx + d \quad 33.88d$$

```

1 \begin{subequations}
2 \begin{align}
3 y &= d\\
4 y &= cx+d\\
5 y &= bx^2+cx+d\\
6 y &= ax^3+bx^2+cx+d
7 \end{align}
8 \end{subequations}

```

Inside of subequations only complete other environments (`\begin{...}` ... `\end{...}`) are possible.

```

1 \renewcommand{\theequation}{%
2 \theparentequation}-\arabic{equation}%
3 }

```

$$y = d \quad (33.89-1)$$

$$y = cx + d \quad (33.89-2)$$

$$y = bx^2 + cx + d \quad (33.89-3)$$

$$y = ax^3 + bx^2 + cx + d \quad (33.89-4)$$

A ref to a subequation is possible like the one to equation 33.89-2. The environment chooses the same counter “`equation`” but saves the old value into “`parentequation`”.

It is also possible to place two equations side by side with counting as subfigures:

$$y = f(x) \quad (33.90a) \qquad y = f(z) \quad (33.90b)$$

In this case, the $\mathcal{A}\mathcal{M}\mathcal{S}$ math internal subfigure counter cannot be used and an own counter has to be defined:

```

1 \newcounter{mySubCounter}
2 \newcommand{\twocoleqn}[2]{
3   \setcounter{mySubCounter}{0}%
4   \let\OldTheEquation\theequation%
5   \renewcommand{\theequation}{\OldTheEquation\alph{
6     mySubCounter}}%
7   \noindent%

```

```

7 \begin{minipage}{.49\textwidth}
8   \begin{equation}\refstepcounter{mySubCounter}
9     #1
10   \end{equation}
11 \end{minipage}\hfill%
12 \addtocounter{equation}{-1}%
13 \begin{minipage}{.49\textwidth}
14   \begin{equation}\refstepcounter{mySubCounter}
15     #2
16   \end{equation}
17 \end{minipage}%
18 \let\theequation\OldTheEquation
19 }
20 [ ... ]
21 \twocoleqn{y=f(x)}{y=f(z)}

```

34 Labels and tags

For the `\label` command see section 3.4 on page 11, it is just the same `\tag` behaviour. $\mathcal{A}\mathcal{M}\mathcal{S}$ math allows to define own single “equation numbers” with the `\tag` command.

$$\begin{array}{ll}
 f(x) = a & \text{(linear)} \\
 g(x) = dx^2 + cx + b & \text{(quadratic)} \\
 h(x) = \sin x & \text{trigonometric}
 \end{array}$$

```

1 \begin{align}
2 f(x) &= a\tag{linear}\label{eq:linear}\\
3 g(x) &= dx^2+cx+b\tag{quadratic}\label{eq:quadratic}\\
4 h(x) &= \sin x\tag{trigonometric}
5 \end{align}

```

- The `\tag` command is also possible for unnumbered equations, \LaTeX changes the behaviour when a tag is detected.
- There exists a starred version `\tag*{...}`, which suppresses any annotations like parentheses for equation numbers.
- There exist two package options for tags, `ctagsplit` and `righttag` (look at the beginning of this part on page 42).

35 Limits

By default the `sum/prod` has the limits above/below and the integral at the side. To get the same behaviour for all symbols which can have limits load the package $\mathcal{A}\mathcal{M}\mathcal{S}$ math in the preamble as

```
1 \usepackage[sumlimits,intlimits]{amsmath}
```

There exist also options for the vice versa (see page 42). See also section 41 for the additional commands `\underset` and `\overset`.

35.1 Multiple limits

For general information about limits read section 2.1 on page 4. Standard L^AT_EX provides the `\atop` command for multiple limits (section 6.1 on page 17). $\mathcal{A}\mathcal{M}\mathcal{S}$ math has an additional command for that, which can have several lines with the following syntax:

```
1 \substack{...\allowbreak...\allowbreak}
```

The environments described in [7]

```
1 \begin{Sb} ... \end{Sb}
2 \begin{Sp} ... \end{Sp}
```

```
\substack
\begin{Sb}
...
\end{Sb}
\begin{Sp}
...
\end{Sp}
```

are obsolete and no more part of $\mathcal{A}\mathcal{M}\mathcal{S}$ math.

The example equation 21 on page 18 with the `\substack` command looks like:

$$\sum_{\substack{1 \leq i \leq p \\ 1 \leq j \leq q \\ 1 \leq k \leq r}} a_{ij} b_{jk} c_{ki} \quad (35.1)$$

Insert these limits in the following way:

```
1 \begin{equation}
2 \sum_{%
3 \substack{1 \leq i \leq p \\
4 1 \leq j \leq q \\
5 1 \leq k \leq r}
6 }%
7 a_{ij} b_{jk} c_{ki}
8 \end{equation}
```

35.2 Problems

There are still some problems with limits and the following math expression. For example:

$$X = \sum_{1 \leq i \leq j \leq n} X_{ij}$$

```
1 \[
2 X = \sum_{1 \leq i \leq j \leq n} X_{ij}
3 \]
```

does not look nice because of the long limit. Using a `\makebox` also does not really solve the problem, because `\makebox` is in \TeX horizontal mode and knows nothing about the appropriate math font size, because limits have a smaller font size. It is better to define a `\mathclap` macro, similar to the two macros `\llap` and `\rlap` and uses the also new defined `\mathclap` macro:

```

1 \def\mathllap{\mathpalette\mathllapinternal}
2 \def\mathllapinternal#1#2{%
3   \llap{$\mathsurround=0pt#1{#2}$}% $
4 }
5 \def\clap#1{\hbox to 0pt{\hss#1\hss}}
6 \def\mathclap{\mathpalette\mathclapinternal}
7 \def\mathclapinternal#1#2{%
8   \clap{$\mathsurround=0pt#1{#2}$}%
9 }
10 \def\mathrlap{\mathpalette\mathrlapinternal}
11 \def\mathrlapinternal#1#2{%
12   \rlap{$\mathsurround=0pt#1{#2}$}% $
13 }

```

Now we can write limits which have a boxwidth of 0pt and the right font size and the following math expression appears just behind the symbol:

$$X = \sum_{1 \leq i \leq j \leq n} X_{ij}$$

```

1 \[
2 X = \sum_{\mathclap{1 \leq i \leq j \leq n}} X_{ij}
3 \]

```

Another problem occurs when having operators with stacked limits in braces:

$$\left[\sum_{\substack{i,j \\ i>j}} \dots \right] \quad (35.2)$$

This case is not easy to handle when some other math expressions are around the braces which should be on the same baseline. However, the following may help in some cases to get better looking braces.

$$foo \left[\sum_{\substack{i,j \\ i>j}} \dots \right] bar$$

(35.3)

```

1 \begin{align}
2 foo \left[ \begin{array}{c}
3 \displaystyle \sum_{\substack{i,j \\ i>j}} \dots
4 \end{array} \right] bar
5 \end{align}

```

35.3 \sideset

This is a command for a very special purpose, to combine over/under limits with superscript/subscripts for the sum-symbol. For example: it is not `\sideset`

possible to place the prime for the equation 35.4 near to the sum symbol, because it becomes an upper limit when writing without an preceding `{}`.

$$\sum_{\substack{n < k \\ n \text{ odd}}} 'nE_n \quad (35.4)$$

The command `\sideset` has the syntax

```
1 \sideset{<before>}{<behind>}
```

It can place characters on all four corners of the sum-symbol:

$$\begin{array}{c} \textit{UpperLeft} \\ \textit{LowerLeft} \end{array} \sum_{\textit{B}}^{\textit{T}} \begin{array}{c} \textit{UpperRight} \\ \textit{LowerRight} \end{array}$$

```
1 \[
2 \sideset{_{\textit{LowerLeft}}^{\textit{UpperLeft}}}{_{\textit{LowerRight}}^{\textit{UpperRight}}} \sum_{\textit{B}}^{\textit{T}}
3 \]
```

Now it is possible to write the equation 35.4 in a proper way with the command `\sideset{}{'}` before the sum symbol:

$$\sum_{\substack{n < k \\ n \text{ odd}}} 'nE_n \quad (35.5)$$

36 Operator names

By default variables are written in italic and operator names in upright mode, like $y = \sin(x)$.²⁶ This happens only for the known operator names, but creating a new one is very easy with:

```
1 \newcommand{\mysin}{\operatorname{mysin}}
```

Now `\mysin` is also written in upright mode $y = \mysin(x)$ and with some additional space before and behind.

It is obvious, that only those names can be defined as new operator names which are not commands in another way. Instead of using the new definition as an operator, it is also possible to use the text mode. But it is better to have all operators of the same type, so that changing the style will have an effect for all operators.

The new defined operator names cannot have limits, only superscript/subscript is possible. `amsopn.sty` has an additional command `\operatornamewithlimits`, which supports over/under limits like the one from `\int` or `\sum`.

`\operatorname`

`\operatornamewithlimits`

`\mathop`

²⁶See section 16 on page 35, where all the standard L^AT_EX known operator names are listed. Package `AMSmath` has some more (see documentation).

It is also possible to use the macro `\mathop` to declare anything as operator, like

$${}_1\mathrm{B}$$

```
1 \[ \sideset{_1}{\mathop{\mathrm{B}}}\]
```

With this definition it is possible to use `\sideset` for a forgoing index, which is only possible for an operator.

For a real $\mathrm{\LaTeX}$ definition have a look at section 16 on page 35.

37 Text in math mode

If you need complex structures between formulas, look also at section 71.

37.1 `\text` command

This is the equivalent command to `\mathrm` or `\mbox` from the standard $\mathrm{\LaTeX}$ (section 9 on page 23) with the exception, that `\mathrm` always uses the roman font and `\text` the actual one and that the font size is different when used in super- and subscript.

`\text`
`\mbox`
`\textnormal`
`\mathrm`

For example: $f(x) = x$ this was math.

$A_{\text{text}}^{\text{text}}$ $A_{\text{text}}^{\text{text}}$ $A_{\text{text}}^{\text{text}}$ $A_{\text{text}}^{\text{text}}$

```
1 $\boxed{f(x)=x\quad\text{this was math}}$
2
3 {\sffamily\huge
4 $A^{\mbox{text}}_{\mbox{text}}$\quad
5 $A^{\text{text}}_{\text{text}}$\quad
6 $A^{\textnormal{text}}_{\textnormal{text}}$\quad
7 $A^{\mathrm{text}}_{\mathrm{text}}$
8 }
```

The `\text` macro can be used at any place and can be in some cases a better solution as `\intertext` (see section 37.2).

$$12(x-1) + 20(y-3) + 14(z-2) = 0$$

and

$$6x + 10y + 7z = 0$$

$$12(x-1) + 20(y-3) + 14(z-2) = 0 \tag{37.1}$$

and

$$6x + 10y + 7z = 0 \tag{37.2}$$

```

1 \begin{flalign*}
2 && 12(x-1) + 20(y-3) + 14(z-2) &= 0 && \\
3 \text{\text{and}} && 6x + 10y + 7z &= 0 && \\
4 \end{flalign*}
5
6 \begin{align}
7 && 12(x-1) + 20(y-3) + 14(z-2) &= 0 \\
8 \text{\text{and}} && 6x + 10y + 7z &= 0 \\
9 \end{align}

```

37.2 \intertext command

This is useful when you want to place some text between two parts of math stuff without leaving the math mode, like the name “intertext” says. For example we write the equation II-79 on page 52 with an additional command after the second line.

$$\begin{aligned}
 A_1 &= \left| \int_0^1 (f(x) - g(x)) dx \right| + \left| \int_1^2 (g(x) - h(x)) dx \right| \\
 &= \left| \int_0^1 (x^2 - 3x) dx \right| + \left| \int_1^2 (x^2 - 5x + 6) dx \right|
 \end{aligned}$$

Now the limits of the integrals are used

$$\begin{aligned}
 &= \left| \frac{x^3}{3} - \frac{3}{2}x^2 \right|_0^1 + \left| \frac{x^3}{3} - \frac{5}{2}x^2 + 6x \right|_1^2 \\
 &= \left| \frac{1}{3} - \frac{3}{2} \right| + \left| \frac{8}{3} - \frac{20}{2} + 12 - \left(\frac{1}{3} - \frac{5}{2} + 6 \right) \right| \\
 &= \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| = \frac{7}{6} + \frac{5}{6} = 2 \text{ FE}
 \end{aligned}$$

The code looks like:

```

1 \begin{equation}
2 \begin{split}
3 A_{1} &= \left| \int_0^1 (f(x) - g(x)) dx \right| + \left| \int_1^2 (g(x) - h(x)) dx \right| \\
4 &= \left| \int_0^1 (x^2 - 3x) dx \right| + \left| \int_1^2 (x^2 - 5x + 6) dx \right| \\
5 \intertext{Now the limits of the integrals are used}
6 &= \left| \frac{x^3}{3} - \frac{3}{2}x^2 \right|_0^1 + \left| \frac{x^3}{3} - \frac{5}{2}x^2 + 6x \right|_1^2 \\
7 &= \left| \frac{1}{3} - \frac{3}{2} \right| + \left| \frac{8}{3} - \frac{20}{2} + 12 - \left( \frac{1}{3} - \frac{5}{2} + 6 \right) \right| \\
8 &= \left| -\frac{7}{6} \right| + \left| \frac{14}{3} - \frac{23}{6} \right| = \frac{7}{6} + \frac{5}{6} = 2 \text{ FE}
\end{split}
\end{equation}

```

```

9      \left( \frac{1}{3}-\frac{5}{2}+6\right) \right| \\\
10      & = \left| -\frac{7}{6}\right| +\left| \frac{14}{3}-\frac{23}{6}\right| \\
11      \right| =\frac{7}{6}+ \\
12      \frac{5}{6}=2\,, \text{\textterm{FE}} \\
13 \end{split} \\
\end{equation}

```

Writing very long text is possible by using a `parbox`, see section 9 on page 23 for an example with `\textrm`, which behaves in the same way as `\text`.

38 Extensible arrows

To write something like $\xrightarrow[\text{below}]{\text{above the arrow}}$ you can use the following macro

`\xrightarrow`
`\xleftarrow`
`\xmapsto`

`\xrightarrow[\text{below}]{\text{above the arrow}}`

and the same with `\xleftarrow`. You can define your own extensible arrow macros if you need other than these two predefined ones. To get a doublelined extensible arrow like `\Longlefttrightarrow` (\Longleftrightarrow) but with the same behaviour as an extensible one, write in the preamble

```

1 \newcommand\xLongLeftRightArrow[2][\%
2   \ext@arrow 0055{\LongLeftRightArrowfill@}{#1}{#2}}
3 \def\LongLeftRightArrowfill@{\%
4   \arrowfill@{\Leftarrow\Relbar\Rightarrow}
5 \newcommand\xlonglefttrightarrow[2][\%
6   \ext@arrow 0055{\longlefttrightarrowfill@}{#1}{#2}}
7 \def\longlefttrightarrowfill@{\%
8   \arrowfill@{\leftarrow\relbar\rightarrow}

```

The three parts `\Leftarrow\Relbar\Rightarrow` define left|middle|right of the arrow, where the middle part would be stretched in a way that the arrow is at least as long as the text above and/or below it. This macro has one optional and one standard parameter. The optional one is written below and the standard one above this arrow. Now we can write

`\xLongLeftRightArrow[\text{below}]{\text{above the arrow}}`
`\xlonglefttrightarrow[\text{below}]{\text{above the arrow}}`

to get $\xrightarrow[\text{below}]{\text{above the arrow}}$ or $\xleftarrow[\text{below}]{\text{above the arrow}}$. The “number” 0055 after `\ext@arrow` defines the position relative to the extended error and is not a number but four parameters for additional space in the math unit μ .

```

1 \def\mapstofill@{\%
2   \arrowfill@{\mapstochar\relbar}\relbar\rightarrow}
3 \newcommand*\xmapsto[2][\%
4   \ext@arrow <four digits>\mapstofill@{#1}{#2}}

```

<code>\ext@arrow 0000\$</code>	$\overrightarrow{\hspace{1cm}}$
<code>\ext@arrow 9000\$</code>	$\underover{\hspace{1cm}}{\hspace{1cm}}$
<code>\ext@arrow 0900\$</code>	$\overunder{\hspace{1cm}}$
<code>\ext@arrow 0009\$</code>	$\overunder{\hspace{1cm}}$
<code>\ext@arrow 0090\$</code>	$\underover{\hspace{1cm}}$
<code>\ext@arrow 0099\$</code>	$\overunder{\hspace{1cm}}$
<code>\ext@arrow 9999\$</code>	$\under{\hspace{1cm}}$

- 1st digit: space left
- 2nd digit: space right
- 3rd digit: space left and right
- 4th digit: space relative to the tip of the “arrow”

The two macros `\xrightarrow` and `\xleftarrow` are defined as:

```

1 \newcommand{\xrightarrow}[2][\ext@arrow 0359\
  rightarrowfill@{#1}{#2}]
2 \newcommand{\xleftarrow}[2][\ext@arrow 3095\leftarrowfill@
  {#1}{#2}]

```

39 Frames

$\mathcal{A}\mathcal{M}\mathcal{S}$ math knows the macro `\boxed` which can be used for inline $a\boxed{b+c}$ and displayed math expressions:

$$\boxed{f(x) = \int_1^\infty \frac{1}{x^2} dt = 1} \quad (39.1)$$

```

1 \begin{align}
2 \boxed{f(x)=\int_1^{\infty}\frac{1}{x^2}\,dt=1}
3 \end{align}

```

For coloured boxes use package `empheq`. For an example see section 55 on page 90.

40 Greek letters

The $\mathcal{A}\mathcal{M}\mathcal{S}$ math package simulates a bold font for the greek letters by writing a greek character twice with a small kerning. This is done with the macro `\pmb{<letter>}`. The `\mathbf{<character>}` doesn't work with lower greek character.

α	α
β	β
γ	γ
δ	δ
ϵ	ϵ
...	...

`\pmb`

41 Miscellaneous commands

There are several commands which can be used in math mode:

Some examples are shown in table 19.

`\overset`
`\underset`
`\boxed`

$\$\underset{under}{baseline}\$$	$baseline$ $under$
$\$\overset{over}{baseline}\$$	$over$ $baseline$

Table 19: Different mathcommands

`\underset` is a useful macro for having limits under non-operators (see page 85).

Part III

T_EX and math

There is in general no need to use the T_EX macros, because the ones defined with L^AT_EX or with $\mathcal{A}\mathcal{M}\mathcal{S}$ math are much more useful. Nevertheless there may be situations, where someone has to use one of the T_EX macros or special T_EX math length. One can not expect, that all macros work in the usual way, a lot of them are redefined by L^AT_EX or $\mathcal{A}\mathcal{M}\mathcal{S}$ math. On the other hand some of these basic macros or length definitions are used in the T_EX way, so it might be interesting to have all declared in a short way for some information.

42 Length registers

42.1 `\abovedisplayshortskip`

A length with glue, see section 11.5.1 for an example.

42.2 `\abovedisplayskip`

A length with glue, see section 11.5.1 for an example.

42.3 `\belowdisplaysshortskip`

A length with glue, see section 11.5.1 for an example.

42.4 `\belowdisplayskip`

A length with glue, see section 11.5.1 for an example.

42.5 `\delimiterfactor`

The height of a delimiter is often not optimally calculated by T_EX. In some cases it is too short. With `\delimiterfactor` one can correct this height. The delimiterheight is $< \text{calculated height} > \cdot < \#1 > / 1000$ where `#1` is the parameter of `\delimiterfactor`. The default value is 901.

$$y = \begin{cases} x^2 + 2x & \text{if } x < 0, \\ x^3 & \text{if } 0 \leq x < 1, \\ x^2 + x & \text{if } 1 \leq x < 2, \\ x^3 - x^2 & \text{if } 2 \leq x. \end{cases}$$

```

1 \[
2 y = \left\{ \begin{array}{ll}
3   x^2+2x & \text{\textrm{if } } x<0, \\
4   x^3      & \text{\textrm{if } } 0\leq x<1, \\
5   x^2+x    & \text{\textrm{if } } 1\leq x<2, \\
6   x^3-x^2  & \text{\textrm{if } } 2\leq x. \\
7 \end{array} \right.
8 \end{array} \right.
9 \right.
10 \]
```

$$y = \begin{cases} x^2 + 2x & \text{if } x < 0, \\ x^3 & \text{if } 0 \leq x < 1, \\ x^2 + x & \text{if } 1 \leq x < 2, \\ x^3 - x^2 & \text{if } 2 \leq x. \end{cases}$$

```

1 \[
2 \delimiterfactor=1500
3 y = \left\{ %
4 \begin{array}{ll}
5   x^2+2x & \text{\textrm{if }x<0,\\
6   x^3      & \text{\textrm{if }0\le x<1,\\
7   x^2+x    & \text{\textrm{if }1\le x<2,\\
8   x^3-x^2  & \text{\textrm{if }2\le x.}
9 \end{array} %
10 \right.
11 \]
```

42.6 `\delimitershortfall`

Additionally to the forgoing `\delimiterfactor` one can modify the height of the delimiter with another value. \TeX makes the delimiter larger than the values of $< \text{calculated height} > \cdot < \text{delimiterfactor} > / 1000$ and $< \text{calculated height} > - < \text{delimitershortfall} >$. This makes it possible to always get different heights of a sequence of delimiters.

$$x \cdot ((x^2 - y^2) - 3)$$

$$x \cdot \left((x^2 - y^2) - 3 \right)$$

```

1 $x\cdot\left(\left(x^2-y^2\right)-3\right)$$\[7
  pt]
2
3 $
4 \delimitershortfall-1pt
5 x\cdot\left(\left(x^2-y^2\right)-3\right)$
```

$$(((A)))$$

$$\left(\left(\left(A \right) \right) \right)$$

```

1 $\left(\left(\left(A\right)\right)\right)$$\[7pt]
2
3 $\delimitershortfall-1pt
4 \left(\left(\left(A\right)\right)\right)$
```

42.7 `\displayindent`

This is the left shift amount of a line holding displayed equation. By default it is $0pt$ but gets the value of an indented paragraph when there is an environment like the quotation one.

The following formula is typeset in the usual way without modifying anything.

$$f(x) = \int \frac{\sin x}{x} dx$$

Now we start a quotation environment which sets `\labelwidth` to new values for a greater left margin.

- The following formula is typeset in the usual way without modifying anything.

$$f(x) = \int \frac{\sin x}{x} dx$$

- Now we write the same equation, but now with modifying `\displayindent`, it is set to the negative `\labelwidth`:

$$f(x) = \int \frac{\sin x}{x} dx$$

```

1 \[
2   \displayindent=-\leftskip
3   f(x) = \int \frac{\sin x}{x} dx
4 \]
```

42.8 `\displaywidth`

The width of the line holding a displayed equation, which is by default `\linewidth`. In the second example the formula is centered for a display width of `0.5\linewidth`.

$$f(x) = \int \frac{\sin x}{x} dx$$

```

1 \[ f(x) = \int \frac{\sin x}{x} dx \]
2 \[
3   \displaywidth=0.5\linewidth
4   f(x) = \int \frac{\sin x}{x} dx
5 \]
```

42.9 `\mathsurround`

Extra space added when switching in and out of the inline math mode (see section 11.5).

42.10 `\medmuskip`

See section 11.1 for an example.

42.11 `\mkern`

Similar to `\kern`, but adds a math kern item to the current math list. Length must be a math unit.

42.12 `\mskip`

Similar to `\skip`, but adds math glue to the current math list. Length must be a math unit.

42.13 `\muskip`

Assigns a length with a math unit to one of the 256 `\muskip` register.

42.14 `\muskipdef`

Defines a symbolic name for a `\muskip` register.

42.15 `\nonscript`

Ignores immediately following glue or kern in script and scriptscript styles, which makes a redefinition of `\mathchoice` superfluous.

42.16 `\nulldelimiterspace`

This is the width of a null or missing delimiter, e.g. `\right.` or for the left one.

42.17 `\preplaysize`

Is the effective width of the line preceeding a displayed equation, whether `\abovedisplayskip` or `abovedisplayshortskip` is used for the vertical skip.

42.18 `\scriptspace`

The space inserted after an exponent or index, predefined as `\scriptspace=0.5pt`

42.19 `\thickmuskip`

See section 11.1.

42.20 `\thinmuskip`

The short version for positive skip is defined as `\def\,{\mskip\thinmuskip}` and the one for a negative skip as `\def\!{\mskip-\thinmuskip}` (see also section 11.1).

$$\begin{array}{l} \sqrt{2}x - \sqrt{2}x \\ \sqrt{\log x} - \sqrt{\log x} \\ P(1/\sqrt{n}) - P(1/\sqrt{n}) \\ [0,1) - [0,1) \\ x^2/2 - x^2/2 \end{array}$$

```
1 $\sqrt{2} x$ -- $\sqrt{2}\,x$\\
2 $\sqrt{\log x}$ -- $\sqrt{\,\log x}$\\
3 $P\left(\frac{1}{\sqrt{n}}\right)$ -- $P\left(\frac{1}{\sqrt{n}}\right)$\\
4 $[0,1)$ -- $[\,0,1)$\\
5 $x^2/2$ -- $x^2\!/2$\\
```

42.21 \medmuskip

43 Math font macros

Each character has not only a `\catcode` and `\mathcode` but also a `\delcode` which defines for a single character how it should look when used as a math delimiter.

Every character can be declared as a delimiter, but \TeX must know which characters should be used for the default and the big size. For \LaTeX the macro `\DeclareMathDelimiter` should be used (see section 8.2).

$\uparrow x - y \downarrow (x + y) = x^2 - y^2$
 $\uparrow \sum_{n=0}^{\infty} \frac{1}{2^n} \downarrow^2 = 4$
 $\uparrow \left(\sum_{n=0}^{\infty} \frac{1}{2^n} \right)^2 = 4$

See section 12 for an example.

When TeX switches into the math mode, it typesets everything using one of the 16 possible families of fonts. `\fam` in an internal register where other macros can check which font is the actual one. At the beginning TeX starts with `\fam=-1`.

$123abcABC\alpha\beta\gamma(0)$
 $\mathbf{123abcABC\alpha\beta\gamma(6)}$
 $123abcABC\alpha\beta\gamma(12)$
 $123abcABC\alpha\beta\gamma(13)$
 $123abcABC\alpha\beta\gamma(14)$
 $123abcABC\alpha\beta\gamma(1)$

```

1  $\mathrm{123abcABC\alpha\beta\gamma}$  (\the\fam)
   }$\\[5pt]
2  $\mathbf{123abcABC\alpha\beta\gamma}$  (\the\fam)
   }$\\[5pt]
3  $\mathit{123abcABC\alpha\beta\gamma}$  (\the\fam)
   }$\\[5pt]
4  $\mathtt{123abcABC\alpha\beta\gamma}$  (\the\fam)
   }$\\[5pt]
5  $\mathsf{123abcABC\alpha\beta\gamma}$  (\the\fam)
   }$\\[5pt]
6  $\mathnormal{123abcABC\alpha\beta\gamma}$  (\the\fam)}$

```

Requires three parameter as one number, the class, the font family and the character.

```
1 \def\dA{\mathaccent"7015\relax}
2 {\Large $\dA{A}$}
```

Declares a following character as a binary symbol with another spacing before and behind such a symbol.

```
1 {\Large
2 $a|b \quad a\mathbin{|} b$}
```

Declares a math character by three integer numbers as Parameters, giving its class, font family, and font position. In the following example `\mathchar` defines a character of class 1 (big operators), font family 3 (math extension font) and number 58 (big sum character).

$$a \sum_{i=1}^{\infty} b \quad a \sum_{i=1}^{\infty} b$$

```

1 {\Large
2 $a\sum\limits_{i=1}^{\infty} b \quad
3 a\mathchar"1358\limits_{i=1}^{\infty} b$}

```

43.8 `\mathchardef`

This is in principle the same as `\mathchar`, it only allows to make such definitions permanent.

$$a \sum_{i=1}^{\infty} \sqrt{i+1}$$

$$a \sum_{i=1}^{\infty} \sqrt{i+1}$$

```

1 \bgroup
2 \mathchardef\sum="1358
3 $a\sum\limits_{i=1}^{\infty}\sqrt{i+1}$\ [5pt]
4 \egroup
5
6 $a\sum\limits_{i=1}^{\infty}\sqrt{i+1}$

```

43.9 `\mathchoice`

Specifies specific subformula sizes for the 4 main styles: `displaystyle` – `textstyle` – `scriptstyle` – `scriptscriptstyle`.

$$\sum_{i=1}^{\infty} \left| \frac{\sqrt{i+1}}{i^2} \right|$$

```

1 \Large
2 \def\myRule{{%
3   \color{red}%
4   \mathchoice{\rule{2pt}{20pt}}{\rule{1pt}{10pt}}%
5     {\rule{0.5pt}{5pt}}{\rule{0.25pt}{2.5pt}}%
6   \mkern2mu}}
7 $ \myRule\sum\limits_{\myRule i=1}^{\myRule\infty}%
8 \myRule\frac{\myRule\sqrt{\myRule i+1}}{\myRule i^2}$

```

43.10 `\mathclose`

Assigns class 5 (closing character) to the following parameter, which can hold a single character or a subformula.

$$A : \frac{B}{C} : D$$

$$A : \frac{B}{C} : D$$

```

1 {\large
2 $A:\frac{B}{C}:D$\ [5pt]
3 $A\mathopen:\frac{B}{C}\mathclose: D $}

```

43.11 `\mathcode`

A math font is far different from a text font. A lot of the characters has to be defined with `\mathcode`, which defines the character with its class, font family and character number, e.g. `\mathcode'\<="313C`. It defines the character “<” as a relation symbol (class 3) from the font family 1 and the character number 0x3C, which is 60 decimal.

43.12 `\mathop`

Assigns class 1 (large operator) to the parameter, which can be a single character or a subformula.

$$A_{i=1}^{\infty}$$

$$\mathop{A}_{i=1}^{\infty}$$

```
1 \[ A_{i=1}^{\infty} \]
2 \[ \mathop{A}_{i=1}^{\infty} \]
```

43.13 `\mathopen`

Vice versa to `\mathclose` (see section 43.10).

43.14 `\mathord`

Assigns class 0 (ordinary character) to the following parameter, which can be a single character or a subformula.

$$y = f(x)$$

$$y\mathord{=}f(x)$$

```
1 {\large
2 $y = f(x)$\\[5pt]
3 $y \mathord{=} f(x)$}
```

43.15 `\mathpunct`

Assigns class 6 (punctuation) to the following parameter, which can be a single character or a subformula (see section 11.4 for an example).

43.16 `\mathrel`

Assigns class 3 (relation) to the following parameter, which can be a single character or a subformula.

$$x_1 O x_2 O x_3$$

$$x_1 \mathrel{O} x_2 \mathrel{O} x_3$$

```
1 {\large
2 $x_1 O x_2 O x_3$\\[5pt]
3 $x_1 \mathrel{O} x_2 \mathrel{O} x_3$}
```

43.17 `\scriptfont`

Specifies the scriptstyle font (used for super/subscript) for a family.

$$A_1 A_1$$

```
1 $A_1$
2 \font\tenxii=cmr12
3 \scriptfont0=\tenxii
4 $A_1$
```

43.18 `\scriptscriptfont`

Specifies the scriptscriptstyle font for a family.

43.19 `\scriptscriptstyle`

Selects scriptscript style for the following characters.

43.20 `\scriptstyle`

Selects script style for the following characters.

43.21 `\skew`

Especially for italic characters double accents are often misplaced. `\skew` has three arguments

horizontal shift: A value in math units for the additional shift of the accent.

the accent: The symbol which is placed above the character.

the character: This is in general a single character, but can also include itself an accent.

\mathcal{M} Smath redefines the setting of double accents. This is the reason why there are only a few cases where someone has to use `\skew` when `amsmath.sty` is loaded, like in this document.

\tilde{i}	\tilde{A}	1 <code>\large</code>
		2 <code>\$_{\tilde{i}}\$ \quad \$_{\tilde{A}}\$ \[5pt]</code>
$\tilde{\tilde{i}}$	$\tilde{\tilde{A}}$	3 <code>\$_{\skew{3}{\tilde{i}}}\$ \quad \$_{\skew{7}{\tilde{A}}}\$</code>

43.22 `\skewchar`

Is -1 or the character (reference symbol) used to fine-tune the positioning of math accents.

43.23 `\textfont`

Specifies the text font for a family.

43.24 `\textstyle`

Selects the text style for the following characters.

44 Math macros

44.1 `\above`

$\frac{a}{b}$	1 <code>\$a\above0pt b\$\[8pt]</code>
$\frac{a}{b}$	2
$\frac{a}{b}$	3 <code> \${a\above1pt b}\$\[8pt]</code>
$\frac{a}{b}$	4
$\frac{a}{b}$	5 <code> \${a\above2.5pt b}\$\[8pt]</code>
$\frac{a}{b}$	6
$\frac{a}{b}$	7 <code> \$\displaystyle{a\above0pt b}\$</code>

44.2 `\abovewithdelims`

$\left(\frac{a}{b}\right)$	1 <code>\$a\abovewithdelims()0pt b\$\[8pt]</code>
$\left(\frac{a}{b}\right)$	2
$\left(\frac{a}{b}\right)$	3 <code> \def\fdelimA{\abovewithdelims\{ }1.0pt}</code>
$\left(\frac{a}{b}\right)$	4 <code> \${a\fdelimA b}\$\[8pt]</code>
$\left[\frac{a}{b}\right]$	5
$\left[\frac{a}{b}\right]$	6 <code> \def\fdelimB{\abovewithdelims[]2.0pt}</code>
$\left[\frac{a}{b}\right]$	7 <code> \${a\fdelimB b}\$\[8pt]</code>
$\left\{\frac{a}{b}\right\}$	8
$\left\{\frac{a}{b}\right\}$	9 <code> \def\fdelimC{\abovewithdelims\{.0pt}</code>
$\left\{\frac{a}{b}\right\}$	10 <code> \$\displaystyle{a\fdelimC b}\$</code>

44.3 `\atop`

$\frac{a}{b}$	1 <code>\$a\atop b\$\[8pt]</code>
$\frac{a}{b}$	2
$\binom{n}{k} = \frac{n!}{k!(n-k)!}$	3 <code> \${\{n \atop k\}} = {n!\above1pt k!(n-k)!}\$\[8pt]</code>
$\frac{a}{b}$	4
$\frac{a}{b}$	5 <code> \$\displaystyle{a\atop b}\$</code>

44.4 `\atopwithdelims`

$\left(\frac{a}{b}\right)$	1 <code>\$a\atopwithdelims() b\$\[8pt]</code>
$\left(\frac{a}{b}\right)$	2
$\binom{n}{k} = \frac{n!}{k!(n-k)!}$	3 <code> \${\{n \atopwithdelims() k\}} = {n!\above1pt k!(n-k)!}\$\[8pt]</code>
$\left(\frac{a}{b}\right)$	4
$\left\{\frac{a}{b}\right\}$	5 <code> \$\displaystyle{a\atopwithdelims\{. b}\$</code>

44.5 `\displaylimits`

Resets the conventions for using limits with operators to the standard for the used environment.

44.6 `\eqno`

Puts an equation number at the right margin, the parameter can hold anything. `\eqno` places only the parameter, but doesn't increase any equation counter.

$$y = f(x) \quad (A12)$$

```
1 \[ y=f(x) \eqno{(A12)} \]
```

44.7 `\everydisplay`

Inserts the parameter at the start of every switch to display math mode.

$$f(x) = \int \frac{\sin x}{x} dx$$

$$g(x) = \int \frac{\sin^2 x}{x^2} dx$$

```
1 \everydisplay{\color{red}
2 }
3 \[ f(x) = \int \frac{\sin x}{x} dx \]
4 \[ g(x) = \int \frac{\sin^2 x}{x^2} dx \]
```

44.8 `\everymath`

Same as `\everydisplay`, but now for the inline mode. In the following example the `displaystyle` is used (besides using color red) for every inline math expression.

$$f(x) = \int \frac{\sin x}{x} dx$$

Instead of $\frac{\sin x}{x}$ now with $\frac{\cos x}{x}$:

$$g(x) = \int \frac{\cos x}{x} dx$$

```
1 \everymath{\color{red}%
2 \displaystyle}
3 \[ f(x) = \int \frac{\sin x}{x} dx \]
4 Instead of $\frac{\sin x}{x}$
5 now with $\frac{\cos x}{x}$:
6 \[ g(x) = \int \frac{\cos x}{x} dx \]
```

Pay attention for side effects on footnotes and other macros which use the math mode for superscript and other math related modes. In this case you'll get the footnotes also in red.

44.9 `\left`

\TeX calculates the size of the following delimiter needed at the left side of a formula. Requires an additional `right`.

44.10 `\leqno`

Vice versa to `\eqno` (see section 44.6).

44.11 `\limits`

Typesets limits above and/or below operators (see section 6).

Defines the following parameter as subformula.

The opposit of \limits, instead of above/below limits are placed to the right of large operators (class 1).

Is equivalent to the fraction macro of L^AT_EX and equivalent to the `\overwithdelims`, see section 44.16.

44.15 \overline

Puts a line over the following character or subformula and has the same problems with different heights as underlines (see section 44.19).

44.16 \overwithdelims

Is a generalized fraction command with preset fraction bar thickness.

44.17 \radical

Makes a radical atom from the delimiter (27-bit number) and the math field.

$\sqrt{\frac{1}{7}}$	1 \def\mySqrt{\radical"0270371\relax}
	2 \$ \mySqrt{\frac{1}{7}} \$\\[5pt]
$\sqrt{\frac{1}{7}}$	3
	4 \def\mySqrt{\radical"0270372\relax}
	5 \$ \mySqrt{\frac{1}{7}} \$\\[5pt]
$\sqrt{\frac{1}{7}}$	6
	7 \def\mySqrt{\radical"0270373\relax}
	8 \$ \mySqrt{\frac{1}{7}} \$\\[5pt]
$\sqrt{\frac{1}{7}}$	9
	10 \def\mySqrt{\radical"0270374\relax}
	11 \$ \mySqrt{\frac{1}{7}} \$\\[5pt]

44.18 \right

Opposite to `\left`, makes \TeX calculate the size of the delimiter needed at the right of a formula.

44.19 \underline

When there is a combination of variables with and without an index, the underlines are typeset with a different depth. Using `\vphantom` in this case is a good choice.

$\underline{x} + \underline{y} = \underline{z}$	1 \$\underline{x} + \underline{y} = \underline{z}\$\\
$\underline{x} + \underline{y} = \underline{z}$	2
$\underline{x_1} + \underline{y_2} = \underline{z_3}$	3 \let\ul\underline
	4 \def\yPh{\vphantom{y}}
	5 \$ \ul{x\yPh} + \ul{y} = \ul{z\yPh} \$\\
	6
	7 \$ \ul{x_1} + \ul{y_2} = \ul{z_3} \$

44.20 \vcenter

Centers vertical material with respect to the axis.

45 Math penalties**45.1 \binoppenalty**

A penalty for breaking math expressions between lines in a paragraph. \TeX breaks lines only when the binary symbol is not the last one and when the penalty is below 10,000.

45.2 \displaywidowpenalty

The penalty which is added after the penultimate line immediately preceding a display math formula.

45.3 `\postdisplaypenalty`

Is added immediately after a math display ends.

45.4 `\predisplaypenalty`

Is added immediately before a math display starts.

45.5 `\relpenalty`

The penalty for a line break after a relation symbol (if a break is possible).

Part IV

Other packages

The following sections are not a replacement for the package documentation!

46 List of available math packages

accents	alphalph	amsart	amsbook
amsbsy	amscd	amscs	amsfonts
amslatex	amsltx11	amsmath	amsppt
amsppt1	amsproc	amssym (plain TeX)	amssymb (LaTeX)
amstex (Plain TeX)	amstext	amsthm	bez123
bitfield	brclc	breqn	cancel
cases	comma	datenummer	diagxy
doublestroke	easyeqn	easybmat	easymat
eqnarray	esvect	fixmath	ftlpoint
icomma	leftidx	mathdots	mathematica
mil3	mtbe	Nath	numprint
random	romannum	TeXaide	

The following examples depend on the listed versions of the packages:

<code>amsopn.sty</code>	1999/12/14 v2.01 operator names
<code>bm.sty</code>	1999/07/05 v1.0g Bold Symbol Support (DPC/FMi)
<code>empheq.sty</code>	2004/08/03 v2.11 Emphasizing equations (MH)
<code>amscd.sty</code>	1999/11/29 v2.0
<code>accents.sty</code>	2000/08/06 v1.2 Math Accent Tools
<code>framed.sty</code>	2002/12/29 v 0.5: framed or shaded text with page breaks
<code>pstcol.sty</code>	2001/06/20 v1.1 PSTricks color colompatibility (DPC)
<code>pstricks.sty</code>	2004/05/06 v0.2k LaTeX wrapper for ‘PSTricks’ (RN,HV)
<code>pstricks.tex</code>	2003/03/07 v97 patch 15 ‘PSTricks’ (tvz)
<code>pst-node.sty</code>	1997/03/25 package wrapper for PSTricks pst-node.tex
<code>delarray.sty</code>	1994/03/14 v1.01 array delimiter package (DPC)
<code>xypic.sty</code>	1999/02/16 Xy-pic version 3.7
<code>exscale.eps</code>	Graphic file (type veps)

47 accents

If you want to write for example an underlined M, then you can do it by

<code>\underline{\$M\$}</code>	<u>M</u>
<code>\underbar{\$M\$}</code>	<u>M</u>
<code>\underaccent{\bar}{M}</code>	<u>M</u>

As seen, there is no difference between `\underline` and `\underbar`. For some reasons it may be better to use the package `accents.sty` with the `\underaccents` macro.

48 amscd – commutative diagrams

`amscd.sty` is part of the $\mathcal{A}\mathcal{M}\mathcal{S}$ math bundle or available at CTAN²⁷ and has no options for the `\usepackage` command. `amscd.sty` does not support diagonal arrows but is much easier to handle than the complex `pstricks` or the `xypic` package. On the other hand simple diagrams can be written with the `array` environment or look at [23].

$$\begin{array}{ccc} R \times S \times T & \xrightarrow{\text{restriction}} & S \times T \\ \text{proj} \downarrow & & \downarrow \text{proj} \\ R \times S & \xleftarrow{\text{inclusion}} & S \end{array}$$

```

1 \[
2 \begin{CD}
3   R\times S\times T @>\text{restriction}>> S\times T \\
4   @V\text{proj}VV @VV\text{proj}V \\
5   R\times S @<<\text{inclusion}<< S \\
6 \end{CD}
7 \]
```

49 amsopn

With this package it is very easy to declare new math operators, which are written in upright mode:

$$\underset{s=p}{Res} \text{ versus } \underset{s=p}{Res}$$

```

1 \documentclass[10pt]{article}
2 \usepackage{amsmath}
3 \usepackage{amsopn}
4 \DeclareMathOperator{\Res}{Res}
5 \begin{document}
6 $\underset{s=p}{\Res}\quad\underset{s=p}{\Res}$
7 \end{document}
```

Table 20 shows the predefined operatornames of `amsopn`.

²⁷CTAN://macros/latex/required/amslatex/math/amscd.dtx

<code>\arccos</code>	arccos	<code>\arcsin</code>	arcsin	<code>\arctan</code>	arctan
<code>\arg</code>	arg	<code>\cos</code>	cos	<code>\cosh</code>	cosh
<code>\cot</code>	cot	<code>\coth</code>	coth	<code>\csc</code>	csc
<code>\deg</code>	deg	<code>\det</code>	det	<code>\dim</code>	dim
<code>\exp</code>	exp	<code>\gcd</code>	gcd	<code>\hom</code>	hom
<code>\inf</code>	inf	<code>\injlim</code>	inj lim	<code>\ker</code>	ker
<code>\lg</code>	lg	<code>\lim</code>	lim	<code>\liminf</code>	lim inf
<code>\limsup</code>	lim sup	<code>\ln</code>	ln	<code>\log</code>	log
<code>\max</code>	max	<code>\min</code>	min	<code>\Pr</code>	Pr
<code>\projlim</code>	proj lim	<code>\sec</code>	sec	<code>\sin</code>	sin
<code>\sinh</code>	sinh	<code>\sup</code>	sup	<code>\tan</code>	tan
<code>\tanh</code>	tanh				

Table 20: The predefined operators of `amsopn.sty`

50 bigdel

This is a very useful package together with the `multirow.sty` package. In the following example we need additional parentheses for a different number of rows. This is also possible with the `array` environment, but not as easy as with `bigdelim.sty`. The trick is that you need one separate column for a big delimiter, but with empty cells in all rows, which the delimiter spans.

$$\left(\begin{array}{ccccc} & x_{11} & x_{12} & \dots & x_{1p} \\ & x_{21} & x_{22} & \dots & x_{2p} \\ & \vdots & & & \\ \text{text} \left[\begin{array}{ccccc} x_{n_1 1} & x_{n_1 2} & \dots & x_{n_1 p} \\ x_{n_1+1,1} & x_{n_1+1,2} & \dots & x_{n_1+1,p} \\ \vdots & & & \\ x_{n_1+n_2,1} & x_{n_1+n_2,2} & \dots & x_{n_1+n_2,p} \\ \vdots & & & \end{array} \right. & \left. \begin{array}{l} \} \text{some text} \\ \\ \} \text{some more text} \end{array} \right) \end{array}$$

```

1 \[
2   \begin{pmatrix}
3     & x_{11} & x_{12} & \dots & x_{1p} & \rdelim\}{4}{3cm}[some text]\\
4     & x_{21} & x_{22} & \dots & x_{2p} & \\
5     & \vdots & & & & \\
6     & x_{n_1 1} & x_{n_1 2} & \dots & x_{n_1 p} & \\
7     & x_{n_1+1,1} & x_{n_1+1,2} & \dots & x_{n_1+1,p} & \\
8     & \vdots & & & & \\
9     & x_{n_1+n_2,1} & x_{n_1+n_2,2} & \dots & x_{n_1+n_2,p} & \\
10    & \vdots & & & & \\
11    & & & & & \\
12  \end{pmatrix}
13 \]
```

As seen in the above listing the left big delimiter is placed in the first column, all other rows start with second column. It is possible to use all columns above and below the delimiter. For the `array` environment there must be two more columns defined, in case of a big delimiter left and right. The syntax of `\ldelim` and `\rdelim` is:

```
\ldelim<delimiter>{<n rows>}{<added horizontal space>}[<text>]
\rdelim<delimiter>{<n rows>}{<added horizontal space>}[<text>]
```

Any delimiter which is possible for the `\left` or `\right` command is allowed, e.g.: “() [] {} |”. The text is an optional argument and always typeset in text mode.

51 bm

By default the math macro `\mathbf` writes everything in bold and in upright mode $y = f(x)$ (`\mathbf{y=f(x)}`), but it should be in italic mode especially for variables $y = f(x)$ (`\bm{y=f(x)}`). For writing a whole formula in bold have a look at section 22 on page 39.

52 braket

It is available at CTAN://macros/latex/contrib/other/misc/braket.sty and provides several styles for writing math expressions inside brackets. For example:

$$\left\{ x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right\}$$

```
1 \[ \left\{ x \in \mathbf{R} \mid 0 < |x| < \frac{5}{3} \right\} \]
```

looks not quit right and it is not really easy to get the first vertical line in the same size as the outer braces. Some solution may be using `\vphantom`:

$$\left\{ x \in \mathbf{R} \left| 0 < |x| < \frac{5}{3} \right. \right\}$$

```
1 \[
2 \left\{ \vphantom{\frac{5}{3}} x \in \mathbf{R} \right| 0 < |x| < \frac{5}{3} \left. \right\}
3 \]
```

`braket.sty` has the macros

```
1 \Bra{<math expression>}
2 \Ket{<math expression>}
3 \Braket{<math expression>}
4 \Set{<math expression>}
```

and the same with a leading lower letter, which are not really interesting.

$$\left\langle x \in \mathbf{R} \middle| 0 < |x| < \frac{5}{3} \right\rangle$$

$$\left| x \in \mathbf{R} \middle| 0 < |x| < \frac{5}{3} \right\rangle$$

$$\left\langle x \in \mathbf{R} \middle| 0 < \left| x \right| < \frac{5}{3} \right\rangle$$

$$\left\langle x \in \mathbf{R} \middle| 0 < |x| < \frac{5}{3} \right\rangle$$

$$\left\{ x \in \mathbf{R} \middle| 0 < |x| < \frac{5}{3} \right\}$$

```

1 \[ \Bra{x\in\mathbf{R}} | 0<|x|<\frac{5}{3}} \]
2 \[ \Ket{x\in\mathbf{R}} | 0<|x|<\frac{5}{3}} \]
3 \[ \Braket{x\in\mathbf{R}} | 0<|x|<\frac{5}{3}} \]
4 \[ \Braket{x\in\mathbf{R}} | 0<\vert x\vert <\frac{5}{3}} \]
5 \[ \Set{x\in\mathbf{R}} | 0<|x|<\frac{5}{3}} \]
```

The difference between the `\Set` and the `\Braket` macro is the handling of the vertical lines. In `\Set` only the first one gets the same size as the braces and in `\Braket` all.

$$\left\langle \phi \middle| \frac{\partial^2}{\partial t^2} \middle| \psi \right\rangle$$

$$\left\{ \phi \middle| \frac{\partial^2}{\partial t^2} \middle| \psi \right\}$$

```

1 \[ \Braket{\phi | \frac{\partial^2}{\partial t^2} | \psi} \]
2 \[ \Set{\phi | \frac{\partial^2}{\partial t^2} | \psi} \]
```

`\Bra` and `\Ket` do nothing with the inner vertical lines.

53 cancel

This is a nice package for canceling anything in mathmode with a slash, backslash or a X. To get a horizontal line we can define an additional macro called `hcancel` with an optional argument for the line color (requires package `color`):

```

1 \newcommand\hcancel[2][black]{\setbox0=\hbox{#2}%
2 \rlap{\raisebox{.45\ht0}{\textcolor{#1}{\rule{\wd0}{1pt}}}}#2}
```

It is no problem to redefine the `cancel` macros to get also colored lines. A horizontal line for single characters is also described in section 14 on page 32.

$$\backslash\text{cancel}: f(x) = \frac{(x^2 + 1) \cancel{(x-1)}}{\cancel{(x-1)}(x+1)}$$

`\bcancel: 3 1234567`

`\xcancel: 3 1234567`

`\hcancel: 3 1234567`

```
1 $f(x)=\dfrac{\left(x^2+1\right)\cancel{(x-1)}}{\cancel{(x-1)}(x+1)}$\[0.5cm]
2 $\bcancel{3}\quad\bcancel{1234567}$$[0.5cm]
3 $\xcancel{3}\quad\xcancel{1234567}$$[0.5cm]
4 $\hcancel{3}\quad\hcancel[red]{1234567}$$
```

54 delarray

Package `delarray.sty`²⁸ supports different delimiters which are defined together with the beginning of an array:

```
1 \begin{array}<delLeft>{cc}<delRight>
2 ...
```

defines an array with two centered columns and the delimiters “<delLeft><delRight>”, e.g. “()”.

```
1 \[
2 A=\begin{array}({cc})
3   a & b \\
4   c & d \\
5 \end{array}
6 \]
```

$$A = \begin{pmatrix} a & b \\ c & d \end{pmatrix}$$

`delarray.sty` expects a pair of delimiters. If you need only one (like the cases structure) then use the dot for an “empty” delimiter, e.g.

```
1 \[
2 A=\begin{array}\{{cc}\.
3   a & b \\
4   c & d \\
5 \end{array}
6 \]
```

$$A = \begin{cases} a & b \\ c & d \end{cases}$$

which is a useful command for a cases structure without the \mathcal{AMS} package, which is described in the \mathcal{AMS} part.

²⁸[CTAN://macros/latex/required/tools/delarray.dtx](http://ctan.org/macros/latex/required/tools/delarray.dtx)

55 empheq

This package supports different frames for math environments of the $\mathcal{A}\mathcal{M}\mathcal{S}$ math package. It doesn't support all the environments from standard L^AT_EX which are not modified by $\mathcal{A}\mathcal{M}\mathcal{S}$ math, e.g. `eqnarray`.

With the optional argument of the environment `empheq` the preferred box type can be specified. A simple one is `\fbox`

$$f(x) = \int_1^{\infty} \frac{1}{x^2} dt = 1 \quad (55.1)$$

```

1 \begin{empheq}[box=\fbox]{align}
2 f(x)=\int_1^{\infty}\frac{1}{x^2}\,dt=1
3 \end{empheq}

```

The same is possible with the macro `\colorbox`:

$$f(x) = \int_1^{\infty} \frac{1}{x^2} dt = 1 \quad (55.2)$$

```

1 \begin{empheq}[box={\fboxsep=10pt\colorbox{yellow}}]{align}
2 f(x)=\int_1^{\infty}\frac{1}{x^2}\,dt=1
3 \end{empheq}

```

The key `box` can hold any possible L^AT_EX command sequence. Boxing subequations is also no problem, the `empheq` environment works in the same way:

$$f(x) = \int_1^{\infty} \frac{1}{x^1} dt = 1 \quad (55.3a)$$

$$f(x) = \int_2^{\infty} \frac{1}{x^2} dt = 0.25 \quad (55.3b)$$

```

1 \begin{subequations}
2 \begin{empheq}[box={\fboxsep=10pt\colorbox{cyan}}]{align}
3 f(x) &= \int_1^{\infty}\frac{1}{x^2}\,dt=1\backslash
4 f(x) &= \int_2^{\infty}\frac{1}{x^2}\,dt=0.25
5 \end{empheq}
6 \end{subequations}

```

For more information on `empheq` have a look at the documentation of the package which is available at any CTAN server.

56 `esint`

This is a very useful package when you want nice double or triple integral or curve integral symbols. The ones from `wasysym`²⁹ are not the best. `esint`³⁰ supports the following symbols:

$$\backslash\mathrm{int} : \int \quad (56.1)$$

$$\backslash\mathrm{iint} : \iint \quad (56.2)$$

$$\backslash\mathrm{iiintop} : \iiint \quad (56.3)$$

$$\backslash\mathrm{iiiintop} : \iiiii \quad (56.4)$$

$$\backslash\mathrm{dotsintop} : \int \cdots \int \quad (56.5)$$

$$\backslash\mathrm{ointop} : \oint \quad (56.6)$$

$$\backslash\mathrm{oiint} : \oiint \quad (56.7)$$

$$\backslash\mathrm{sqint} : \int \square \quad (56.8)$$

$$\backslash\mathrm{sqiint} : \iint \square \quad (56.9)$$

$$\backslash\mathrm{ointctrackwise} : \oint \quad (56.10)$$

$$\backslash\mathrm{ointclockwise} : \oint \quad (56.11)$$

$$\backslash\mathrm{varointclockwise} : \oint \quad (56.12)$$

$$\backslash\mathrm{varointctrackwise} : \oint \quad (56.13)$$

$$\backslash\mathrm{fint} : \int \quad (56.14)$$

$$\backslash\mathrm{varoiint} : \oiint \quad (56.15)$$

$$\backslash\mathrm{landupint} : \int \quad (56.16)$$

$$\backslash\mathrm{landdownint} : \int \quad (56.17)$$

²⁹CTAN://macros/latex/contrib/wasysym/

³⁰CTAN://macros/latex/contrib/esint/ CTAN://fonts/ps-type1/esint/

57 eucal and euscript.sty

These packages should be part of your local T_EX installation, because they come with the $\mathcal{A}\mathcal{M}\mathcal{S}$ math packages. Otherwise get them from CTAN³¹. They support a scriptwriting of only uppercase letters:

```
\mathscr{...} ABCDEFGHIJKLMNOPQRSTUVWXYZ
```

Read the documentation for the interdependence to the `\mathcal` command. For the above example the package `eucal.sty` was loaded with the option `mathscr`.

58 exscale

The following formula is written with the default fontsize where everything looks more or less well:

$$\int_{-1}^{+1} \frac{f(x)}{\sqrt{1-x^2}} dx \approx \frac{\pi}{n} \sum_{i=1}^n f\left(\cos\left(\frac{2i-1}{2n}\right)\right)$$

Writing the same with the fontsize `\huge` gives a surprising result, which belongs to the historical development of L^AT_EX, the `int` and `sum` symbols are not stretched. This extreme fontsize is often needed for slides and not only written “just for fun”.

$$\int_{-1}^{+1} \frac{f(x)}{\sqrt{1-x^2}} dx \approx \frac{\pi}{n} \sum_{i=1}^n f\left(\cos\left(\frac{2i-1}{2n}\right)\right)$$

Using the `exscale.sty`³² package, which should be part of any local T_EX installation, all symbols get the right size.

$$\int_{-1}^{+1} \frac{f(x)}{\sqrt{1-x^2}} dx \approx \frac{\pi}{n} \sum_{i=1}^n f\left(\cos\left(\frac{2i-1}{2n}\right)\right)$$

³¹CTAN://fonts/amsfonts/latex/euscript.sty

³²CTAN://macros/latex/base/

59 relsize

Often consecutives math operators are used, like two sum symbols, e.g.:

$$\sum_{i=1}^n \sum_{i=1}^n i^2$$

As seen the sums are of the same size. To increase the first operator size, someone can use the `\scalebox` macro from `graphicx` and write an own macro `\Sum`, e.g.:

```
1 \def\Sum{\ensuremath\mathop{\scalebox{1.2}{\displaystyle\sum}}
2 \[ \Sum_{j=1}\sum_{i=1}^{\infty} i \]
```

$$\sum_{j=1}^{\infty} \sum_{i=1}^{\infty} i$$

Another solution is to use the `relsize`³³ package together with the `exscale` one. `relsize` defines a useful macro `mathlarger`:

$$\sum_{i=1}^n \sum_{i=1}^n i^2$$

```
1 \[ \mathlarger{\sum}\sum_{i=1}^n
   i^2 \]
```

60 xypic

The `xymatrix` macro is part of the `xypic` package³⁴ which can be loaded with several options which are not so important.³⁵

$$\begin{array}{ccccc} A & & B & & C \\ \downarrow & \searrow & & & \\ D & \cdots & E & \rightsquigarrow & F \\ & & & \nearrow & \\ G & & H & & I \end{array} \quad (60.1)$$

This matrix was created with

```
1 \[
2 \xymatrix{ A\POS [] ;[d]**\dir {\sim},[] ;[dr]**\dir {-} & B & C\\
3 D & E\POS [] ;[l]**\dir {.},[] ;[r]**\dir {\sim} & F\POS [] ;[dl]**\dir {\sim} \\ }
```

³³CTAN://macros/latex/ltxmisc/

³⁴CTAN://macros/generic/diagrams/xypic/xy-3.7/

³⁵For more information look at the style file `xy.sty`, which is often saved in `/usr/share/texmf/tex/generic`

```
4 G & H & I }  
5 \]
```

Part V

Special symbols

In this section only those symbols are defined, which are not part of the list of all available symbols: CTAN://info/symbols/comprehensive/symbols-a4.pdf. With `fontmath.ltx` L^AT_EX itself defines the following special symbols for using inside math:

Name	Meaning
<code>\mathparagraph</code>	¶
<code>\mathsection</code>	§
<code>\mathdollar</code>	\$
<code>\mathsterling</code>	£
<code>\mathunderscore</code>	-
<code>\mathellipsis</code>	...

Table 21: Predefined math symbols from `fontmath.ltx`

61 Integral symbols

Name	Symbol
<code>\dashint</code>	\int
<code>\ddashint</code>	\int
<code>\clockint</code>	\oint
<code>\counterint</code>	\oint

For all new integral symbols limits can be used in the usual way:

$$\int_0^1 1 = \int_1^0 0 < \int_{-\infty}^{\infty} = \oint \oint_A \quad (61.1)$$

```
1 \ddashint_01=\dashint_10<\oint\limits_{-\infty}^{\infty} = \
   clockint\counterint_A
```

Put the following definitions into the preamble to use one or all of these new integral symbols.

```
1 \def\Xint#1{\mathchoice
2   {\XXint\displaystyle\textstyle{#1}}%
3   {\XXint\textstyle\scriptstyle{#1}}%
4   {\XXint\scriptstyle\scriptscriptstyle{#1}}%
5   {\XXint\scriptscriptstyle\scriptscriptstyle{#1}}%
6   \!\int}
7 \def\XXint#1#2#3{\setbox0=\hbox{#1{#2#3}{\int}$}
8   \vcenter{\hbox{#2#3}}\kern-.5\wd0}}
```

```

9 \def\ddashint{\Xint=}
10 \def\dashint{\Xint-}
11 \def\clockint{\Xint\circlearrowright} % GOOD!
12 \def\counterint{\Xint\rotcirclearrowleft} % Good for Computer
    Modern!
13 \def\rotcirclearrowleft{\mathpalette{\RotLSymbol{-30}}\
    circlearrowleft}
14 \def\RotLSymbol#1#2#3{\rotatebox[origin=c]{#1}{\$#2#3$}}

```

62 Harpoons

L^AT_EX knows no stretchable harpoon symbols, like `\xrightarrow`. The following code defines several harpoon symbols.

```

1 \def\rightharpoondownfill@{%
2 \arrowfill@{\relbar\relbar\rightharpoondown}
3 \def\rightharpoonupfill@{%
4 \arrowfill@{\relbar\relbar\rightharpoonup}
5 \def\leftharpoondownfill@{%
6 \arrowfill@{\leftharpoondown\relbar\relbar}
7 \def\leftharpoonupfill@{%
8 \arrowfill@{\leftharpoonup\relbar\relbar}
9 \newcommand{\xrightarrow}[2][\%
10 \ext@arrow 0359\rightharpoondownfill@{#1}{#2}}
11 \newcommand{\xrightharpoonup}[2][\%
12 \ext@arrow 0359\rightharpoonupfill@{#1}{#2}}
13 \newcommand{\xleftharpoondown}[2][\%
14 \ext@arrow 3095\leftharpoondownfill@{#1}{#2}}
15 \newcommand{\xleftharpoonup}[2][\%
16 \ext@arrow 3095\leftharpoonupfill@{#1}{#2}}
17 \newcommand{\xleftrightharpoons}[2][\mathrel{\%
18 \raise.22ex\hbox{\%
19 $\ext@arrow 3095\leftharpoonupfill@{\phantom{#1}}{#2}$}%
20 \setbox0=\hbox{\%
21 $\ext@arrow 0359\rightharpoondownfill@{#1}{\phantom{#2}}$}%
22 \kern-\wd0 \lower.22ex\box0}%
23 }
24 \newcommand{\xrightleftharpoons}[2][\mathrel{\%
25 \raise.22ex\hbox{\%
26 $\ext@arrow 3095\rightharpoonupfill@{\phantom{#1}}{#2}$}%
27 \setbox0=\hbox{\%
28 $\ext@arrow 0359\leftharpoondownfill@{#1}{\phantom{#2}}$}%
29 \kern-\wd0 \lower.22ex\box0}%
30 }

```

```

\xrightarrow
\xrightharpoondown
\xleftharpoondown
\xleftharpoonup
\xleftrightharpoons
\xrightleftharpoons

```

<code>\xrightarrow[under]{over}</code>	$\xrightarrow[under]{over}$
<code>\xleftarrow[under]{over}</code>	$\xleftarrow[under]{over}$
<code>\xrightarrow[under]{over}</code>	$\xrightarrow[under]{over}$
<code>\xleftarrow[under]{over}</code>	$\xleftarrow[under]{over}$
<code>\xleftrightarrow[under]{over}</code>	$\xleftrightarrow[under]{over}$
<code>\xleftrightarrow[under]{over}</code>	$\xleftrightarrow[under]{over}$

63 Bijective mapping arrow

To get something like \rightsquigarrow we can define:

```

1 \def\bijmap{%
2 \ensuremath{%
3 \mathrel{\rightarrowtail}\rightarrow}%
4 }%
5 }
```

This uses the `\mathrel` definition from section 35.2 on page 62. With this definition a huge symbol is also possible: $\Huge\bijmap \rightsquigarrow$.

64 Stacked equal sign

There are several symbols stacked with an equal sign, e.g. `\doteq`, `\equiv` or `\cong` (\doteq , \equiv , \cong). But there are still some missing, which are shown in table 22 and the following definitions.

<code>\eqdef</code>	$\stackrel{\text{def}}{=}$
<code>\eqexcl</code>	$\stackrel{!}{=}$
<code>\eqhat</code>	$\widehat{=}$

Table 22: New symbols in combination with the equal sign

```

1 \newcommand{\eqdef}{\ensuremath{\stackrel{\text{def}}{=}}}
2 \newcommand{\eqexcl}{\ensuremath{\stackrel{!}{=}}}
3 \newcommand{\eqhat}{\ensuremath{\widehat{=}}}
```

65 Other symbols

```

1 \newcommand*{\threesim}{%
2   \mathrel{\vcenter{\offinterlineskip
3     \hbox{$\sim$}\vskip-.35ex\hbox{$\sim$}\vskip-.35ex\hbox{$\sim$}}}
4 $\threesim ABC$

```

 $\approx ABC$

Part VI

Examples

66 Matrix

66.1 Identity matrix

There are several possibilities to write this matrix. Here is a solution with the default array environment.

$$\begin{pmatrix} 1 & & & & \\ & 1 & & & \\ & & 1 & & \\ & 0 & & 1 & \\ & & & & 1 \end{pmatrix}$$

```

1 \[
2 \left(\begin{array}{ccccc}
3 1\\
4 & 1 & & & \\
5 & & 1 & & \\
6 & & & 1 & \\
7 & & & & 1\end{array}\right)
8 \]
```

66.2 System of linear equations

$$\begin{array}{rclclcl} y_1 & = & x_{11} & + & x_{12} & + & x_{13} & + & \dots & + & x_{1(n-1)} & + & x_{1n} \\ y_2 & = & x_{21} & + & x_{22} & + & x_{23} & + & \dots & + & x_{2(n-1)} & + & x_{2n} \\ \vdots & = & \vdots & + & \vdots & + & \vdots & + & \vdots & + & \vdots & + & \vdots \\ y_{n-1} & = & x_{(n-1)1} & + & x_{(n-1)2} & + & x_{(n-1)3} & + & \dots & + & x_{(n-1)(n-1)} & + & x_{(n-1)n} \\ y_n & = & x_{n1} & + & x_{n2} & + & x_{n3} & + & \dots & + & x_{(n-1)(n-1)} & + & x_{nn} \end{array}$$

```

1 \[
2 \begin{array}{l}
3 y_1 & & x_{11} & & x_{12} & & x_{13} & & \dots & & x_{1(n-1)} & & x_{1n} \\
4 y_2 & & x_{21} & & x_{22} & & x_{23} & & \dots & & x_{2(n-1)} & & x_{2n} \\
5 \vdots & & \vdots & & \vdots & & \vdots & & \vdots & & \vdots & & \vdots \\
6 y_{n-1} & & x_{(n-1)1} & & x_{(n-1)2} & & x_{(n-1)3} & & \dots & & x_{(n-1)(n-1)} & & x_{(n-1)n} \\
7 y_n & & x_{n1} & & x_{n2} & & x_{n3} & & \dots & & x_{(n-1)(n-1)} & & x_{nn} \\
8 \end{array}
9 \]
```

67 Cases structure

Sometimes it is better to use the array environment instead of amsmath's cases environment. To get optimal horizontal spacing for the conditions, there are two matrixes in series, one 3×1 followed by 3×3 matrix. To minimize the horizontal space around the variable z a

```
1 \addtolength{\arraycolsep}{-3pt}
```

is a useful command.

$$I(z) = \delta_0 \begin{cases} D + z & -D \leq z \leq -p \\ D - \frac{1}{2} \left(p - \frac{z^2}{p} \right) & -p \leq z \leq p \\ D - z & p \leq z \leq D \end{cases} \quad (67.1)$$

```
1 \addtolength{\arraycolsep}{-3pt}
2 I(z)=\delta_{0}\left\{\%
3 \begin{array}{lcrcl}
4 D+z & \& \quad & \& -D & \& \leq & z & \leq & -p \\
5 D-\frac{1}{2}\left(p-\frac{z^2}{p}\right) & \& \quad & \& -p & \& \leq & z & \leq & p \\
6 & \& \quad & \& -p & \& \leq & z & \leq & p \\
7 D-z & \& \quad & \& p & \& \leq & z & \leq & D \\
8 \end{array}\right\}.
9 \end{equation}
```

The `\phantom` command replaces exactly that place with whitespace which the argument needs.

67.1 Cases with numbered lines

This is not possible in an easy way, because `cases` uses the `array` environment for typesetting which has by default no numbering. However, there are some tricky ways to get numbered lines. The following three examples use the `tabular`, the `tabularx` and the `array` environment.

$$\text{some text here} \begin{cases} x = 2 & \text{if } y > 2 \\ x = 3 & \text{if } y \leq 2 \end{cases} \quad (67.2)$$

$$(67.3)$$

```
1 \begin{tabular}{rc}
2 \ldelim\{{2}\{2.75cm}[some text here] & \quad \quad \quad \color{red}{\text{Martin}}
3 \quad \quad \quad \color{red}{\text{-----}}
4 \quad \quad \quad \color{blue}{\parbox{\linewidth-3cm-4\tabcolsep}}{
5 \quad \quad \quad \color{blue}{\vspace*{1ex}}
6 \quad \quad \quad \color{blue}{\begin{flalign}
7 \quad \quad \quad x \&= 2\color{blue}{\quad}\text{if } y > 2 \&\& \\
8 \quad \quad \quad x \&= 3\color{blue}{\quad}\text{if } y \leq 2 \&\& \\
9 \quad \quad \quad \color{blue}{\end{flalign}}
\color{blue}{\end{tabular}}
```

$$\text{some text here} \begin{cases} x = 2 & \text{if } y > 2 \\ x = 3 & \text{if } y \leq 2 \end{cases} \quad (67.4)$$

$$(67.5)$$

```

1 \begin{tabularx}{\linewidth}{rXc}
2 \ldelim\{{2}{2.75cm}[some text here]      %%% ----- Martin
   -----
3 & $ x = 2\quad\text{if } y > 2 $ & \refstepcounter{equation}
   \\\theequation\\
4 & $ x = 3\quad\text{if } y \le 2 $ & \refstepcounter{equation}
   \\\theequation\\
5 \end{tabularx}

```

$$\text{some text here} \begin{cases} x = 2 & \text{if } y > 2 & (67.6) \\ x = 3 & \text{if } y \leq 2 & (67.7) \end{cases}$$

```

1 \[
2 \begin{array}{rc@{\quad}c}
3 \ldelim\{{2}{2.75cm}[some text here]      %%% ----- Martin
   -----
4 & x = 2\quad\text{if } y > 2 & \refstepcounter{equation}(\
   \theequation)\\
5 & x = 3\quad\text{if } y \le 2 & \refstepcounter{equation}(\
   \theequation)\\
6 \end{array}
7 \]

```

68 Arrays

There is a general rule that a lot of mathematical stuff should be divided in smaller pieces. But sometimes it is difficult to get a nice horizontal alignment when splitting a formula. The following ones uses the `array` environment to get a proper alignment.

68.1 Quadratic equation

$$\begin{aligned}
y &= x^2 + bx + c \\
&= x^2 + 2 \cdot \frac{b}{2}x + c \\
&= \underbrace{x^2 + 2 \cdot \frac{b}{2}x + \left(\frac{b}{2}\right)^2}_{\left(x + \frac{b}{2}\right)^2} - \left(\frac{b}{2}\right)^2 + c \\
&= \left(x + \frac{b}{2}\right)^2 - \left(\frac{b}{2}\right)^2 + c \quad \left| + \left(\frac{b}{2}\right)^2 - c \right. \\
y + \left(\frac{b}{2}\right)^2 - c &= \left(x + \frac{b}{2}\right)^2 \quad |(\text{Scheitelpunktform}) \\
y - y_S &= (x - x_S)^2 \\
S(x_S; y_S) \quad \text{bzw.} \quad S\left(-\frac{b}{2}; \left(\frac{b}{2}\right)^2 - c\right)
\end{aligned}$$

(68.1)

```

1 \begin{equation}
2 \begin{array}{rcll}
3 y & = & x^2 + bx + c \\
4 & = & x^2 + 2 \cdot \displaystyle \frac{b}{2} x + c \\
5 & = & \underbrace{x^2 + 2 \cdot \displaystyle \frac{b}{2} x + \left(\frac{b}{2}\right)^2}_{\left(x + \frac{b}{2}\right)^2} - \displaystyle \frac{b^2}{4} + c \\
6 & = & \left(x + \frac{b}{2}\right)^2 - \left(\frac{b}{2}\right)^2 + c & \left| + \left(\frac{b}{2}\right)^2 - c \right. \\
7 & & & |(\text{Scheitelpunktform}) \\
8 y + \left(\frac{b}{2}\right)^2 - c & = & \left(x + \frac{b}{2}\right)^2 \\
9 y - y_S & = & (x - x_S)^2 \\
10 S(x_S; y_S) & \text{bzw.} & S\left(-\frac{b}{2}; \left(\frac{b}{2}\right)^2 - c\right)
11 \end{array}
12 \end{equation}

```

68.2 Vectors and matrices

$$\underline{RS} = \begin{pmatrix} 01 & a4 & 55 & 87 & 5a & 58 & db & 9e \\ a4 & 56 & 82 & f3 & 1e & c6 & 68 & e5 \\ 02 & a1 & fc & c1 & 47 & ae & 3d & 19 \\ a4 & 55 & 87 & 5a & 58 & db & 9e & 03 \end{pmatrix}$$

$$\begin{pmatrix} s_{i,0} \\ s_{i,1} \\ s_{i,2} \\ s_{i,3} \end{pmatrix} = \underline{RS} \cdot \begin{pmatrix} m_{8i+0} \\ m_{8i+1} \\ \dots \\ m_{8i+6} \\ m_{8i+7} \end{pmatrix} \quad (68.2)$$

$$S_i = \sum_{j=0}^3 s_{i,j} \cdot 2^{8j} \quad i = 0, 1, \dots, k-1$$

$$S = (S_{k-1}, S_{k-2}, \dots, S_1, S_0)$$

```

1 \begin{equation}
2 \begin{array}{rccl}
3 \underline{RS} & = & \left( \begin{array}{cccccc}
4 01 & a4 & 55 & 87 & 5a & 58 & db & 9e \\
5 a4 & 56 & 82 & f3 & 1e & c6 & 68 & e5 \\
6 02 & a1 & fc & c1 & 47 & ae & 3d & 19 \\
7 a4 & 55 & 87 & 5a & 58 & db & 9e & 03 \end{array} \right) \\
8 \\
9 \left( \begin{array}{c}
10 s_{i,0} \\
11 s_{i,1} \\
12 s_{i,2} \\
13 s_{i,3} \end{array} \right) & = & \underline{RS} \cdot \begin{pmatrix}
14 m_{8i+0} \\
15 m_{8i+1} \\
16 \dots \\
17 m_{8i+6} \\
18 m_{8i+7} \end{pmatrix} \\
19 \\
20 S_i & = & \sum_{j=0}^3 s_{i,j} \cdot 2^{8j} \quad i=0,1,\dots, \\
21 & & k-1 \\
22 \\
23 S & = & \left( S_{k-1}, S_{k-2}, \dots, S_1, S_0 \right) \\
24 \\
25 \end{array} \\
26 \end{equation}
27
```

68.3 Cases with (eqn)array environment

This solution is important when $\mathcal{A}\mathcal{M}\mathcal{S}$ math can't be used.

$$\lim_{n \rightarrow \infty} q^n = \begin{cases} \text{divergent} & q \leq -1 \\ 0 & |q| < 1 \\ 1 & q = 1 \\ \infty & q > 1 \end{cases}$$

```

1 $\lim\limits_{n \rightarrow \infty} q^n = \left\{ \begin{array}{ll} \text{divergent} & q \leq -1 \\ 0 & |q| < 1 \\ 1 & q = 1 \\ \infty & q > 1 \end{array} \right.
2 \begin{array}{ll} \text{divergent} & q \leq -1 \\ 0 & |q| < 1 \\ 1 & q = 1 \\ \infty & q > 1 \end{array}
3 \end{array} \right.
4
5
6
7

```

68.4 Arrays inside arrays

The array environment is a powerful one because it can be nested in several ways:

$$\left(\begin{array}{cc|ccc|cc} a_{11} & a_{12} & & 0 & & 0 \\ a_{21} & a_{22} & & & & \\ \hline & & b_{11} & b_{12} & b_{13} & \\ & 0 & b_{21} & b_{22} & b_{23} & 0 \\ & & b_{31} & b_{32} & b_{33} & \\ \hline & 0 & & 0 & & \begin{array}{cc} c_{11} & c_{12} \\ c_{21} & c_{22} \end{array} \end{array} \right)$$

```

1 \[
2 \left(
3 \begin{array}{cc|ccc|cc}
4 a_{11} & a_{12} & & 0 & & 0 \\
5 a_{21} & a_{22} & & & & \\
6 \hline
7 & & b_{11} & b_{12} & b_{13} & \\
8 & 0 & b_{21} & b_{22} & b_{23} & 0 \\
9 & & b_{31} & b_{32} & b_{33} & \\
10 \hline
11 & 0 & & 0 & & \begin{array}{cc} c_{11} & c_{12} \\ c_{21} & c_{22} \end{array}
12 \end{array}
13 \right)
14 \]
15
16
17
18
19
20
21

```

$$Y^1 = \frac{\begin{bmatrix} 0 & 0 & 1 & 0 \\ 1 & 0 & 1 & 0 \\ 1 & 1 & 1 & 1 \end{bmatrix}}{\begin{matrix} 2 & 1 & 3 & 1 \end{matrix}}$$

```

1 \[
2 Y^1=
3 \begin{array}{c}
4 \null\[\[1ex] % only vor vertical alignment
5 \left[\begin{array}{rrrr}
6 0 & 0 & 1 & 0 \\
7 1 & 0 & 1 & 0 \\
8 1 & 1 & 1 & 1
9 \end{array}\right]\[\[3ex]\hline
10 \begin{array}{rrrr}
11 % \hdotsfor{4} \[\[ ( needs \AmSmath) instead of \[\[3ex]\hline
12 2 & 1 & 3 & 1
13 \end{array}
14 \end{array}
15 \]
```

68.5 Colored cells

In general there is no difference in coloring tabular or array cells. The following example shows how one can put colors in rows, columns and cells.

2	$h_{k,1,0}(n)$	$h_{k,1,1}(n)$	$h_{k,1,2}(n)$	0	0	3
	$h_{k,2,0}(n)$	$h_{k,2,1}(n)$	$h_{k,2,2}(n)$	0	0	
	$h_{k,3,0}(n)$	$h_{k,3,1}(n)$	$h_{k,3,2}(n)$	0	0	
	$h_{k,4,0}(n)$	$h_{k,4,1}(n)$	$h_{k,4,2}(n)$	0	0	
	0	$h_{k,1,0}(n-1)$	$h_{k,1,1}(n-1)$	$h_{k,1,2}(n-1)$	0	
	0	$h_{k,2,0}(n-1)$	$h_{k,2,1}(n-1)$	$h_{k,2,2}(n-1)$	0	
	0	$h_{k,3,0}(n-1)$	$h_{k,3,1}(n-1)$	$h_{k,3,2}(n-1)$	0	
	0	$h_{k,4,0}(n-1)$	$h_{k,4,1}(n-1)$	$h_{k,4,2}(n-1)$	0	
	0	0	$h_{k,1,0}(n-2)$	$h_{k,1,1}(n-2)$	$h_{k,1,2}(n-2)$	
	0	0	$h_{k,2,0}(n-2)$	$h_{k,2,1}(n-2)$	$h_{k,2,2}(n-2)$	
	0	0	$h_{k,3,0}(n-2)$	$h_{k,3,1}(n-2)$	$h_{k,3,2}(n-2)$	
	0	0	$h_{k,4,0}(n-2)$	$h_{k,4,1}(n-2)$	$h_{k,4,2}(n-2)$	
4	12x5					

12×5

```

1 ...
2 \usepackage{array}
3 \usepackage{colortbl}
4 \definecolor{umbra}{rgb}{0.8,0.8,0.5}
5 \def\zero{\multicolumn{1}{>{\columncolor{white}}c}{0}}
```

```

6 \def\colCell#1#2{\multicolumn{1}{>{\columncolor{#1}}c}{#2}}
7 \begin{document}
8 \[ \left[ \left[ \right.
9 \begin{array}{*{5}{>{\columncolor{gray}{0.95}}c}}
10 h_{k,1,0}(n) & h_{k,1,1}(n) & h_{k,1,2}(n) & \text{\texttt{\textbackslash zero}} & \text{\texttt{\textbackslash zero}} \\
11 h_{k,2,0}(n) & h_{k,2,1}(n) & h_{k,2,2}(n) & \text{\texttt{\textbackslash zero}} & \text{\texttt{\textbackslash zero}} \\
12 h_{k,3,0}(n) & h_{k,3,1}(n) & h_{k,3,2}(n) & \text{\texttt{\textbackslash zero}} & \text{\texttt{\textbackslash zero}} \\
13 h_{k,4,0}(n) & \colCell{umbra}{h_{k,4,1}(n)} & h_{k,4,2}(n) & \text{\texttt{\textbackslash zero}} & \text{\texttt{\textbackslash zero}} \\
14 \text{\texttt{\textbackslash zero}} & h_{k,1,0}(n-1) & h_{k,1,1}(n-1) & h_{k,1,2}(n-1) & \text{\texttt{\textbackslash zero}} \\
15 \text{\texttt{\textbackslash zero}} & h_{k,2,0}(n-1) & h_{k,2,1}(n-1) & h_{k,2,2}(n-1) & \text{\texttt{\textbackslash zero}} \\
16 \text{\texttt{\textbackslash zero}} & h_{k,3,0}(n-1) & h_{k,3,1}(n-1) & h_{k,3,2}(n-1) & \text{\texttt{\textbackslash zero}} \\
17 \text{\texttt{\textbackslash zero}} & \colCell{umbra}{h_{k,4,0}(n-1)} & h_{k,4,1}(n-1) & h_{k,4,2}(n-1) & \text{\texttt{\textbackslash zero}} \\
18 \text{\texttt{\textbackslash zero}} & \text{\texttt{\textbackslash zero}} & h_{k,1,0}(n-2) & h_{k,1,1}(n-2) & h_{k,1,2}(n-2) \\
19 \text{\texttt{\textbackslash zero}} & \text{\texttt{\textbackslash zero}} & h_{k,2,0}(n-2) & h_{k,2,1}(n-2) & h_{k,2,2}(n-2) \\
20 \text{\texttt{\textbackslash zero}} & \text{\texttt{\textbackslash zero}} & h_{k,3,0}(n-2) & h_{k,3,1}(n-2) & h_{k,3,2}(n-2) \\
21 \text{\texttt{\textbackslash zero}} & \text{\texttt{\textbackslash zero}} & h_{k,4,0}(n-2) & h_{k,4,1}(n-2) & h_{k,4,2}(n-2) \\
22 \end{array} \right. \right] \text{\texttt{\textbackslash right}}_{12 \text{\texttt{\textbackslash times}} 5} \\
23 \dots

```

69 Over- and underbraces

69.1 Braces and roots

To put an underbrace in a root without enlarging the root symbol is possible with the `\makebox` macro:

$$z = \underbrace{\sqrt{x^2 + y^2}}_{=z^2}$$

```

1 \[
2 z = \sqrt{\underbrace{x^2 + y^2}_{=z^2}}
3 \makebox[\widthof{\sqrt{x^2 + y^2}}]{\text{\texttt{\textbackslash sqrt{x^2 + y^2}}}}_{=z^2}
4 \]
5

```

69.2 Overlapping braces

Overlapping under- and overbraces like $\underbrace{\overbrace{\phantom{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2}}^{=0}}_{u1} \quad \underbrace{\phantom{\left(\frac{3}{4}\right)^2 + \frac{5}{2}}}_{u2}$ needs some

tricky code, because we cannot have parts of the argument inside `overbrace` and also `underbrace`. The following equation 69.1 is an example for such a construction:

$$\begin{aligned}
 y &= 2x^2 - 3x + 5 \\
 &= 2 \left(\underbrace{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2}_{=0} - \underbrace{\left(\frac{3}{4}\right)^2 + \frac{5}{2}}_{} \right) \\
 &= 2 \left(\left(x - \frac{3}{4}\right)^2 + \frac{31}{16} \right) \\
 y - \frac{31}{8} &= 2 \left(x - \frac{3}{4}\right)^2
 \end{aligned} \tag{69.1}$$

```

1 \begin{align}\label{eq:pqFormel}
2 y &= 2x^2 - 3x + 5\nonumber\\
3 &\quad \textcolor{blue}{\hphantom{= 2\left(\textcolor{red}{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2} - \left(\frac{3}{4}\right)^2 + \frac{5}{2}\right)}} \\
4 &\quad \textcolor{blue}{\overbrace{\hphantom{= 2\left(\textcolor{red}{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2} - \left(\frac{3}{4}\right)^2 + \frac{5}{2}\right)}}^{=0}} \\
5 &\quad \textcolor{blue}{\phantom{= 2\left(\textcolor{red}{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2} - \left(\frac{3}{4}\right)^2 + \frac{5}{2}\right)}} \\
6 &\quad \textcolor{blue}{\left(\textcolor{red}{x - \frac{3}{4}}\right)^2 + \frac{31}{16}} \\
7 &= 2\left(\textcolor{red}{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2} - \left(\frac{3}{4}\right)^2 + \frac{5}{2}\right) \\
8 &\quad \textcolor{red}{\underbrace{\phantom{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2}}_{=0}} \\
9 &\quad \textcolor{red}{\phantom{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2}} \\
10 &\quad \textcolor{red}{\phantom{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2}} \\
11 &\quad \textcolor{red}{\phantom{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2}} \\
12 &\quad \textcolor{red}{\phantom{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2}} \\
13 &\quad \textcolor{red}{\phantom{x^2 - \frac{3}{2}x + \left(\frac{3}{4}\right)^2}} \\
14 &= 2\left(\textcolor{red}{x - \frac{3}{4}}\right)^2 \\
15 &\quad \textcolor{blue}{\phantom{x - \frac{3}{4}}} \\
16 &\quad \textcolor{blue}{\phantom{x - \frac{3}{4}}} \\
17 &\quad \textcolor{cyan}{\phantom{x - \frac{3}{4}}} \\
18 \end{align}

```

69.3 Vertical alignment of different braces

When having several braces in one formula line, then it looks better when all braces are also on the same line, e.g.:

$$\begin{pmatrix} x_R \\ y_R \end{pmatrix} = \underbrace{r}_{\text{Scaling}} \cdot \underbrace{\begin{pmatrix} \sin \gamma & -\cos \gamma \\ \cos \gamma & \sin \gamma \end{pmatrix}}_{\text{Rotation}} \begin{pmatrix} x_K \\ y_K \end{pmatrix} + \underbrace{\begin{pmatrix} t_x \\ t_y \end{pmatrix}}_{\text{Translation}} \quad (69.2)$$

```

1 \begin{equation}
2 \binom{x_R}{y_R} = \underbrace{r\phantom{\binom{A}{B}}}_{\text{Scaling}} \cdot
3 \underbrace{\begin{pmatrix} \sin \gamma & -\cos \gamma \\ \cos \gamma & \sin \gamma \end{pmatrix}}_{\text{Rotation}}
4 \binom{x_K}{y_K} +
5 \underbrace{\begin{pmatrix} t_x \\ t_y \end{pmatrix}}_{\text{Translation}}
6 \end{equation}

```

It is again the `\vphantom` macro which reserves the needed vertical space. Nevertheless the horizontal space around the `r` of the first underbrace and the last `+` should be decreased to get a better typesetting. This is possible with `\hspace` or simply `\kern`:

$$\begin{pmatrix} x_R \\ y_R \end{pmatrix} = \underbrace{r}_{\text{Scaling}} \cdot \underbrace{\begin{pmatrix} \sin \gamma & -\cos \gamma \\ \cos \gamma & \sin \gamma \end{pmatrix}}_{\text{Rotation}} \begin{pmatrix} x_K \\ y_K \end{pmatrix} + \underbrace{\begin{pmatrix} t_x \\ t_y \end{pmatrix}}_{\text{Translation}}$$

```

1 \[ \binom{x_R}{y_R} = %
2 \kern-10pt\underbrace{r\phantom{\binom{A}{B}}}_{\text{Scaling}}\kern-10pt%
3 \cdot\underbrace{\begin{pmatrix} \sin \gamma & -\cos \gamma \\ \cos \gamma & \sin \gamma \end{pmatrix}}_{\text{Rotation}}
4 \binom{x_K}{y_K} +\kern-5pt%
5 \underbrace{\begin{pmatrix} t_x \\ t_y \end{pmatrix}}_{\text{Translation}} \]

```

69.4 Vertical and horizontal alignment

The forgoing example simply uses `\hspace` to decrease the horizontal width between two underbraces. This may be okay for a single solution, but in general it is better to have some code which works in any case.

The following example looks simple but it needs some tricky code to get vertical and horizontal alignment.

$$\begin{array}{ccccccc}
\frac{300}{5069} & \xrightarrow{\quad} & \frac{29}{490} & \xrightarrow{\quad} & \frac{19}{321} & \xrightarrow{\quad} & \frac{9}{152} & \xrightarrow{\quad} & \frac{8}{135} & \xrightarrow{\quad} & \dots & \xrightarrow{\quad} & \frac{1}{16} & \xrightarrow{\quad} & \dots & \xrightarrow{\quad} & \frac{1}{1} \\
\Delta a=271 & & \Delta a=10=\langle 271 \rangle_{29} & & & & & & \Delta a=1=\langle 10 \rangle_9 & & & & & \Delta a=0=\langle 1 \rangle_1 & & & & \\
\Delta b=4579 & & \Delta b=169=\langle 4579 \rangle_{490} & & & & & & \Delta b=17=\langle 169 \rangle_{152} & & & & & \Delta b=1=\langle 17 \rangle_{16} & & & & \\
1 \text{ iteration} & & 2 \text{ iterations} & & & & & & 8 \text{ iterations} & & & & & 8 \text{ iterations} & & & &
\end{array}$$

It uses the macro `\mathclap` defined in section 35.2 on page 62, which gives a better result. It is also possible to use `\makebox[0pt]{...}` but it works only in text mode and this needs some more `$...$`.

```

1 \def\num#1{\hphantom{#1}}
2 \def\vsp{\vphantom{\rangle_1}}
3
4 \begin{equation*}
5   \frac{300}{5069} %
6   \underbrace{\longmapsto \vphantom{\frac{1}{1}}}_{%
7     \mathclap{\substack{%
8       \Delta a=271\num{9}\vsp \ \ [2pt]
9       \Delta b=4579\vsp \ \ [2pt]
10      \text{$1$ iteration}%
11    }}} \frac{29}{490} %
12  \underbrace{\longmapsto \frac{19}{321} \longmapsto}_{%
13    \mathclap{\substack{%
14      \Delta a=10\num{9}=\rangle 271\rangle_{29}\num{20} \ \ [2pt]
15      \Delta b=169=\rangle 4579\rangle_{490} \ \ [2pt]
16      \text{$2$ iterations}%
17    }}} \frac{9}{152}
18  \underbrace{\longmapsto \frac{8}{135} \longmapsto \dots \longmapsto}_{%
19    \substack{%
20      \Delta a=1\num{7}=\rangle 10\rangle_{9}\num{119} \ \ [2pt]
21      \Delta b=17=\rangle 169\rangle_{152} \ \ [2pt]
22      \text{$8$ iterations}%
23    }} \frac{1}{16}
24  \underbrace{\longmapsto \dots \longmapsto \vphantom{\frac{8}{135}}}_{%
25    \substack{%
26      \Delta a=0=\rangle 1\rangle_{1}\num{76} \ \ [2pt]
27      \Delta b=1=\rangle 17\rangle_{16} \ \ [2pt]
28      \text{$8$ iterations}%
29    }} \frac{1}{1}
30 \end{equation*}

```

70 Integrals

The *first theorem of Green* is:

$$\iiint_{\mathcal{G}} [u \nabla^2 v + (\nabla u, \nabla v)] d^3 V = \oint_S u \frac{\partial v}{\partial n} d^2 A$$

The *second theorem of Green* is:

$$\iiint_{\mathcal{G}} [u \nabla^2 v - v \nabla^2 u] d^3 V = \oiint_S \left(u \frac{\partial v}{\partial n} - v \frac{\partial u}{\partial n} \right) d^2 A$$

They are both written with the `esint.sty` package³⁶, which gives nice integral symbols. The L^AT_EX code for the first equation is:

```

1 \[
2 \underset{\mathcal{G}}{\quad}\iiint\!%
3 \left[u\nabla^2v+\left(\nabla u,\nabla v\right)\right]d
4 =\underset{\mathcal{S}}{\quad}\oiint uQ\{v\}_nd^2A
5 \]
```

with the following definition in the preamble for the partial derivation:

```

1 \def\Q#1#2{\frac{\partial#1}{\partial #2}}
```

which makes things easier to write.

71 Vertical alignment

71.1 Example 1

Sometimes it may be useful to have a vertical alignment over the whole page with a mix of formulas and text. Section 37 shows the use of `\intertext`. There is another trick to get all formulas vertical aligned. Let's have the following formulas distributed over the whole page:

$$\begin{aligned} f(x) &= a \\ g(x) &= x^2 - 4x \\ f(x) - g(x) &= x^2 + x^3 + x \\ g &= x^2 + x^3 + x^4 + x^5 + b \end{aligned}$$

They all have a different length of the left and right side. Now we want to write some text and other objects between them, but let the alignment untouched. We choose the longest left and the longest right side and take them for scaling with the `\hphantom` command:

```
\hphantom{\mbox{\$f(x)-g(x)\$}} & \hphantom{\mbox{\$= x^2+x^3+x^4+x^5+b\$}}
```

This is the first (empty) line in every equation where now all other lines are aligned to this one. For example:

³⁶See section 70 on the previous page.

blah blah blah blah blah blah blah blah blah blah blah blah blah blah
 blah blah blah blah blah blah blah blah blah blah blah blah blah blah
 blah blah blah blah blah blah blah blah blah blah blah

$$f(x) = a \quad (71.1)$$

$$g(x) = x^2 - 4x \quad (71.2)$$

blah blah blah blah blah blah blah blah blah blah blah blah blah
 blah blah blah blah blah blah blah blah blah blah blah blah blah
 blah blah blah blah blah blah blah blah blah blah blah

$$f(x) - g(x) = x^2 + x^3 + x \quad (71.3)$$

blah blah blah blah blah blah blah blah blah blah blah blah blah
 blah blah blah blah blah blah blah blah blah blah blah blah blah
 blah blah blah blah blah blah blah blah blah blah

$$g(x) = x^2 + x^3 + x^4 + x^5 + b \quad (71.4)$$

blah blah blah blah blah blah blah blah blah blah blah blah blah
 blah blah blah blah blah blah blah blah blah blah blah blah blah
 blah blah blah blah blah blah blah blah blah

The phantom line is empty but leaves the vertical space for a line. This could be corrected with decreasing the `\abovedisplayshortskip` length and restoring them after the whole sequence of commands. The code of the above looks like:

```

1 \newcommand{\x}{blah blah blah blah blah blah blah }
2 \addtolength{\abovedisplayshortskip}{-1cm} % decrease the
   skip
3 \addtolength{\abovedisplayskip}{-1cm}
4 \x\x\x\x\x
5 \begin{align}
6 \hphantom{\mbox{$f(x)-g(x)$}} & \hphantom{\mbox{$= x^2+x^3+x$}}
   ^4+x^5+b$}}\nonumber\\
7 f(x) &= a\\
8 g(x) &= x^2-4x
9 \end{align}
10
11 \x\x\x\x\x
12 \begin{align}
13 \hphantom{\mbox{$f(x)-g(x)$}} & \hphantom{\mbox{$= x^2+x^3+x$}}
   ^4+x^5+b$}}\nonumber\\
14 f(x)-g(x) &= x^2+x^3+x
15 \end{align}
16 \x\x\x\x\x
17
```

```

18 \begin{align}
19 \hphantom{\mbox{$f(x)-g(x)$}} & \& \hphantom{\mbox{$= x^2+x^3+x^4+x^5+b$}} \nonumber \\
20 g(x) &= x^2+x^3+x^4+x^5+b \\
21 \end{align}
22 \x\x\x\x\x
23 % restore old values
24 \addtolength{\abovedisplayskip}{1cm}
25 \addtolength{\abovedisplayskip}{1cm}

```

Another case of aligning equations inside an itemize environment is the following one. With the `\makebox` macro one can have the same size on the left side of the equal sign to get a vertical alignment.

- first function

$$P_1 = \sum_a \in A$$

- but another one

$$\sin(P_1) = \text{blabla}$$

- or perhaps

$$P_3 + P_2 - P_1 = \text{blablu}$$

```

1 \newsavebox\lW
2 \sbox\lW{$P_{3}+P_{2}-P_{1}$}
3
4 \begin{itemize}
5 \item first function \\\
6   $\displaystyle\makebox[\wd\lW][r]{$P_1$}=\sum_a \in A$
7 \item but another one \\\
8   $\makebox[\wd\lW][r]{$\sin\left(P_1\right)$}=\text{blabla}$
9 \item or perhaps \\\
10  $P_{3}+P_{2}-P_{1}=\text{blablu}$
11 \end{itemize}

```

71.2 Example 2

This one comes from Hartmut Henkel and offers a special form of placing additional text between the equation and the equationnumber. This makes only sense when you load the documentclass with the option `fleqn`. The example places the additional text at `0.5\textwidth`, changing this value is no problem.

text text text text text text text text text text text text text text text text
 text text text text text text text text text text text text text text text text
 text text text text text text text text text text text text text text text text
 text text text text text

$$\varepsilon = \frac{E \cdot 4 \cdot \pi \cdot \varepsilon_0 \cdot a_0 \cdot \left(Z_i^{\frac{2}{3}} + Z_{Si}^{\frac{2}{3}} \right)^{-\frac{1}{2}}}{Z_i \cdot Z_{Si} \cdot e^2 \cdot \left(1 + \frac{m_i}{m_{Si}} \right)};$$

a_0	Bohrscher Radius (= 0,53 Å)	
e	Elementarladung	
N_{si}	Anzahl der Siliziumatome pro Einheitsvolumen	(71.5)
m	Atomgewicht	
Z	Kernladungszahl	

$$a^2 + b^2 = c^2 \qquad \qquad \qquad abc \qquad \qquad \qquad (71.6)$$

$$z = 9 \qquad \qquad \qquad (71.7)$$

text text text text text text text text text text text text text text text text
 text text text text text text text text text text text text text text text text
 text text text text text text text text text text text text text text text text
 text text text text text

This solution works only with $\mathcal{A}\mathcal{M}\mathcal{S}$ math, without you have to redefine the \LaTeX macro, which creates the equation number.

```

1 \newsavebox{\myendhook} % hier gehen die Tabellen rein
2 \def\tagform@#1{{\maketag@@@{\ignorespaces#1\unskip\
  @italiccorr}}
3 \makebox[0pt][r]{% hinter der Zeilennummer aufgehängt
4 \makebox[0.4\textwidth][l]{\usebox{\myendhook}}}%
5 }%
6 \global\sbox{\myendhook}{}% Box wird geleert
7 }}
8
9 [ ... ]
10
11 \sbox{\myendhook}{%
12 \begin{footnotesize}%
13 \begin{tabular}{@{}ll}
14 $a_0$ & Bohrscher Radius ($\mathrm{= 0{,}53\,AA}$)\
15 $e$ & Elementarladung\
16 $N_{si}$ & Anzahl der Siliziumatome\
17 & pro Einheitsvolumen\
18 $m$ & Atomgewicht\
19 $Z$ & Kernladungszahl
20 \end{tabular}
21 \end{footnotesize}}
22
23 \begin{equation}
```

```

24 \varepsilon = \frac{E \cdot 4 \cdot \pi \cdot \varepsilon_0}{
25 \cdot a_0 \cdot \left( Z_i^{\frac{2}{3}} + Z_{Si}^{\frac{
26 \right)^{-\frac{1}{2}}} \{Z_i \cdot Z_{Si} \cdot e^2 \cdot
    \left( 1
27 + \frac{m_i}{m_{Si}} \right)\},;
28 \end{equation}
29
30 \sbox{\myendhook}{abc}
31
32 \begin{equation}
33 a^2+b^2=c^2
34 \end{equation}
35
36 \begin{equation}
37 z = 9
38 \end{equation}

```

72 Node connections

This is a typical application for PSTricks and it needs the package `pst-node` and doesn't work with `pdflatex`. Use `VTeX`, `ps4pdf` or `ps2pdf`.

Die Bindungsenergie im Tröpfchenmodell setzt sich aus folgenden Teilen zusammen:

- dem Oberflächenanteil,
- dem Volumenanteil,

$$E = a_v A + \left(-a_f A^{2/3}\right) + \left(-a_c \frac{Z(Z-1)}{A^{1/3}}\right) + \left(-a_s \frac{(A-2Z)^2}{A}\right) + E_p \quad (1)$$

- dem Coulomb-Anteil,
- der Symmetrieenergie,
- sowie einem Paarbildungsbeitrag.

```

1 \psset{nodesep=3pt}
2 \definecolor{lila}{rgb}{0.6,0.2,0.5}
3 \definecolor{darkyellow}{rgb}{1,0.9,0}
4 Die Bindungsenergie im Tr"opfenmodell setzt sich aus
5 folgenden Teilen zusammen:
6 \begin{itemize}
7 \item dem \rnode{b}{Oberfl"achenanteil}
8 \item dem \rnode{a}{Volumenanteil},\,\,\,[1cm]

```

```

9 \def\xstrut{\vphantom{\frac{(A)^1}{(B)^1}}}
10 \begin{equation}
11 E =
12 \rnode[t]{ae}{\psframebox*[fillcolor=darkyellow,
13   linestyle=none]{\xstrut a_vA}} +
14 \rnode[t]{be}{\psframebox*[fillcolor=lightgray,
15   linestyle=none]{\xstrut -a_fA^{2/3}}} +
16 \rnode[t]{ce}{\psframebox*[fillcolor=green,
17   linestyle=none]{\xstrut -a_c\frac{Z(Z-1)}{A^{1/3}}}} +
18 \rnode[t]{de}{\psframebox*[fillcolor=cyan,
19   linestyle=none]{\xstrut -a_s\frac{(A-2Z)^2}{A}}} +
20 \rnode[t]{ee}{\psframebox*[fillcolor=yellow,
21   linestyle=none]{\xstrut E_p}}
22 \end{equation}\[0.25cm]
23 \item dem \rnode{c}{Coulomb-Anteil}
24 \item der \rnode{d}{Symmetrieenergie}
25 \item sowie einem \rnode{e}{Paarbildungsbeitrag}.
26 \end{itemize}
27 \ncurve[angleA=-90,angleB=90]{->}{a}{ae}
28 \ncurve[angleB=45]{->}{b}{be}
29 \ncurve[angleB=-90]{->}{c}{ce}
30 \ncurve[angleB=-90]{->}{d}{de}
31 \ncurve[angleB=-90]{->}{e}{ee}

```

73 Special placement of displayed equations

73.1 Formulas side by side

Sometimes it may be useful to have numbered formulas side by side like the following ones:

$$\oint E ds = 0 \quad (73.1.a) \quad \nabla \cdot B = 0 \quad (73.1.b)$$

$$a = \frac{c}{d} \quad (73.2.a) \quad b = 1 \quad (73.2.b)$$

$$c = 1 \quad (73.3.a) \quad \int 2x dx = x^2 + C \quad (73.3.b)$$

And again a default display equation:

$$F(x) = \int_0^\infty \frac{1}{x} dx \quad (73.4)$$

```

1 \begin{mtabular}{*{2}{m{0.35\linewidth}m{0.15\linewidth}}}{
2 \begin{align*} \oint E ds=0 \end{align*} & \eqnCnt \%
3 & \begin{align*} \nabla \cdot B=0 \end{align*} & \eqnCnt[\\
   & \label{blah}]\}

```

```

4 \begin{align*} a = \frac{c}{d} \end{align*} & \eqnCnt \%
5 & \begin{align*} b = 1 \end{align*} & \eqnCnt \\
6 \begin{align*} c = 1 \end{align*} & \eqnCnt [\label{blub}]
7 & \begin{align*} \int 2x \, dx = x^2 + C \end{align*} & \eqnCnt
8 \end{mtabular}

```

The new environment `mtabular` has two arguments, one optional and one which is the same as the one from the `tabular` environment. With the option `long` it is possible to have all the formulas in a `longtable` environment, which allows a pagebreak. The new macro `\eqnCnt` controls the counting of these equations as subequations for one tabular line. This macro can have an optional argument for a label. At least it counts the equations. If the equation number is not centered to the foregoing equation, then it needs some more horizontal space in the tabular column.

`\eqnCnt[<optional label>]`

The vertical space is controlled by the length `mtabskip`, which is by default `-1.25cm` and can be modified in the usual way.

To define all these macros write into the preamble:

```

1 \usepackage{amsmath}
2 \newcounter{subequation}
3 %
4 \newlength\mtabskip\mtabskip=-1.25cm
5 %
6 \newcommand\eqnCnt[1][\{
7 \refstepcounter{subequation}%
8 \begin{align*}\end{align*}%
9 \addtocounter{equation}{-1}%
10 }
11 \def\mtabLong{long}
12 \makeatletter
13 \newenvironment{mtabular}[2][\empty]{%
14 \def\@xarraycr{%
15 \stepcounter{equation}%
16 \setcounter{subequation}{0}%
17 \@ifnextchar[\@argarraycr{\@argarraycr[\mtabskip]}%
18 }
19 \let\theoldequation\theequation%
20 \renewcommand\theequation{\theoldequation.\alph{subequation}}
21 \edef\mtabOption{#1}
22 \setcounter{subequation}{0}%
23 \tabcolsep=0pt
24 \ifx\mtabOption\mtabLong\longtable{#2}\else\table{#2}\fi%
25 }{%
26 \ifx\mtabOption\mtabLong\endlongtable\else\endtable\fi%
27 \let\theequation\theoldequation%
28 \stepcounter{equation}
29 }
30 \makeatother

```

As seen in equation 73.3.a and equation 73.1.b, everything is nonsense ...
And the following tabular is defined as a longtable to enable pagebreaks.

$$\oint E ds = 0 \quad (73.5.a) \quad \nabla \cdot B = 0 \quad (73.5.b)$$

$$a = \frac{c}{d} \quad (73.6.a) \quad b = 1 \quad (73.6.b)$$

$$c = 1 \quad (73.7.a) \quad \int 2x dx = x^2 + C \quad (73.7.b)$$

$$\oint E ds = 0 \quad (73.8.a) \quad \nabla \cdot B = 0 \quad (73.8.b)$$

$$a = \frac{c}{d} \quad (73.9.a) \quad b = 1 \quad (73.9.b)$$

$$c = 1 \quad (73.10.a) \quad \int 2x dx = x^2 + C \quad (73.10.b)$$

$$\oint E ds = 0 \quad (73.11.a) \quad \nabla \cdot B = 0 \quad (73.11.b)$$

$$a = \frac{c}{d} \quad (73.12.a) \quad b = 1 \quad (73.12.b)$$

$$c = 1 \quad (73.13.a) \quad \int 2x dx = x^2 + C \quad (73.13.b)$$

$$\oint E ds = 0 \quad (73.14.a) \quad \nabla \cdot B = 0 \quad (73.14.b)$$

$$a = \frac{c}{d} \quad (73.15.a) \quad b = 1 \quad (73.15.b)$$

$$c = 1 \quad (73.16.a) \quad \int 2x dx = x^2 + C \quad (73.16.b)$$

As seen in equation 73.13.a and equation 73.11.b, everything is nonsense

...

And again a default display equation:

$$F(x) = \int_0^\infty \frac{1}{x} dx \quad (73.17)$$

```

1 \begin{mtabular}[long]{*{2}{m{0.375\linewidth}m{0.125\linewidth}}}
2 \begin{align*} \oint E ds=0 \end{align*} & \eqnCnt \%
3 & \begin{align*} \nabla \cdot B=0 \end{align*} & \eqnCnt\\
4 \begin{align*} a =\frac{c}{d} \end{align*} & \eqnCnt \%
5 & \begin{align*} b = 1 \end{align*} & \eqnCnt\\
6 \begin{align*} c =1 \end{align*} & \eqnCnt
7 & \begin{align*} \int 2x dx = x^2+C \end{align*} & \eqnCnt\\
8
9 [ ... ]

```

73.2 Formulas inside an itemize enviroment

Without any modification it is not possible to get a numbered equation at the same height as the symbol of the itemize environment. This depends on the `\abovedisplayskip`. The formula has to be raised up for exactly this length.

```

1 \def\itemMath#1{%
2   \raisebox{-\abovedisplayskip}{%
3     \parbox{0.75\linewidth}{%
4       \begin{equation}#1\end{equation}}}%
5   \%
6 \begin{itemize}
7 \item \itemMath{ f = 1 }
8 \item \itemMath{ g(x) = \int f(x) dx }
9 \end{itemize}

```

- $f = l$ (73.18)

- $g(x) = \int f(x)dx$ (73.19)

Part VII

Lists, bibliography and index

List of Figures

Figure		Page
1	<code>multline</code> Alignment demo (the fourth row is shifted to the right with <code>\shoveright</code>)	50
2	Demonstration of <code>\multlinegap</code> (default is 0pt)	50

List of Tables

Table		Page
1	Meaning of <code>\mathsurround</code>	6
2	Difference between the default <code>\bigg</code> and the <code>\biggm</code> command	20
3	Use of the different parentheses for the “big” commands . . .	21
4	Old font style commands	24
5	Fonts in math mode	25
6	The meaning of the math spaces	26
7	Spaces in math mode	26
8	Math styles	31
9	Dots in math mode	32
10	Accents in math mode	32
11	Vectors with package <code>esvect.sty</code> (in the right column the default one from L ^A T _E X)	35
12	The predefined operators of <code>fontmath.ltx</code>	35
13	The predefined operators of <code>latex.ltx</code>	36
14	The greek letters	37
15	Comparison between the different align environments with the same code, where the first three can have an equation number	43
16	Matrix environments	55
17	binom commands	58
18	The modulo commands and their meaning	59
19	Different mathcommands	69
20	The predefined operators of <code>amsopn.sty</code>	86
21	Predefined math symbols from <code>fontmath.ltx</code>	95
22	New symbols in combination with the equal sign	97

References

- [1] Paul W. Abrahams, Karl Berry, and Kathryn Hargreaves. *T_EX for the Impatient*. <http://tug.org/ftp/tex/impatient/book.pdf>, 2003.
- [2] Claudio Beccari. Typesetting mathematics for science and technology according to iso 31/xi. *TUGboat Journal*, 18(1):39–47, 1997.
- [3] Thierry Bouche. Diversity in math fonts. *TUGboat Journal*, 19(2):121–135, 1998.
- [4] David Cobac. *Atelier documents mathématiques*. <http://crdp.ac-lille.fr/crdp2003/archives/latex/Ateliers/Atelier2/Presentation4.pdf>, 2004.
- [5] David Cobac. *Ecrire des mathématiques avec L^AT_EX*. <http://crdp.ac-lille.fr/crdp2003/archives/latex/Ateliers/Atelier2/prepDocMaths.pdf>, 2004.
- [6] Michael Downes. *Technical Notes on the amsmath package*. American Mathematical Society, <ftp://ftp.ams.org/pub/tex/doc/amsmath/technote.pdf>, 1999.
- [7] Michael Downes. *Short Math Guide for L^AT_EX*. American Mathematical Society, <http://www.ams.org/tex/short-math-guide.html>, 2002.
- [8] Victor Eijkhout. *T_EX by Topic*. <http://www.eijkhout.net/tbt/>, 1992.
- [9] J. Anthony Fitzgerald. *Web Math Formulas Using T_EX*. <http://www.unb.ca/web/Sample/math/>, 1997.
- [10] Michel Goossens, Frank Mittelbach, and Alexander Samarin. *The L^AT_EX Companion*. Addison Wesley, 13 edition, 1994.
- [11] George Grätzer. *Math into L^AT_EX*. Birkhäuser Boston, third edition, 2000.
- [12] Donald E. Knuth. *The T_EXbook*. Addison Wesley Professional, 21 edition, 1986.
- [13] Donald E. Knuth, Tracy Larrabee, and Paul M. Roberts. *Mathematical Writing*. Stanford University, Computer Science Department, <http://sunburn.stanford.edu/~knuth/papers/mathwriting.tex.gz>, 1987.

- [14] R. Kuhn, R. Scott, and L. Andreev. *An Introduction to using L^AT_EX in the Harvard Mathematics Department*. Harvard University, Department of Mathematics, <http://abel.math.harvard.edu/computing/latex/manual/texman.html>.
- [15] Johannes Küster. *Designing Math Fonts*. <http://www.typoma.com/publ/20040430-bachotex.pdf>, apr 2004. Vortrag auf der polnischen TeX-Konferenz »BachoTeX«.
- [16] Johannes Küster. *Fonts for Mathematics*. <http://www.typoma.com/publ/20041002-atypi.pdf>, oct 2004. Vortrag auf der ATypI-Konferenz in Prag.
- [17] Richard Lawrence. Math=Typography? *TUGboat Journal*, 24(2):165–168, 2003.
- [18] NIST. *Typefaces for Symbols in Scientific Manuscripts*. <http://physics.nist.gov/Document/typefaces.pdf>, 2004.
- [19] Luca Padovani. Mathml formatting with tex rules and tex fonts. *TUGboat Journal*, 24(1):53–61, 2003.
- [20] Sebastian Rahtz and Leonor Barroca. A style option for rotated objects in L^AT_EX. *TUGboat Journal*, 13(2):156–180, July 1992.
- [21] Steve Seiden. *Math cheat sheet*. TUG, <http://www.tug.org/texshowcase/#math>, 2000.
- [22] Carole Siegfried and Herbert Voß. Mathematik im Inline-modus. *Die T_EXnische Komödie*, 3/04:25–32, November 2004.
- [23] Paul Taylor. *Commutative Diagrams in T_EX*. Department of Computer Science, Queen Mary and Westfield College, <http://www.dcs.qmw.ac.uk/~pt/diagrams/>, 2000.
- [24] Herbert Voß. Farbige Mathematik. *Die T_EXnische Komödie*, 2/04:81–87, March 2004.

Index

Symbols

\,, 33

\:, 33

\;, 33

A

\above, 85

\abovedisplayshortskip, 35

\abovedisplayshortskip, 77

\abovedisplayskip, 35

\abovedisplayskip, 77

\abovewithdelims, 86

Accent, 90

\acute, 39

\allowdisplaybreaks, 45

amscd.sty, 91

array, 55

\arraystretch, 37

Arrows, 74

\atop, 24, 45, 69

\atop, 86

\atopwithdelims, 86

B

\bar, 39

\belowdisplayshortskip, 35

\belowdisplayshortskip, 77

\belowdisplayskip, 35

\belowdisplayskip, 77

\bf, 31

\Big, 26

\big, 26

\Bigg, 26

\bigg, 26

\Biggm, 27

\biggm, 27

\Bigl, 27

\bigl, 27

\Bigm, 27

\bigm, 27

\bigr, 27

Binom, 45

\binoppenalty, 89

\Bmatrix, 62

\bmatrix, 62

Bold greek letters, 76

\boldmath, 46

\bordermatrix, 22

\boxed, 75

boxed inline math, 12

Braces, 94

– Problems, 70

\breve, 39

C

\cal, 31

Cases

– numbered lines, 105

\cases, 20, 60

\cdots, 39

centertags, 49

\cfrac, 63

\chapter, 11

\check, 39

\choose, 45

\clap, 70

cmex10, 30

Color, 46

color, 111

\columncolor, 111

comma, 34

ctagsplit, 68

D

\ddddot, 62

\dddots, 39, 62

\ddot, 39

\ddots, 39

decimal point, 34

\delcode, 81

Delimiter, 14, 29

\delimiter, 81

\delimiterfactor, 30

\delimiterfactor, 77

`\delimitershortfall`, 30
`\delimitershortfall`, 78
`\dfrac`, 64
 Display math mode, 10
`\displaybreak`, 45
`\displayindent`, 78
`\displaylimits`, 86
`\displaystyle`, 11, 38, 64
`\displaystyle`, 81
`\displaywidowpenalty`, 89
`\displaywidth`, 79
`\dot`, 35
`\dot`, 39
`\dotsb`, 39
`\dotsc`, 39
`\dotsi`, 39
`\dotsm`, 39
`\dotso`, 39
 double stroke, 31
`dsfont`, 31

E

`\ensuremath`, 45
`\eqno`, 86
 Equation
 – number, 68
 – numbering, 66
 Equation number, 68
`esvect.sty`, 41
`\EuScript`, 98
`\everydisplay`, 48
`\everydisplay`, 87
`\everymath`, 48
`\everymath`, 87
 Exponent, 42
 Extensible arrows, 74

F

`\fam`, 82
`\fbox`, 18
`fleqn`, 49
 Font size, 38
`fontmath.ltx`, 29
`\frac`, 45

Fraction, 11, 63
`\frac`, 63
 Framed inline math, 12

G

gather, 56
`\genfrac`, 63
`\grave`, 39
 Greek, 43
 greek, 44
 – bold, 44
 – upright, 44

H

Harpoon, 102
`\hat`, 39
`\hdotsfor`, 62
`\hphantom`, 33, 34, 115
`\hspace`, 33
`\Huge`, 38
`hyperref.sty`, 12

I

`\imath`, 40
 Indices, 42
`\int`, 11, 98
 Integral symbols, 101
`\intertext`, 73
`intlimits`, 49
`\it`, 31
 Italic, 30, 71
`itemize`, 124

J

`\jmath`, 40
`\jot`, 36

K

`\kern`, 33

L

Label, 18
`\label`, 68
`\Large`, 38
`\large`, 38

`\ldots`, 39
`\left`, 26
`\left`, 87
 Left aligned, 54
`leqno`, 49
`\leqno`, 87
`\lim`, 11
 Limits, 24, 43, 69, 71
`\limits`, 11
`\limits`, 87

M

`\mapstofill`, 74
 Math operator, 11
 Math unit, 66
`\mathaccent`, 82
`\mathbb`, 31
`\mathbf`, 31
`\mathbin`, 82
`\mathcal`, 31
`\mathchar`, 82
`\mathchardef`, 83
`\mathchoice`, 83
`\mathclap`, 70, 115
`\mathclose`, 83
`\mathcode`, 83
`\mathds`, 31
`\mathfrak`, 31
`\mathindent`, 49
`\mathinner`, 87
`\mathit`, 31
`\mathop`, 84
`\mathopen`, 84
`\mathord`, 35
`\mathord`, 84
`\mathpunct`, 35
`\mathpunct`, 84
`\mathrel`, 84
`\mathring`, 39
`\mathrm`, 31, 72
`\mathsf`, 31
`\mathsurround`, 13
`\mathsurround`, 79
`\mathtt`, 31

`\mathversion`, 46
`\matrix`, 62
`\mbox`, 72
`\medmuskip`, 79
`\medspace`, 33
`\mkern`, 79
`\mskip`, 79
 Multiple exponents, 42
`multline`, 58
`\multlinegap`, 58
`\muskip`, 80
`\muskipdef`, 80

N

`namelimits`, 49
`\negmedspace`, 33
`\negthickspace`, 33
`\negthinspace`, 33
`nointlimits`, 49
`\nolimits`, 88
`nonamelimits`, 49
`\nonscript`, 80
`\nonumber`, 14, 15
`nosumlimits`, 49
`\nulldelimiterspace`, 80

O

Operator, 42
 – names, 71
 – size, 99
`\operatornamewithlimits`, 71
`\over`, 88
`\overbrace`, 39, 113
`\overbracket`, 40
`\overleftarrow`, 39
`\overleftrightarrow`, 39
`\overline`, 39
`\overline`, 88
`\overrightarrow`, 39, 41
`\overset`, 76
`\overwithdelims`, 88

P

Pagebreak, 45
Paket

– `setspace`, 37

`\parbox`, 61

`\phantom`, 34, 106

`\pmatrix`, 62

`\pmb`, 76

`\postdisplaypenalty`, 89

`\predisplaypenalty`, 89

`\predisplaystyle`, 80

`\prod`, 11, 24

`pstricks.sty`, 91

Q

`\qquad`, 33

`\quad`, 33

R

`\radical`, 88

Reference, 18

`\reflectbox`, 39

`\relpenalty`, 89

`reqno`, 49

`\right`, 26

`\right`, 89

`righttag`, 68

`\rm`, 31

Root, 25, 65

`\rowcolor`, 111

S

`\scriptfont`, 84

`\scriptscriptfont`, 84

`\scriptscriptstyle`, 38

`\scriptscriptstyle`, 85

`\scriptspace`, 80

`scriptstyle`, 11

`\scriptstyle`, 11, 38, 64

`\scriptstyle`, 85

`\section`, 11

Set symbol, 31

`\shoveright`, 58

`\sideset`, 71

Size

– Operator, 99

`\skew`, 85

`\skewchar`, 85

`\smallmatrix`, 62

Spacing

– vertical, 37

Split equation, 55

`\sqrt`, 25

Stacked limits, 70

`\stackrel`, 45

Style, 38

Subequations, 67

Subscript, 11

`\substack`, 69, 70, 114, 115

`\sum`, 11, 24, 71, 98

`sumlimits`, 49

Superscript, 11

T

`\tag`, 18

`tbtags`, 49

`\texorpdfstring`, 12

Text, 30

– `\parbox`, 31

`\textfont`, 85

`\textstyle`, 38

`\textstyle`, 85

`\tfrac`, 64

`\thickmuskip`, 80

`\thickspace`, 33

`\thinmuskip`, 80

`\thinspace`, 33

`\tilde`, 39

`\tt`, 31

U

`\unboldmath`, 46

`\underbar`, 39

`\underbrace`, 39, 113, 114

`\underbracket`, 40

`\underleftarrow`, 39

`\underleftarrow`, 39

`\underline`, 39, 48

`\underline`, 89

`\underrightarrow`, 39

`\underset`, 76, 116

`\uproot`, 64

V

`\vcenter`, [89](#)

`\vdots`, [39](#)

`\vec`, [39](#)

Vector, [41](#), [109](#)

Vertical spacing, [37](#)

`\Vmatrix`, [62](#)

`\vmatrix`, [62](#)

`\vphantom`, [26](#), [115](#)

`\vskip`, [37](#)

W

`\widehat`, [39](#)

`\widetilde`, [39](#)

X

`\xleftarrowpoondown`, [102](#)

`\xleftarrowpoonup`, [102](#)

`\xleftrightharpoons`, [102](#)

`\xrightarrowpoondown`, [102](#)

`\xrightarrowpoonup`, [102](#)

`\xrightleftharpoons`, [102](#)

`\xymatrix`, [99](#)

`xypic.sty`, [91](#)